SHYLON®

2022.8

www.shylon.com

SHYLON®

2022.8

SHYLON
芯龙光电

WIPO
WORLD INTELLECTUAL PROPERTY ORGANIZATION

Shanghai Shylon Optoelectronics
Technology CO., LTD.
Shylon Industrial Park
No.1186-1, Pengqing Rd
Huaqiao
Kunshan
Jiangsu
China

June 14, 2022

Dear Sir or Madam,

On behalf of the Director General of the World Intellectual Property Organization (WIPO), I have the pleasure to invite you to participate at the *Ceremony of Global Awards* during the Sixty-Third Series of Meetings of the Member States of WIPO, to be held on July 19, 2022.

The Ceremony will take place in the WIPO Conference Hall.

As one the five winners of the Global Awards Program for SMEs you are also kindly invited to participate at the *Clinic on IP for commercialization for SMEs* that will take place on July 18 and 19, 2022.

My colleagues will revert in due time on the event setting, including the travel and accommodation practical arrangements.

Should you need further information, please contact my colleague Ms. Lucija Ljubic (email: lucija.ljubic@wipo.int).

I very much look forward to your participation at the ceremony of awards and the clinic for the winners.

Yours sincerely,

Marcelo Di Pietro
Director
WIPO Awards

34, chemin des Colombettes
CH-1211 Geneva 20, Switzerland
T +41 22 338 91 11 F +41 22 733 54 28
www.wipo.int






世界知识产权组织总干事 邓鸿森先生
Daren Tang，WIPO Director General



世界知识产权组织副总干事 王彬颖女士
Wang Binying，WIPO Deputy Director General

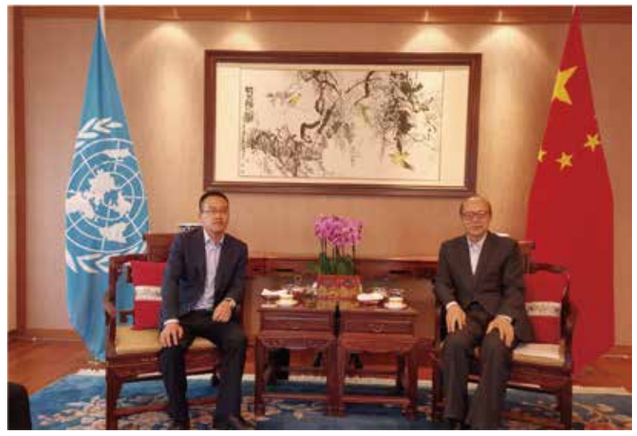

中华人民共和国驻联合国日内瓦
办事处和瑞士其他国际组织特命全权大使、常驻代表 陈旭大使

Shanghai SHYLON Optoelectronics Technology Co., Ltd.

Architectural+Landscape Lighting·Smart City+ Innovative Sight Experiences

Based on the European original design and Shanghai smart manufacturing, SHYLON condenses the strategic advantages of "One Brand, Global Market, Superhigh Optical Architecture, Zoomneo Color Algorithm, Anecast laser projection ".
SHYLON Provides professional and comprehensive solutions for you. The Anecast, a brand committed to the inspired exceptional sight experiences, create a new category of outdoor projection.

SERVICE NETWORK

With locations in countries around the world, SHYLON provide you local services. See our office locations across all regions.
Global: USA·Germany·UAE·Korea·Hong Kong·Thailand·Malaysia
China: Shanghai·Bejing·Shenzhen·Chengdu·Guangzhou·Xian

SMART FACTORY

- Location: 1186-1 Pengqing Road, Huaqiao, Kunshan, Jiangsu, China
- Area: 33,000 square meters
- Investment: 160 million yuan
- Workshop: 9 workshops with 86.25% automated production
- Capacity: 8000-10000 sets per day

PARTNERS & CLIENTS

SHYLON maintains strong strategic partnership with numerous famous design institutes, project contractors, and 16 overseas lighting brands.
SHYLON participated in 126 domestic/foreign influential projects in 2021:
•12 lighting projects of historical building for Celebrating the 100th anniversary of the founding of the Communist Party
•Shanghai EXPO Cultural Park
•Shanghai Yu Garden
•Westlake University
•Alibaba Cloud Yungu Park
•10 Pavilions in Dubai Expo 2020
•Multiple sub-projects in FIFA World Cup Qatar 2022
•Central Business District at the New Administrative Capital of Egypt, which project with the largest supply quantity of lighting products from China so far.

QUALIFICATION

•National High-Tech Enterprise
•Technologically Advanced Small and Medium-sized Enterprises of 2021" by Ministry of Industry and Information Technology
•Shanghai Patent Pilot Enterprise;
•Innovation “Little Giant” Enterprise in Putuo District of Shanghai;
•AAA-level Quality Service Credit Enterprise;
•AAA Level Credit Enterprise;

INTERNATIONAL AWARDS

SHYLON won 7 Red Dot design awards and 1 IF Design Award from 2020 to 2021, breaking the award record of Chinese lighting enterprises in the field of outdoor landscape lighting and architectural lighting, and set the three “most” in Chinese lighting industry:
•The professional lighting brand with the most Red Dot Awards in the world in 2021 ;
•The Chinese outdoor lighting brand with the most Red Dot Awards since the establishment of the Award.
•The professional lighting brand with the most red dot awards for outdoor linear lamps in the world.

In July, 2022, SHYLON Won the First-Ever WIPO Global Awards from among 272 submissions from 62 Countries Worldwide.

上海芯龙光电科技股份有限公司

SHYLON专业建筑 · 景观 · 智慧城市服务品牌

秉承欧洲原创设计理念+上海智造的双重优势，沉淀形成了“一个品牌，全球市场，Superhigh光学架构，Zoomneo色彩算法，Anecast激光影像”的战略优势；坚持为客户提供专业，一体化的综合解决方案。
旗下品牌Anecast安影，致力于城市光影艺术复兴，开创户外影像新物种。

服务网络 | Service Network

SHYLON服务网络广泛分布在美国、欧洲、中东、韩国、香港、泰国、马来西亚等地；同时在上海设有全球营销中心，在北京、深圳、成都、西安均有服务办公室。

智造工厂 | Factory

SHYLON工厂位于昆山花桥蓬青路1186–1号，占地面积50亩，总投资1.6亿元。
• 拥有9个自动化率达86.25%的生产车间；
• 照明及投影产品日产8000套~10000套/天；
• 复旦大学信息学院光源与照明工程系产学研合作基地。

合作客户 | Partners

SHYLON　与国内名设计院所、工程服务商以及16家国外照明品牌保持着良好的战略合作关系。
2021年先后参与了多个国内、外知名项目，例如: 建党100年之际，深度参与了12个历史红色名建的整体夜景亮化：中共二大会址、中共四大纪念馆上海茂名路毛泽东故居、嘉兴火车站等，以及上海世博文化公园北园整体亮化工程、上海豫园二期夜景提升、西湖大学夜景亮化阿里云谷夜景亮化工程等126个工程项目。
在海外市场上芯龙光电助力2021年迪拜世博会十个展馆光影秀场，同时正在供货卡塔尔世界杯多个分项目，以及正在服务的埃及新首都CBD项目, 该项目是中国照明品牌出海国外市场，迄今为止供货数量最多的一个项目。

资质荣誉 | Qualification & Honor

• 国家高新技术企业
• 2021国家工信部专精特新“小巨人“企业
• 上海市专利试点企业
• 普陀区科技创新型 “小巨人“企业
• 质量服务信誉AAA级诚信企业
• AAA级信用企业
• 3・15诚信服务会员单位等多项荣誉

资质荣誉 | Qualification & Honor

2020~2021两年荣获7个红点奖 和一个IF 奖，打破了中国照明企业在户外景观、建筑照明领域的获奖记录，创下三个行业之“最”：
• 2021年全球获红点奖最多的专业照明品牌
• 红点奖开设以来获奖最多的中国户外照明品牌
• 户外线条形类灯具获红点奖最多的全球专业照明品牌

2022年，SHYLON 从全球62个国家的272家公司中脱颖而出，荣获首届WIPO全球奖。

环保和健康
Environmental protection and health

每一次创新都将引领时代潮流
Every innovation well lead the trend of the times

随芯而动,艺无止境
With the core and moving,endles arts


光和影,让世界更美好
Light and Shadow, make a better world.



中共二大纪念馆
Memorial Hall of the second National Congress of the Communist Party of China





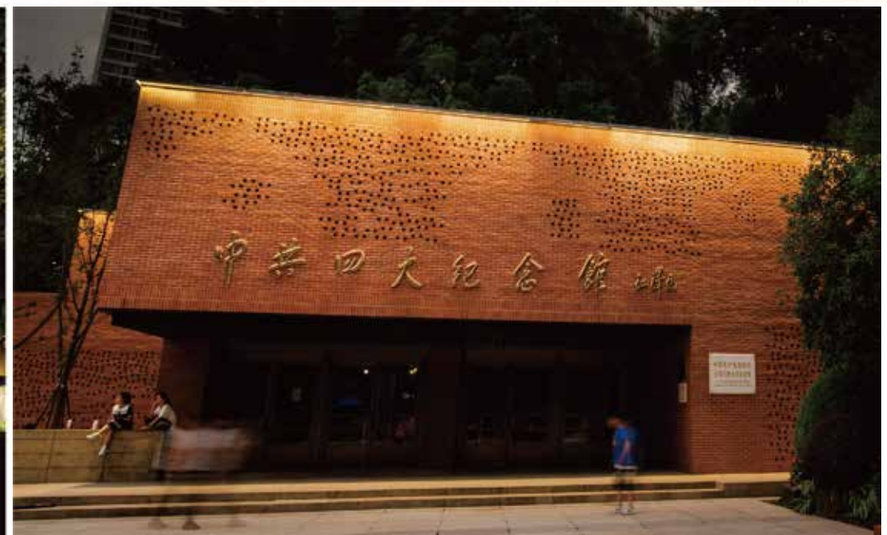



上海世博文化公园
Shanghai World Expo Cultural Park




上海豫园
Shanghai Yu Garden







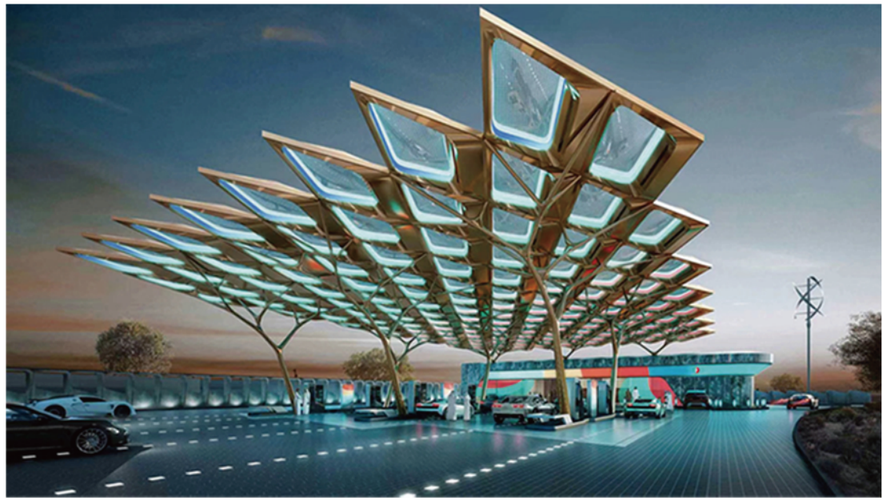





EXPO 2020 إكسبو
دبي، الإمـــارات العربيـة المتحـدة
DUBAI, UNITED ARAB EMIRATES



产品应用多达10个展馆

芯龙光电为本届世博会提供了2647套照明产品及系统，其中包括芯龙自主研发的SL2169LED地埋灯及今年荣获红点奖的SL1301H大功率洗墙灯，用一流的品质，彰显科技风采，在全球舞台上打造中国名片！

阿里巴巴云谷园区
Alibaba cloud Valley Park




ICAS
INGEER CERTIFICATION ASSESSMENT SERVICES
管理体系认证证书
上海芯龙光电科技有限公司
芯龙创新光电（昆山）有限公司
91310107558602280R/91320583MA1MQMDH2K
上海市普陀区绥德路 2 弄 52 号
昆山市花桥镇康营路 1186-1 号 3 号房
上海市普陀区绥德路 1 弄 1 号 106 室
昆山市花桥镇康营路 1186-1 号 2、3、4 号厂房
GB/T19001-2016/ISO9001:2015 质量管理体系要求
上海芯龙光电有限公司：道路与街路灯照明灯具、庭院灯（高度在 2.5 米以上）、LED 射灯制定式 LED 灯具的外销/芯龙创新光电（昆山）有限公司：道路与街路灯照明灯具、庭院灯（高度在 2.5 米以上）、LED 射灯制定式 LED 灯具的生产和外销
IAF


ICAS
INGEER CERTIFICATION ASSESSMENT SERVICES
管理体系认证证书
上海芯龙光电科技有限公司
91310107558602280R
上海市普陀区绥德路 2 弄 52 号
上海市普陀区绥德路 1 弄 1 号 106 室


INGEER CERTIFICATION ASSESSMENT SERVICES
管理体系认证证书
上海芯龙光电科技有限公司
91310107558602280R
上海市普陀区绥德路 2 弄 52 号
上海市普陀区绥德路 1 弄 1 号 106 室
道路与街路灯照明灯具、庭院灯（高度在 2.5 米以上）、LED 射灯制定式 LED 灯具的销售


中国国家强制性产品认证证书
中国质量认证中心


CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION
CHINA QUALITY CERTIFICATION CENTRE


intertek
AUTHORIZATION TO MARK
Intertek


CE
Attestation of Conformity
Holder of Certificate: Shanghai Shylon Optoelectronics Technology Co., Ltd.
Product: Fixed general purpose luminaires LED light
Tested according to:


CNAS
中国合格评定国家认可委员会
实验室认可证书
（注册号：CNAS L16135）
上海芯龙光电有限公司
江苏省苏州市昆山市花桥镇康营路 1186-1 号，215332


CNAS
China National Accreditation Service for Conformity Assessment
LABORATORY ACCREDITATION CERTIFICATE
(Registration No. CNAS L16135)
Shanghai SHYLON Optoelectronics Technology Co., Ltd.
Testing Center


Certificate
Red Dot Winner 2020
SL1135TE-16


Certificate
Red Dot Winner 2020
SL1319AF-18


Certificate
Red Dot Winner 2021
SL1232FZ-06


Certificate
Red Dot Winner 2021
SL1307E-20


Certificate
Red Dot Winner 2021
SL2304-288


Certificate
Red Dot Winner 2021
SL1301H-24


Certificate
Red Dot Winner 2021
SL3317L-48


DESIGN AWARD 2021
SL3317L-48
Outdoor Lamp


发明专利证书

目录 Contents

投射灯系列
Flood light series
P001–P168


SL1309


SL1307


SL1306


SL1305


SL1301


SL1302


SL1303


SL1323


SL1322


SL1321


SL1351


SL1352


SL1130


SL1131


SL1132F


SL1135F


SL1136F


SL1137F


SL1139F



SL1150F


SL1140F


SL1145F


SL1146F


SL1147F


SL1148F


SL1102U


SL1102F


SL1103U


SL1103F


SL1104U


SL1104F


SL1105U


SL1105F


SL1125F


SL1126F


SL1127F


SL1269U


SL1272U


SL1271U


SL1278U

SL1281U

SL1232F

SL1235F

SL1236F

SL1239F

SL1240U

SL1245U

SL1246U

SL1247U

SL1258U

SL1260U

SL1262U

SL1318

SL1318U


SL1319


SL1319U


SL1310

照树灯系列
LED Tree Light series
P169–P182


SL1132T


SL1135T


SL1136T


SL1137T

地埋灯系列
Inground light series
P183–P250


SL2311A


SL2311B


SL2311C


SL2312


SL1307P


SL2306


SL2307


SL2308


SL2309



SL2304


SL2305


SL2270


SL2269


SL2264


SL2169C


SL2166C


SL2164C


SL2162C


SL2161C


SL2160C


SL2152C


SL2150C


SL2130C


SL2128C


SL2112C


SL2110C


SL2109C


SL2106C


SL2103C


SL2102


SL2101


SL21005


SL21003

SL2108A

SL2108B

SL2104

轮廓灯系列
Outline light series
P251–P275

SL3315

SL3316

SL3317

SL3317L

SL3317S

SL3321

SL3322

SL3312

SL3351

SL3352

SL3353

SL3110

SL3121

SL3122

SL3123

SL3361

SL3362

SL3106

SL3210

SL3240

SL3230

SL3220

水下灯系列
Underwater light series
P276–P280

SL5109

SL5106

SL5119

SL5116

壁灯系列
Wall light series
P281–P294

SL6155

SL6156

SL6157

SL6122

SL6123

SL6125

路灯系列
Road light series
P295–P304

SL7500

SL7501

SL7502

SL7503

高天棚灯系列
LED Highbay light series
P305–P316

SL0180U

SL0180C

SL0181U

SL0181C

SL0182U

SL0182C

控制系统
Control system
P317–P326

SL–E2120K

SL–E3200

SL–M2220K

SL–M3300

SL–M3200R

SL–Y2000

SL–D100

SL–BT100

产品命名规则：如SL1135FE–16

Product naming rules：for example SL1135FE–16

SL	1	1	35	F	E	16
公司代号 Company code	灯具系列 lamps series	产品外形 Product shape	产品编号 Product code	安装方式 Installation mode	LED型号 LED mode	LED总颗数 LED Number
SHYLON简写 SHYLON shorthand	1.投射灯 Flood light	1.圆形 Round	按产品 系列编排 By product Series layout	投光灯F:法兰底座 Floodlight F: flange base	A:350mA XP–E2	1
DLS:订制 DLS: Custom made	2.地埋灯 Inground light	2.方形 square	无具体规则 No specific rules	投光灯U:U形支架 Floodlight U: U–shaped bracket	B:500mA/600mA XP–E2	2
	3.轮廓灯 Outline light	3.线形 linear	35E01：35为 产品编号,E01 为扩展版本名	投光灯M:Φ48灯杆安装件 Floodlight M: Φ 48 pole mounting part	C:700mA XP–E2	3
	5.水下灯 Underwater light	5.道路 road		投光灯S:地插或斜罩 Floodlight s: ground plug or inclined cover	D:1050mA XP–G2	……
	6.壁灯 Wall light	6.景观与艺术 Landscape and art		投光灯L:杆装螺丝固定件 Floodlight L: pole mounted screw Fixed parts	E:1400mA XP–L、XP–G3 OSRAR PRO 10W 3535 10W单颗	Road C: XT–E
	7.路灯 Road light	7.智慧路灯 Smart street lamp		投光灯H:抱树支架 Floodlight H: tree bracket	F:350mA/700mA RGBW 4in1;OSRAR PRO 10W 3535 10W单颗	Road M: LUXEON 5050
	8.激光照明 Laser illumination	8.太阳能路灯 Solar street lamp		投光灯P:杆装抱箍 Floodlight p: pole mounted hoop	G:1000mA/2400mA X 4路 OSRAM OSTAR RGBW 4合1	Road HE: 高效率 Road HE: High efficiency
	0.高天棚灯 Highbay lamp			投光灯T:照树灯 Floodlight T: tree light	H:130mA CREE CLQ6A 4合1	路灯数字代表功率 Street lamp digital power
				投光灯G:U形支架加凸罩 Floodlight G: U–shaped bracket Convex cap	I:XHP35 700mA 12V	
				投光灯X:法兰底座加凸罩 Floodlight X: flange base Convex cap	J:350mA SORAM RGBW 4合1	
				投光灯R:实景测试灯 Floodlight R: real scene measurement Pilot lamp	K:XHP50 1050mA 12V	
				工矿灯U:无罩 Highbay light U: uncovered	L:5050 RGBW 10W单颗	
				工矿灯C:带铝罩 Highbay light U: with aluminum cover	M:OSRAR PRO 10W	
				地埋灯C:圆面板 Inground light C: Circular panel	N:RGB+LCA 6合1	
				地埋灯S:方面板 Inground light S: square panel	Z:变焦、动态电流 Z:Zoom、dynamic current	
				条灯U:平罩 Linear Light (U): Flat Cover		
				条灯C:弧形罩 Linear Light (C):Cambered cover		
				条灯L:水晶罩 Linear Light (L): Crystal Cover		
				条灯S:方形罩 Linear Light (S): Square Cover		

注：SL1318/SL1319/SL1310A.B.C.D.E.F.G作为型号区分

配件图例:

Accessories legend

圆孔格栅 Round–meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防滑玻璃 Anti–slip glass		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
防眩遮光罩 Anti–glare shield		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

zoomneo 色彩算法色域对比

zoomneo Color algorithm gamut contrast

RGBWCLA


RGBW

CIE1931

DCI-P3

Adobe-RGB

REC709

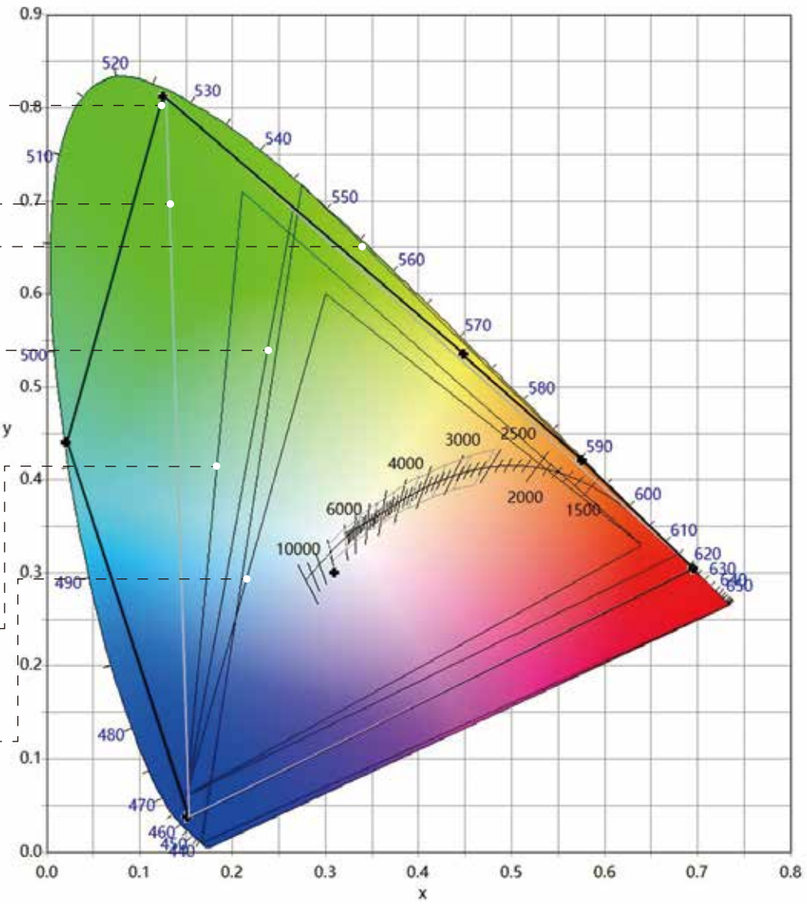

Superhigh 光学架构配光索引

Superhigh Optical structure light distribution index

	1800K–7000K	RGBWLCA	RGBW	RGB
1°	SL1132\SL1135\SL1136\SL1139\SL1140 SL1130\SL1131\SL1269\SL1272\SL1271 SL1278\SL1232\SL1235			
2°	SL1309\SL1307\SL1132\SL1135\SL1136 SL1137\SL1139\SL1150\SL1140\SL1145 SL1130\SL1131\SL1146\SL1269\SL1272 SL1271\SL1278\SL1281\SL1232\SL1235 SL1236\SL1239\SL1240\SL1245\SL1310 SL2311\SL2169\SL2164\SL2162\SL2161 SL2160\SL2270\SL2269\SL2264\SL2166 SL3210\SL1146		SL1309\SL1307\SL1132 SL1135\SL1232\SL1310	SL3210
3°	SL1132\SL1135\SL1136\SL1137\SL1139 SL1145\SL1272\SL1271\SL1278		SL1269\SL1272	SL1269\SL1272
4°	SL1130\SL1131\SL1269\SL1232\SL1235 SL1236\SL1239\SL1240\SL2169\SL2164 SL2162\SL2161\SL2270\SL2269\SL2264 SL2166		SL1269\SL1272	
5°	SL2160\SL2108		SL1132\SL1135\SL1140	SL1269\SL1272
6°	SL1309\SL1307\SL1132\SL1135\SL1136 SL1137\SL1139\SL1150\SL1140\SL1146 SL1272\SL1271\SL1278\SL1271\SL1245 SL1318\SL1319\SL1310\SL2311\SL2160 SL2150\SL1146		SL1272\SL1271\SL1278	
8°	SL1307\SL1306\SL1305\SL1302\SL1303 SL1132\SL1135\SL1136\SL1130\SL1131 SL1147\SL1102\SL1103\SL1104\SL1105 SL1125\SL1126\SL1269\SL1232\SL1235 SL1236\SL1239\SL1240\SL1245\SL1246 SL1258\SL1260\SL1262\SL1310\SL2312 SL2306\SL2307\SL2308\SL2169\SL2164 SL2162\SL2161\SL2160\SL2270\SL2269 SL2264\SL2166\SL2152\SL2150\SL2130\ SL2128\SL2110\SL2109\SL2106\SL2103 SL5109\SL5106\SL5119\SL5116\SL6155 SL6156\SL6157\SL6122\SL6123\SL6125 SL1147	SL1130\SL1131\SL1269\SL1272 SL1271\SL1278\SL1232\SL1235 SL1236\SL2270	SL1306\SL1145\SL1130 SL1131\SL1269\SL1272 SL1271\SL1278\SL1232 SL1235\SL1236\SL1239 SL1240\SL1260	SL1305\SL1301\SL1302 SL1303\SL1132\SL1135 SL1136\SL1102\SL1103 SL1104\SL1105\SL1258 SL1260\SL1262\SL2306 SL2307\SL2308\SL2152 SL2150\SL2130\SL2128 SL2110\SL2109\SL2106 SL2103\SL5109\SL5106 SL5119\SL5116
12°	SL1309\SLSL1307\SLSL1306\SLSL1305 SLSL1302\SLSL1303\SLSL1321\SL1132 SL1135\SL1136\SL1137\SL1139\SL1150 SL1140\SL1145\SL1130\SL1131\SL1146 SL1147\SL1102\SL1103\SL1104\SL1105 SL1125\SL1126\SL1269\SL1272\SL1271 SL1278\SL1281\SL1232\SL1235\SL1236 SL1239\SL1240\SL1245\SL1258\SL1260 SL1262\SL1318\SL1319\SL1310\SL2312 SL2306\SL2307\SL2311\SL2308\SL2169 SL2164\SL2162\SL2161\SL2160\SL2270 SL2269\SL2264\SL2166\SL2152\SL2150 SL2130\SL2128\SL2110\SL2109\SL2106 SL2103\SL21005\SL5109\SL5106\SL5119 SL5116\SL6155\SL6156\SL6157\SL6122 SL6123\SL6125\SL1246\SL1146\SL1147		SL1306\SL1130\SL1131 SL1269\SL1272\SL1239 SL1260\SL2169\SL2164 SL2162\SL2161\SL2270 SL2269\SL2264\SL2166 SL2150	SL1305\SL1301\SL1302 SL1303\SL1132\SL1135 SL1136\SL1102\SL1103 SL1104\SL1105\SL1258 SL1260\SL1262\SL2306 SL2307\SL2308\SL2152 SL2150\SL2130\SL2128 SL2110\SL2109\SL2106 SL2103\SL21005\SL5109 SL5106\SL5119\SL5116

	1800K–7000K	RGBWLCA	RGBW	RGB
15°	SL1307\SL1145\SL1125\SL1127\SL1240 SL2108\SL6157\SL6123\SL6125	SL1132\SL1135\SL1136 SL1130\SL1131\SL1232 SL1235\SL1236\SL2270	SL1309\SL1307\SL1351\SL1132 SL1136\SL1137\SL1139\SL1150 SL1140\SL1130\SL1131\SL1146 SL1281\SL1232\SL1235\SL1236 SL1240\SL1245\SL1318\SL1319 SL1310\SL2311\SL2169\SL2164 SL2162\SL2161\SL2160\SL2270 SL2269\SL2264\SL2166\SL2150 SL2130\SL1146	
20°	SL1309\SL1307\SL1132\SL1135\SL1136 SL1137\SL1139\SL1150\SL1140\SL1145 SL1130\SL1131\SL1146\SL1269\SL1272 SL1271\SL1278\SL1281\SL1232\SL1235 SL1236\SL1239\SL1240\SL1245\SL1310 SL2311\SL2169\SL2164\SL2162\SL2161 SL2160\SL2270\SL2269\SL2264\SL2166 SL3210\SL1246\SL1247\SL1146\SL1147 SL1148	SL1132\SL1135\SL1136 SL1130\SL1131\SL1269 SL1272\SL1271\SL1278 SL1232\SL1235\SL1236 SL2270	SL1309\SL1307\SL1306\SL1305\ SL1301\SL1303\SL1323\SL1322\ SL1351\SL1352\SL1132\SL1135\ SL1136\SL1137\SL1139SL1150\S L1140\SL1145SL1130\SL1131\SL 1146\SL1147\SL1269\SL1272\SL1 271\SL1278\SL1281\SL1232SL12 35\SL1236\SL1239\SL1240\SL124 5\SL1260\SL1318\SL1319SL1310\ SL2312\SL2311\SL2307\SL2169\ SL2164\SL2162\SL2161\SL2160\ SL2270\SL2269\SL2264\SL2166\ SL2150\SL2130\SL3315\SL1146\1 147	SL1305\SL1301\SL1302 SL1303\SL1132\SL1135 SL1146\SL1102\SL1103 SL1104\SL1105\SL1258 SL1260\SL1262\SL2306 SL2307\SL2308\SL2152 SL2150\SL2130\SL2128 SL2110\SL2109\SL2106 SL2103\SL21005\SL3315 SL3210\SL5109\SL5106 SL5119\SL5116
30°	SL1309\SLSL1307\SLSL1306\SLSL1305 SL1302\SL1303\SL1323\SL1321\SL1351 SL1352\SL1132\SL1135\SL1136\SL1137 SL1139\SL1150\SL1140\SL1130\SL1131 SL1146\SL1147\SL1148\SL1102\SL1103 SL1104\SL1105\SL1125\SL1126\SL1127 SL1269\SL1272\SL1271\SL1278\SL1281 SL1232\SL1235\SL1236\SL1239\SL1240 SL1245\SL1258\SL1260\SL1262\SL1318 SL1319\SL1310\SL2312\SL2306\SL2307 SL2311\SL2308\SL2169\SL2164\SL2162 SL2161\SL2160\SL2270\SL2269\SL2264 SL2166\SL2152\SL2150\SL2130\SL2128 SL2110\SL2109\SL2106\SL2103\SL21005 SL2108\SL3315\SL3316\SL3321\SL3351 SL3210\SL5109\SL5106\SL5119\SL5116 SL6155\SL6156\SL6157\SL6122\SL6123 SL6125\SL1246\SL1247\SL1146\SL1147 SL1148	SL1132\SL1135\SL1136 SL1130\SL1131\SL1232 SL1235\SL1236\SL2270	SL1309\SL1307\SL1306\SL1305 SL1303\SL1323\SL1322\SL1351 SL1352\SL1132\SL1135\SL1136 SL1137\SL1139\SL1150\SL1140 SL1130\SL1131\SL1146\SL1272 SL1281\SL1232\SL1235\SL1236 SL1239\SL1240\SL1245\SL1260 SL1318\SL1319\SL1310\SL2169 SL2164\SL2162\SL2161\SL2160 SL2270\SL2269\SL2264\SL2166 SL2150\SL2130\SL3315\SL3316 SL1146	SL1305\SL1301\SL1302 SL1303\SL1132\SL1135 SL1136\SL1102\SL1103 SL1104\SL1105\SL1258 SL1260\SL1262\SL2306 SL2307\SL2308\SL2152 SL2150\SL2130\SL2128 SL2110\SL2109\SL2106 SL2103\SL21005\SL3315 \SL3316\SL3321\SL5109 SL5106\SL5119\SL5116
40°	SL1309\SL1323\SL1351\SL1352\SL1132 SL1135\SL1136\SL1137\SL1139\SL1150 SL1140\SL1130\SL1131\SL1148\SL1102 SL1103\SL1104\SL1105\SL1125\SL1126 SL1269\SL1272\SL1271\SL1278\SL1281 SL1232\SL1235\SL1236\SL1239\SL1240 SL1245\SL1318\SL1319\SL1310\SL2311 SL2169\SL2164\SL2162\SL2161\SL2160 SL2270\SL2269\SL2264\SL2166		SL1301\SL1323\SL1322\SL1351 SL1352\SL1132\SL1130\SL1131 SL1147\SL1272\SL1232\SL1235 SL1236\SL1239\SL2307\SL3351 SL1246\SL1147	
45°	SL2306\SL2307\SL2312\SL2308\SL2152 SL2150\SL2130\SL2128\SL2110\SL2109 SL2106\SL2103\SL21005\SL3315\SL335 1\SL5109\SL5106\SL5119\SL5116\SL615 5\SL6156\SL6157\SL6122\SL6123\SL612 5\SL1247\SL1148		SL2312\SL3315	SL2306\SL2307\SL2308 SL2152\SL2130\SL2128 SL2110\SL2109\SL2106 SL2103\SL21005\SL3315 SL5109\SL5106\SL5119 SL5116
60°	SL1309\SL1307\SL1306\SL1305\SL1302 SL1303\SL1323\SL1321\SL1351\SL1352 SL1132\SL1135\SL1136\SL1137\SL1139 SL1150\SL1140\SL1130\SL1131\SL1147 SL1148\SL1102\SL1103\SL1104\SL1105 SL1125\SL1126\SL1269\SL1272\SL1271 SL1278\SL1281\SL1232\SL1235\SL1236 SL1239\SL1240\SL1245\SL1258\SL1260 SL1262\SL1310\SL2312\SL2306\SL2307 SL2311\SL2308\SL2169\SL2164\SL2162 SL2161\SL2160\SL2270\SL2269\SL2264 SL2166\SL2152\SL2150\SL2130\SL2128 SL2110\SL2109\SL2106\SL2103\SL2108 SL2104\SL3315\SL3316\SL3321\SL3351 SL3210\SL0180\SL0181\SL0182\SL1246 SL1247\SL1147\SL1148		SL1306\SL1301\SL1323\SL1322 SL1351\SL1352\SL1147\SL1272 SL1239\SL1260\SL2312\SL2307 SL2169\SL2150\SL3315\SL3316 SL3351\SL1246\SL1147	SL1305\SL1301\SL1302 SL1303\SL1102\SL1103 SL1104\SL1104\SL1105 SL1258\SL1260\SL1262 SL2306\SL2307\SL2308 SL2152\SL2150\SL2130 SL2128\SL2110\SL2109 SL2106\SL2103\SL3315 SL3316\SL3210


	1800K–7000K	RGBWLCA	RGBW	RGB
10x30°	SL1307		SL1309\SL1307\SL1146\SL SL1310\SL2311\SL1146	
15x30°	SL1306\SL1305\SL1302\SL1303 SL1147\SL1102\SL1103\SL1104 SL1105\SL1125\SL1126\SL1240 SL1258\SL1260\SL1262\SL1310 SL2312\SL2306\SL2307\SL2308 SL2169\SL2164\SL2162\SL2161 SL2270\SL2269\SL2264\SL2152 SL2150\SL2130\SL2128\SL2110 SL1246\SL1147		SL1306\SL1301\SL1147\SL1232 SL1235\SL1236\SL1239\SL1260 SL2312\SL1246	SL1305\SL1301\SL1302 SL1303\SL1102\SL1103 SL1104\SL1105\SL1258 SL1260\SL1262\SL2306 SL2307\SL2308\SL2152 SL2150\SL2130\SL2128 SL2110
15x40°	SL3351			SL2150
15x60°	SL1132\SL1235	SL1132\SL1135\SL1136\SL 1130\SL1131\SL1232\SL12 35\SL1236\SL2270	SL1301\SL1303\SL1132\SL1136 SL1137\SL1139\SL1150\SL1140 SL1145\SL1130\SL1131\SL1147 SL1281\SL1232\SL1235\SL1239 SL1240\SL1245\SL1318\SL1319 SL2312\SL2307\SL2169\SL2164 SL2162\SL2160\SL2270\SL2269 SL2264\SL2166\SL2150\SL2130 SL1246\SL1147	
10x45°		SL1269\SL1272\SL1271\SL 1278	SL1269\SL1272\SL1271\SL1278	
10x60°	SL1307\SL1306\SL1305\SL1302 SL1303\SL1132\SL1135\SL1145 SL1130\SL1147\SL1102\SL1103 SL1104\SL1105\SL1125\SL1126 SL1258\SL1260\SL1262\SL1310 SL2312\SL2306\SL2307\SL2308 SL2169\SL2164\SL2162\SL2161 SL2269\SL2270\SL2264\SL2152 SL2150\SL2130\SL2128\SL2110 SL1246\SL1147		SL1309\SL1307\SL1306\SL1305 SL1132\SL1135\SL1136\SL1130 SL1246\SL1260\SL1310\SL2311 SL1146	SL1305\SL1301\SL1302 SL1303\SL1132\SL1135 SL1136\SL1102\SL1103 SL1104\SL1105\SL1258 SL1260\SL1262\SL2306 SL2307\SL2308\SL2152 SL2150\SL2130\SL2128 SL2110
10x65°			SL3351	
10x70°	SL1309\SL1307\SL1132\SL1136 SL1137\SL1139\SL1150\SL1140 SL1130\SL1131\SL1146\SL1269 SL1272\SL1271\SL1278\SL1281 SL1232\SL1235\SL1236\SL1239 SL1240\SL1245\SL1318\SL1319 SL1310\SL2311\SL2169\SL2164 SL2162\SL2161\SL2160\SL2270 SL2269\SL2264\SL2166\SL2150 SL1146		SL1130\SL1131\SL1272\SL1239	
25x45°	SL1323\SL1321\SL1148\SL1247 SL1148		SL1323\SL1322\SL1351\SL1352 SL2150	
5x20°	SL1309\SL1307\SL1132\SL1135 SL1136\SL1137\SL1139\SL1140 SL1130\SL1131\SL1146\SL1269 SL1272\SL1271\SL1278\SL1281 SL1232\SL1235\SL1236\SL1239 SL1240\SL1245\SL1318\SL1319 SL1310\SL2311\SL2169\SL2164 SL2162\SL2161\SL2160\SL2270 SL2269\SL2264\SL2166\SL1146		SL1130\SL1131\SL1272\SL1239	SL3315
20x40°	SL1351\SL1352\SL1240\SL3315		SL1232\SL1235\SL1236\SL1239 SL3315	
20x30°			SL2169\SL2164\SL2162\SL2161 SL2270\SL2269\SL2264\SL2166	
18x50°	SL1351\SL1352			
120x70°	SL1351\SL1352			

	1800K–7000K	RGBWLCA	RGBW	RGB
120°	SL2306\SL2307\SL2308\SL2309 SL2304\SL2305\SL2102\SL2101 SL21005\SL21003\SL3315\SL33 16\SL3317\SL3321\SL3322\SL3 240\SL3230\SL3220\SL0180\SL 0181\SL0182		SL3315\SL3316\SL3317\SL3121 SL3122\SL3123\SL3240\SL3230 SL3230	SL2306\SL2307\SL2308 SL2309\SL2304\SL2305 SL2102\SL21005\SL3315 SL3316\SL3317\SL3321 SL3322\SL3121\SL3122 SL3123
>120°	SL3361\SLSL3362\SL3110\ SL3106			
180°	SL3352\SL3353		SL3352\SL3353	
120x50°	SL7500\SL7501\SL7502\SL7503			
150x65°	SL7500\SL7501\SL7502\SL7503			
150x60°	SL7500\SL7501\SL7502\SL7503			
140x30°	SL7500\SL7501\SL7502\SL7503			
148°	SL7500\SL7501\SL7502\SL7503			
90°	SL7500\SL7501\SL7502\SL7503			

Flood Light Series

SL1309

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

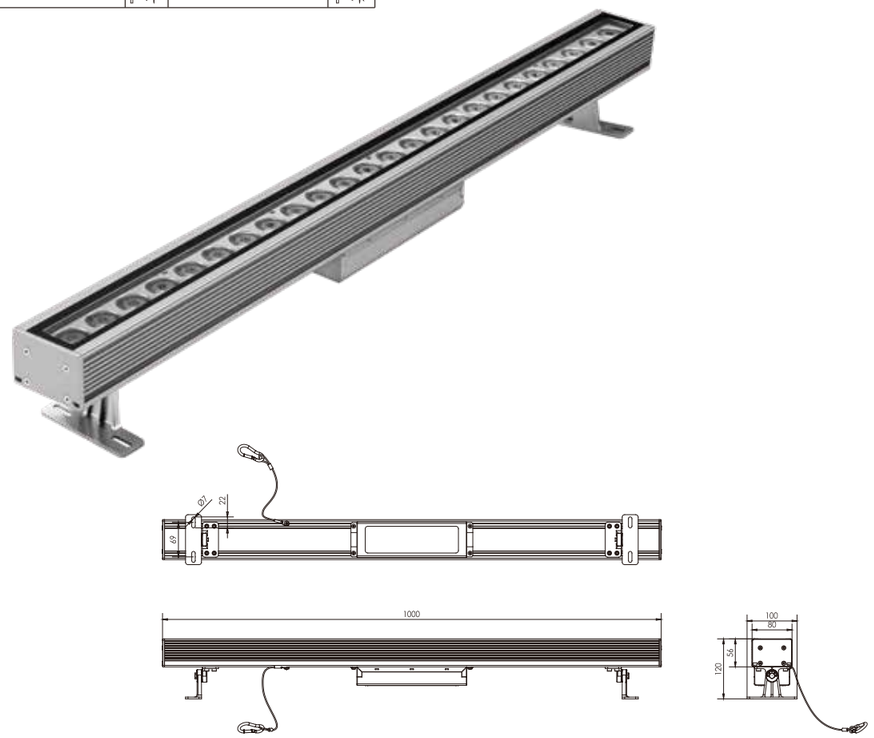

产品简介 Product Introduction

一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
四、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。

1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1309M-24	SL1309E-24	SL1309E-12(0.5m)	SL1309E-8(0.3m)
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE XP-L/OSRAM P9	CREE XP-L/OSRAM P9	CREE XP-L/OSRAM P9
Led数量/ Led Quantity	24pcs	24pcs	12pcs	8pcs
额定功率/ Rared Power	200W	200W	100W	60W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°		
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	20pcs
产品型号/ Product Code	SL1309N-24	SL1309F-24	SL1309F-12(0.5m)	SL1309F-8(0.3m)
Led品牌/ Led Brand	RGBWCLA 7in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led数量/ Led Quantity	24pcs	24pcs	12pcs	8pcs
额定功率/ Rared Power	200W	200W	100W	60W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	RGBW	RGBW
发光角度/ Beam Angle	15° 20° 30° 10X30° 10X60°			
控制方式/ Control Mode	DMX512	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	12pcs	6pcs	12pcs	20pcs




Flood Light Series

SL1307

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

reddot winner 2021



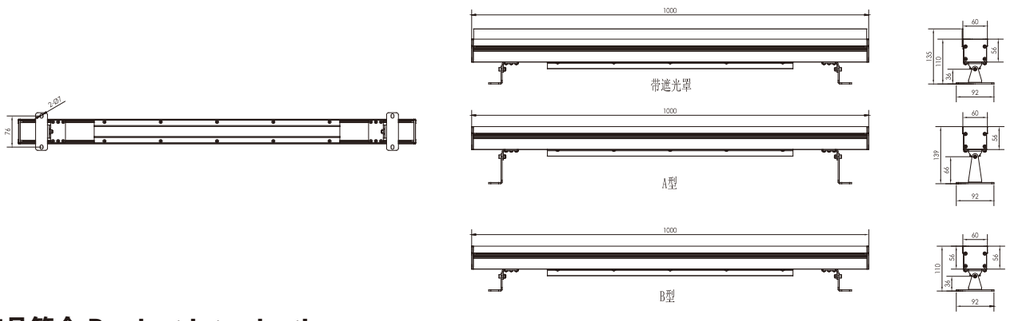

产品简介 Product Introduction


一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
四、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。

1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1307M-20	SL1307E-20	SL1307E-10(0.5m)	SL1307E-6(0.3m)
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	20pcs	20pcs	10pcs	6pcs
额定功率/ Rared Power	95W	95W	48W	30W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 60° 10X70° 5X20°		
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	20pcs
产品型号/ Product Code	SL1307N-20	SL1307F-20	SL1307F-10(0.5m)	SL1307F-6(0.3m)
Led品牌/ Led Brand	RGBWCLA 7in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led数量/ Led Quantity	20pcs	20pcs	10pcs	6pcs
额定功率/ Rared Power	100W	100W	50W	30W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/
颜色 / Color	RGBWCLA	RGBW	RGBW	RGBW
发光角度/ Beam Angle	15° 20° 30° 10X30° 10X60°			
控制方式/ Control Mode	DMX512	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	40pcs	12pcs	25pcs	40pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1307 15°



SL1307 10X30°




Flood Light Series

SL1306

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



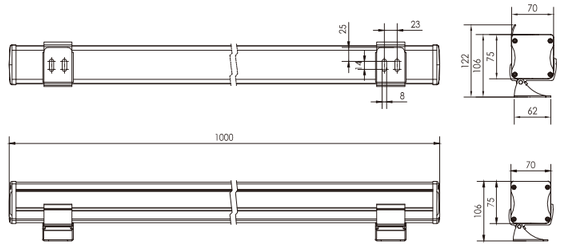

产品简介 Product Introduction


一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
四、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。

1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/Product Code	SL1306B–54	SL1306A–54	SL1306B–27(0.5m)	SL1306A–27(0.5m)
LED品牌/LED Brand	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
LED数量/LED Quantity	54pcs	54pcs	27pcs	27pcs
额定功率/Rated Power	108W	60W	54W	30W
输入电压/Input Voltage	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15X30° 10X60°			
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	1/20(pcs)	2/20(pcs)	2/24(pcs)	4/44(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1306 5°






SL1306 8°






SL1306 15°






SL1306 30°






SL1306 45°






SL1306 10x60°






SL1306 16x55°





SL1306 15x30°




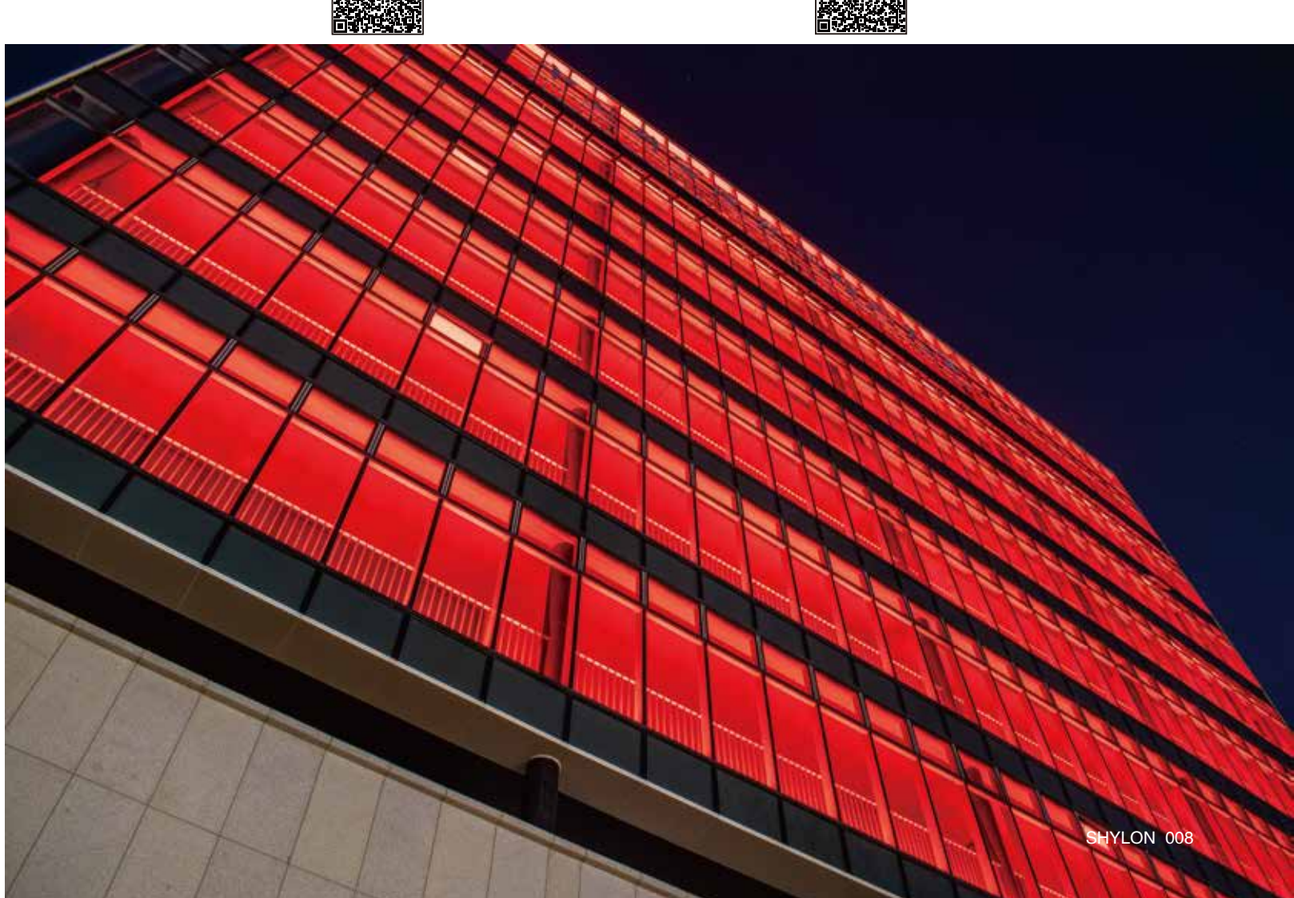


Flood Light Series

SL1305

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

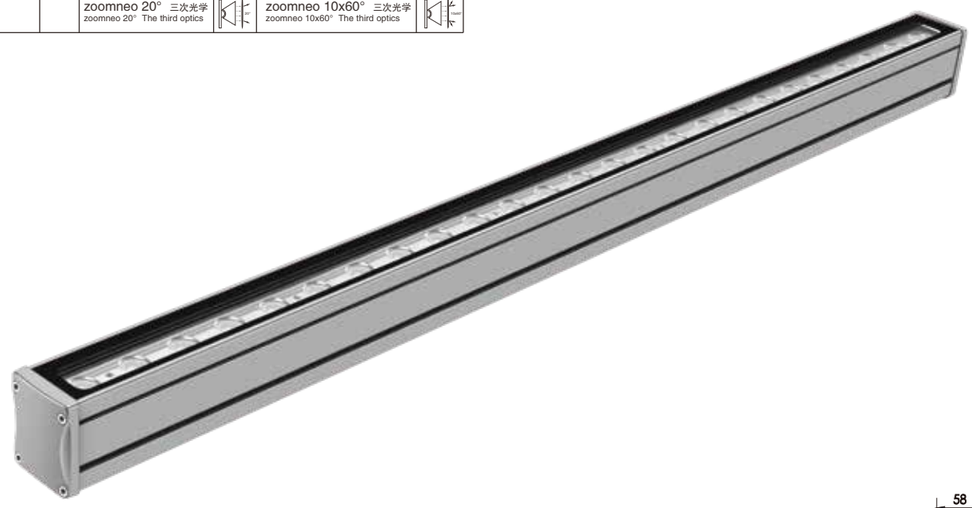

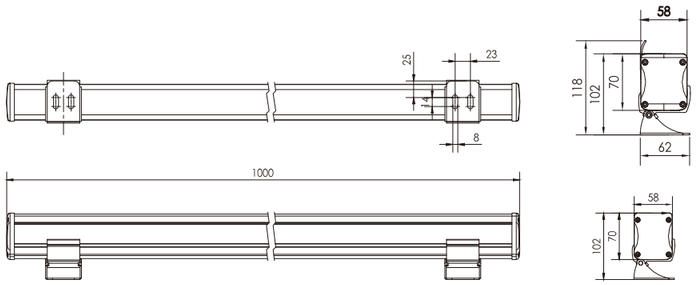

产品简介 Product Introduction


一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
四、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。

1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/Product Code	SL1305F–18	SL1305A–36	SL1305A–24	SL1305A–18	SL1305A–12	SL1305A–9(0.5m)
Led品牌/Led Brand	CREE RGBW 4 in 1	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/Led Quantity	18pcs	36pcs	24pcs	18pcs	12pcs	9pcs
额定功率/Rared Power	72W	42W	28W	22W	14W	11W
输入电压/Input Voltage	DC36V	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V
频率/Frequency Range	/	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGBW	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°				
控制方式/Control Mode	DMX512	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	3pcs	3/30(pcs)	5/46(pcs)	6/60(pcs)	10/94(pcs)	13/120(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1305 8°




SL1305 30°



SL1305 45°




SL1305 60°



平均光束角(50%):27.3度

SL1305 15X30°



平均光束角(50%):34.1度

SL1305 10X60°




Flood Light Series


SL1301


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

reddot winner 2021







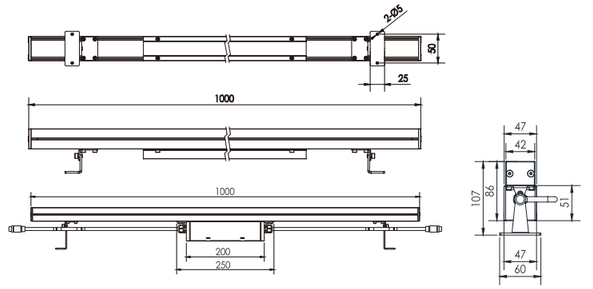

产品简介 Product Introduction

一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
四、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。


1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1301H–24	SL1301H–18	SL1301A–36	SL1301A–24	SL1301A–18	SL1301H–12(0.5)
Led品牌/ Led Brand	CREE/OSRAM RGBW 4IN1		LUMILEDS	LUMILEDS	LUMILEDS	CREE/OSRAM 4in1
Led数量/ Led Quantity	24pcs	18pcs	36pcs	24pcs	18pcs	12pcs
额定功率/ Rared Power	48W	36W	36W	24W	18W	24W
输入电压/ Input Voltage	DC24V	DC24V	DC24V/AC220	DC24V/AC220	DC24V/AC220	DC24V/AC220
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Rangle	20° 40° 60° 15X60° 15X25°		8° 12.5° 20° 30° 60° 15X30° 10X60°			20° 40° 60° 15X60°
控制方式/ Control Mode	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	5pcs	6pcs	6/60(pcs)	10/90(pcs)	12/120(pcs)	10/90(pcs)

产品型号/ Product Code	SL1301H–9(0.5)	SL1301H–6(0.3)	SL1301A–18(0.5)	SL1301A–12(0.5)	SL1301A–9(0.5)	SL1301A–8(0.3)
Led品牌/ Led Brand	CREE/OSRAM RGBW 4IN1		LUMILEDS	LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	9pcs	6pcs	18pcs	12pcs	9pcs	8pcs
额定功率/ Rared Power	18W	12W	18W	12W	9W	8W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Rangle	20° 40° 60° 15X60°		15° 20° 30° 60° 15X30° 10X60°			
控制方式/ Control Mode	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	12pcs	20pcs	12pcs	20pcs	26pcs	30pcs


配光曲线（半角）Distribution Curve Flux (SBC Case)




SL1301 12.5°




SL1301 20°



SL1301 30°



SL1301 60°




SL1301 10x60°




Flood Light Series

SL1302

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

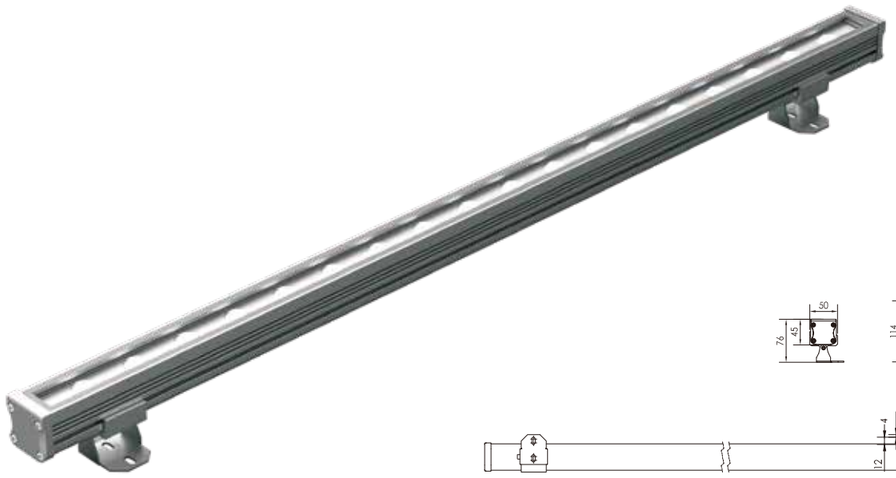

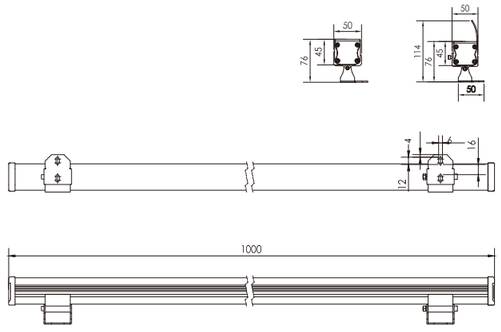

产品简介 Product Introduction


一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
四、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。

1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/Product Code	SL1302A–36	SL1302A–24	SL1302A–18	SL1302A–12	SL1302A–9(0.5m)	SL1302A–6(0.3m)
LED品牌/LED Brand	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
LED数量/LED Quantity	36pcs	24pcs	18pcs	12pcs	9pcs	6pcs
额定功率/Rated Power	40W	26W	20W	13W	10W	7W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15X30° 10X60°					
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series	3pcs	4pcs	6pcs	10pcs	14pcs	20pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1302 5°



SL1302 12.5°



SL1302 30°





SL1302 15x30°


Flood Light Series

SL1303

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

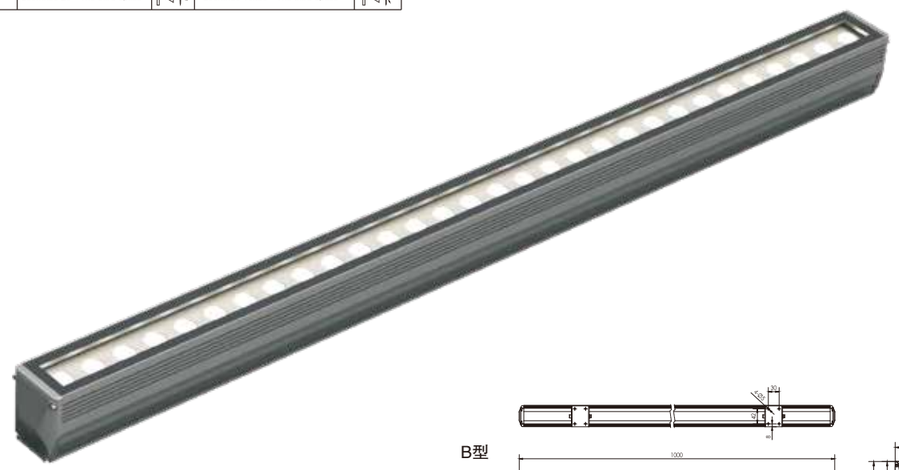

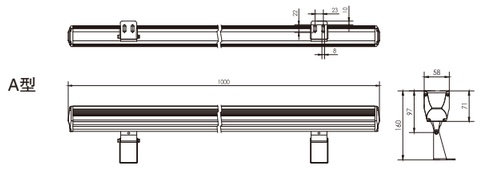

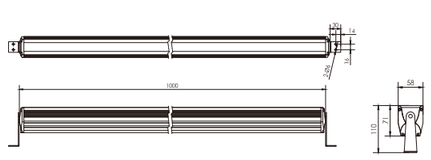

产品简介 Product Introduction


一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、可选择三种支架安装方式，满足多种场合的户外工程应用。
三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
五、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。

1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1303F-18	SL1303A-36	SL1303A-30	SL1303A-27	SL1303A-18	SL1303A-9(0.5m))
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	18pcs	36pcs	30pcs	27pcs	18pcs	9pcs
额定功率/ Rared Power	72W	42W	36W	32W	22W	11W
输入电压/ Input Voltage	DC36V	DC24V/AC100-240V	DC36V/AC100-240V	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/ Frequency Range	/	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Angle	20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°				
控制方式/ Control Mode	DMX512	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	3pcs	3/30(pcs)	6/36(pcs)	6/40(pcs)	6/60(pcs)	12/120(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1303 10x60°





SL1303 15x30°





SL1303 30°




Flood Light Series

SL1323

防眩遮光罩 Anti-glare shield		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



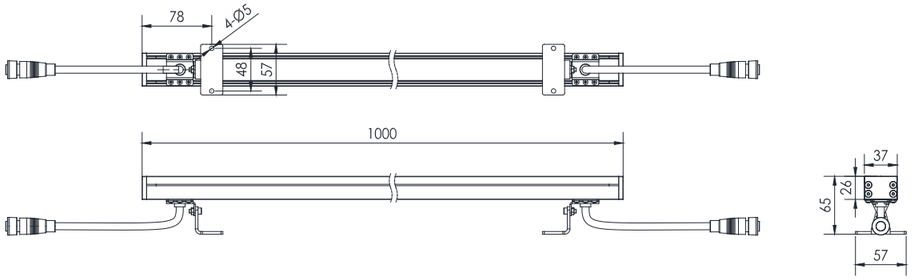


产品简介 Product Introduction


一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
四、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。

1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


配光曲线 (半角）Distribution Curve Flux (SBC Case)



SL1323 20°



SL1323 40°



SL1323 25x45°

技术参数 Specification


产品型号/ Product Code	SL1323A–24	SL1323A–18	SL1323A–12(0.5)	SL1323A–9(0.5)	SL1323A–6(0.3)
Led品牌/ Led Brand	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM
Led数量/ Led Quantity	24pcs	18pcs	12pcs	9pcs	6pcs
额定功率/ Rared Power	24W	18W	12W	9W	6W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/
颜色 / Color	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1
发光角度/ Beam Angle	20° 30° 45° 60° 25X45°				
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	6pcs	8pcs	12pcs	16pcs	24pcs

Flood Light Series

SL1322

防眩遮光罩 Anti-glare shield		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



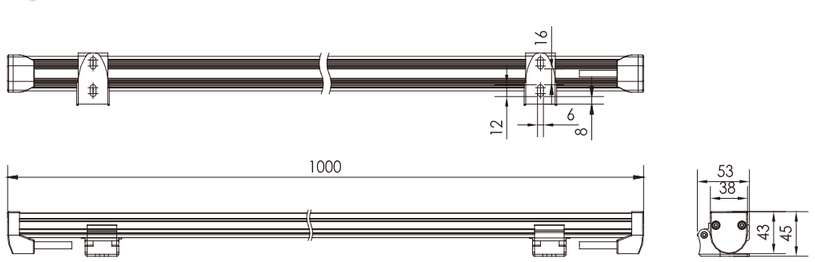


产品简介 Product Introduction


一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽 。
四、功能强大的DMX512接口采用高可靠总线式连接 ，均带有DMX 在线自动寻址功能。

1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1322 45°




SL1322 25x45°

技术参数 Specification


产品型号/ Product Code	SL1322A-24	SL1322A-18	SL1322A-12(0.5)	SL1322A-9(0.5)	SL1322A-6(0.3)
Led品牌/ Led Brand	OSRAM RGBW 4IN1	OSRAM RGBW 4IN1	OSRAM RGBW 4IN1	OSRAM RGBW 4IN1	OSRAM RGBW 4IN1
Led数量/ Led Quantity	24pcs	18pcs	12pcs	9pcs	6pcs
额定功率/ Rared Power	24W	18W	12W	9W	6W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/
颜色 / Color	RGBW	RGBW	RGBW	RGBW	RGBW
发光角度/ Beam Angle	20° 30° 45° 60° 25X45°				
控制方式/ Control Mode	DMX512	DMX512	DMX512	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	6pcs	8pcs	12pcs	16pcs	24pcs

接线示意图 Wiring Diagram


RGB A 型

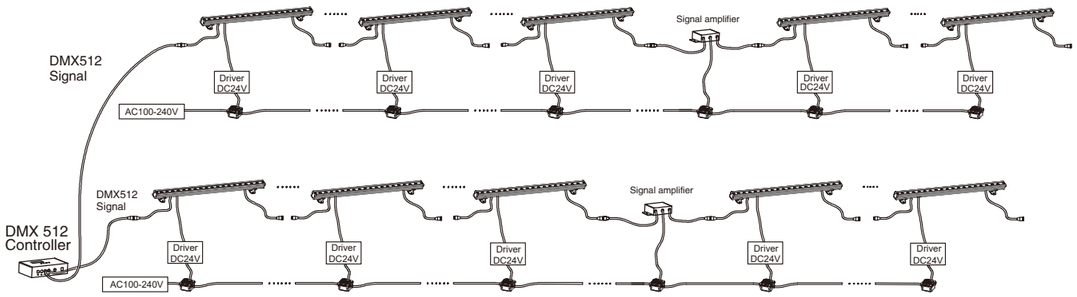

RGB B 型

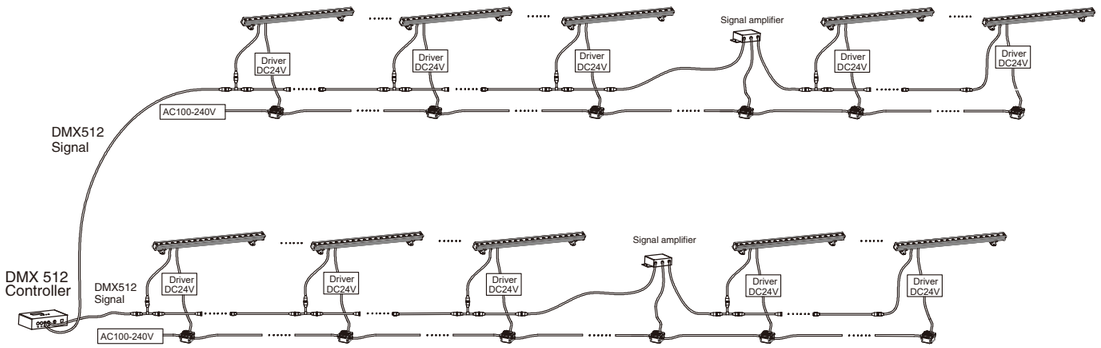


单色 (Single Color)

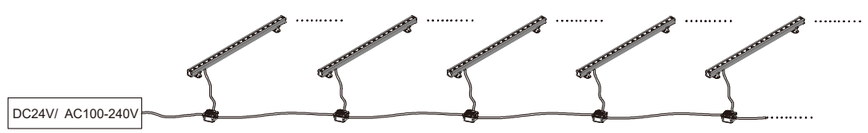

Flood Light Series

SL1321

防眩遮光罩 Anti-glare shield		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

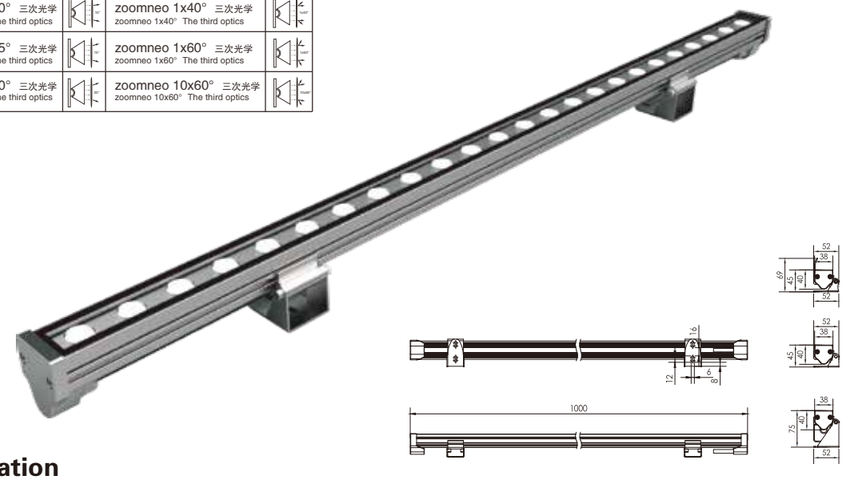


技术参数 Specification


产品型号/Product Code	SL1321A–36	SL1321A–24	SL1321A–18	SL1321A–12	SL1321A–12(0.5m)	SL1321A–9(0.5m)
LED品牌 LED Brand	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE
LED数量 LED Quantity	36pcs	24pcs	18pcs	12pcs	12pcs	9pcs
额定功率 Rated Power	36W	24W	18W	12W	12W	9W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/	/
颜色 Color	Single	Single	Single	Single	Single	Single
发光角度 Beam Angle	20 ° 30° 55° 25X45°					
控制方式 Control Mode	CC	CC	CC	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度 Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

产品型号/ Product Code	SL1321A–6(0.3m)	
LED品牌/ LED Brand	LUMILEDS/CREE	
LED数量/ LED Quantity	6pcs	
额定功率/ Rared Power	6W	
输入电压/ Input Voltage	DC24V	
频率/ Frequency Range	/	
颜色 / Color	Single	
发光角度/ Beam Angle	12° 30° 55° 25X45°	
控制方式/ Control Mode	CC	
使用寿命/ Life	50000H	
防护等级/ Protection Grade	IP66	
环境温度/ Ambient Temperature	–25℃∽50℃	
环境湿度/ Ambient Humidity	10%∽90%	


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1321 20°



SL1321 30°



SL1321 60°




SL1321 25X45°



Flood Light Series

SL1351A



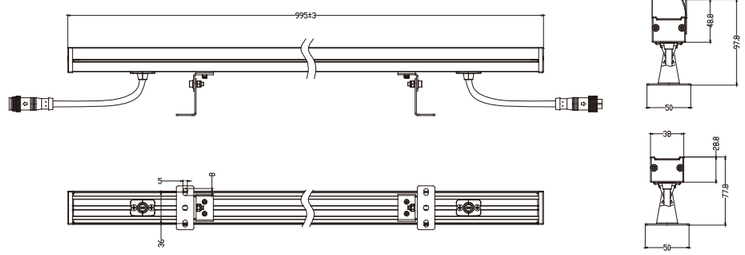


技术参数 Specification

产品型号/Product Code	SL1351AB-36	SL1351AA-36	SL1351AB-18(0.5m)	SL1351AA-18(0.5)	SL1351AB-9 (0.3m)	SL1351AA-9 (0.3m)
LED品牌 LED Brand	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835
LED数量 LED Quantity	36pcs	36pcs	18pcs	18pcs	9pcs	9pcs
额定功率 Rated Power	48W	36W	24W	18W	15W	12W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/	/
颜色 Color	Single	Single	Single	Single	Single	Single
发光角度 Beam Angle	20° 30° 40° 60° 20X40° 18X50°					
控制方式 Control Mode	CC	CC	CC	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

Flood Light Series
SL1351B



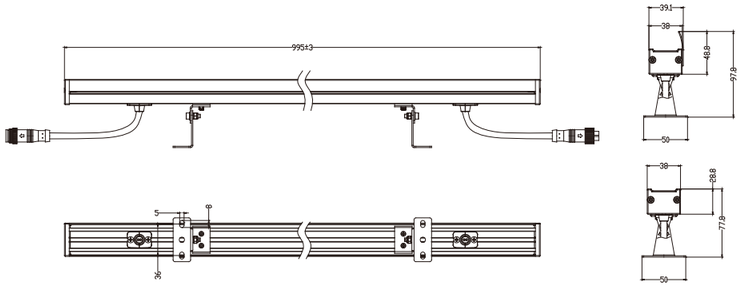


技术参数 Specification

产品型号/Product Code	SL1351BB-24	SL1351BB-18	SL1351BB-12(0.5m)	SL1351BB-9(0.5m)	SL1351BB-6(0.3m)	
LED品牌 LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	
LED数量 LED Quantity	24pcs	18pcs	12pcs	9pcs	6pcs	
额定功率 Rated Power	48W	36W	24W	18W	12W	
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	
频率 Frequency Range	/	/	/	/	/	
颜色 Color	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	
发光角度 Beam Angle	15° 20° 30° 45° 60° 25X45°					
控制方式 Control Mode	DMX512	DMX512	DMX512	DMX512	DMX512	
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	
环境温度 Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度 Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	

Flood Light Series
SL1352A



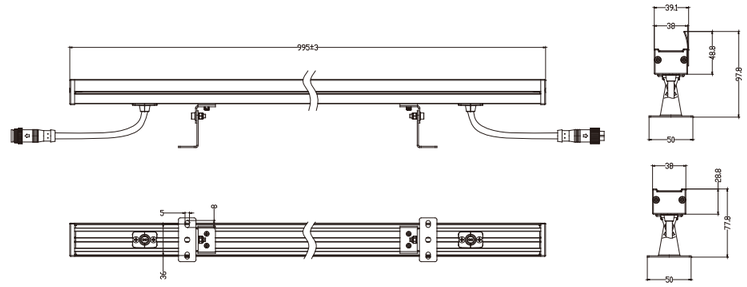


技术参数 Specification

产品型号/Product Code	SL1352AA-24	SL1352AA-18	SL1352AA-12(0.5m)	SL1352AA-12(0.5m)	SL1352AB-6(0.3m)	
LED品牌 LED Brand	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	
LED数量 LED Quantity	24pcs	18pcs	12pcs	9pcs	6pcs	
额定功率 Rated Power	24W	18W	12W	9W	6W	
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	
频率 Frequency Range	/	/	/	/	/	
颜色 Color	Single	Single	Single	Single	Single	
发光角度 Beam Angle	20° 30° 40° 60° 20X40° 18X50°					
控制方式 Control Mode	CC	CC	CC	CC	CC	
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	
环境温度 Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度 Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	

Flood Light Series

SL1352B




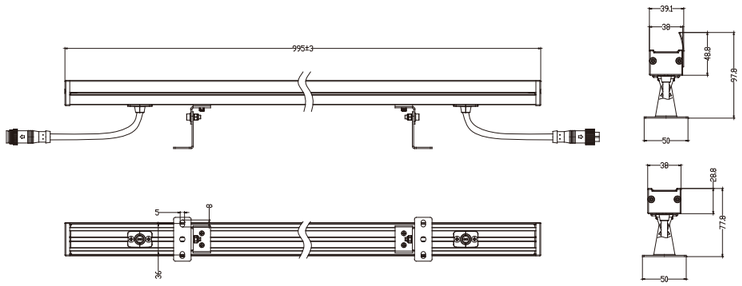


技术参数 Specification

产品型号/Product Code	SL1352BB–18	SL1352BB–12	SL1352BB–9(0.5m)	SL1352BB–6(0.5m)	SL1352BB–6(0.3m)	
LED品牌 LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	
LED数量 LED Quantity	18pcs	12pcs	18pcs	6pcs	6pcs	
额定功率 Rated Power	24W	18W	12W	9W	8W	
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	
频率 Frequency Range	/	/	/	/	/	
颜色 Color	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	
发光角度 Beam Angle	20° 30° 45° 60° 25X45°					
控制方式 Control Mode	DMX512	DMX512	DMX512	DMX512	DMX512	
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	
环境温度 Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	
环境湿度 Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1351AA–36 12D



SL1352AA–24 20D




Flood Light Series


SL1130F


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




















产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。

二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。

三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。

四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.

2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.

3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.

4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1130FM–19	SL1130FM–36	SL1130FE–36	SL1130FL–36
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE/OSRAM	OSRAM
Led数量/ Led Quantity	19pcs	36pcs	36pcs	36pcs
额定功率/ Rared Power	190W	300W	360W	360W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBW
发光角度/ Beam Angle	1.5°	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DMX512/RDM	CC/DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	5pcs	3pcs	3pcs	3pcs

产品型号/ Product Code	SL1130FN–36	SL1130FF–36	SL1130FC–144	
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4in1	CREE	
Led数量/ Led Quantity	36pcs	36pcs	144pcs	
额定功率/ Rared Power	300W	360W	360W	
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBWCLA	RGBW	Single/RGBW	
发光角度/ Beam Angle	10° 15° 20° 30° 15X60°	8° 15° 20° 30° 15X60°	8° 12.5° 30° 10X60°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DMX512/RDM	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	
串联数量/ In series(max)	3pcs	3pcs	3pcs	


Flood Light Series


SL1131F


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




















产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。

二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。

三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。

四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.

2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.

3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.

4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1131FM–12	SL1131FM–24	SL1131FE–24	SL1131FL–24
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE/OSRAM	OSRAM
Led数量/ Led Quantity	12pcs	24pcs	24pcs	24pcs
额定功率/ Rared Power	120W	200W	240W	240W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/ 6500K/Pc Amber/RGBW	2700K/3000K/4000K/ 6500K/Pc Amber/RGBW	Single	RGBW
发光角度/ Beam Angle	1.5°	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	10pcs	8pcs	5pcs	5pcs


产品型号/ Product Code	SL1131FN–24	SL1131FF–24	SL1131FC–96	
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4in1	CREE	
Led数量/ Led Quantity	24pcs	24pcs	96pcs	
额定功率/ Rared Power	200W	240W	240W	
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBWCLA	RGBW	Single/RGBW	
发光角度/ Beam Angle	10° 15° 20° 30° 15X60°	8° 15° 20° 30° 15X60°	5° 8° 12.5° 30° 10X60°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DMX512/RDM	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	
串联数量/ In series(max)	5pcs	5pcs	5pcs	


Flood Light Series


SL1132F


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	















SL1132M











SL1132Z



SL1132U

产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1132FM-7	SL1132FM-25	SL1132FE-25	SL1132FD-25
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE XP-L	CREE XP-G3
Led数量/ Led Quantity	7pcs	25pcs	25pcs	25pcs
额定功率/ Rared Power	70W	120W	120W	85W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	Single
发光角度/ Beam Angle	1.5°	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20	
控制方式/ Control Mode	CC/DALI/0-10V	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
产品型号/ Product Code	SL1132FN-24	SL1132FF-24	SL1132FC-72	
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4 in1	CREE XP-E2	
Led数量/ Led Quantity	24pcs	24pcs	72pcs	
额定功率/ Rared Power	150W	150W/200W	150W	
输入电压/ Input Voltage	AC100-305V	DC36V / AC100-305V	DC36V / AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBWCLA	RGBW	RGB/RBGW	
发光角度/ Beam Angle	15° 20° 30° 40° 15X60°	15° 20° 30° 40° 15X60°	8° 12.5° 30° 10X60°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	DMX512/RDM	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1132 6°




SL1132 15°




SL1132 30°



SL1132 60°



SL1132 15x60°




SL1132 10x70°

Flood Light Series

SL1135F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



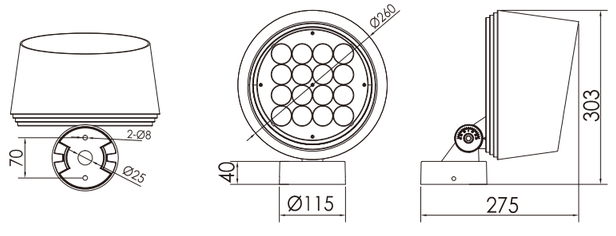





SL1135U




SL1135M

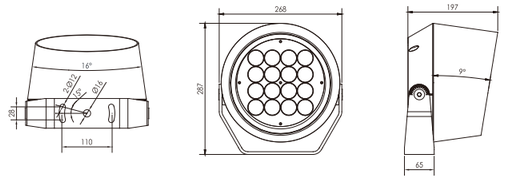





SL1135Z

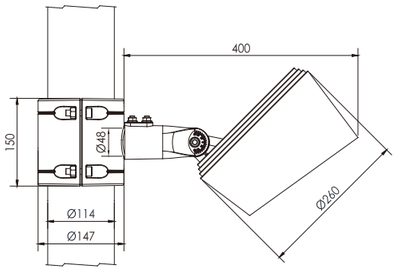





SL1135L



SL1135H





适配杆径(67–325)mm T≥4
AVL Dia of pole(67–325)mm T≥4

适配树杆尺寸(168–268)mm
AVL Dia of pole(168–268)mm

产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design,could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1135FM–4	SL1135FM–16	SL1135FE–16	SL1135FD–16
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE XP–L	CREE XP–G3
Led数量/ Led Quantity	4pcs	16pcs	16pcs	16pcs
额定功率/ Rared Power	40W	75W	75W	60W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	Single
发光角度/ Beam Angle	1.5°	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20°	
控制方式/ Control Mode	CC/DALI/0–10V	CC/DMX512/RDM	CC/DALI/0–10V	CC/DALI/0–10V
使用寿命/ Life	50000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	24pcs	16pcs	16pcs	22pcs
产品型号/ Product Code	SL1135FN–16	SL1135FF–16	SL1135FC–48	
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4 in1	CREE XP–E2	
Led数量/ Led Quantity	16pcs	16pcs	48pcs	
额定功率/ Rared Power	100W	100W	100W	
输入电压/ Input Voltage	AC100–305V	DC36V / AC100–305V	DC36V / AC100–305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBWCLA	RGBW	RGB/RGBW	
发光角度/ Beam Angle	15° 20° 30° 15X60°	15° 20° 30° 15X60°	5° 8° 12.5° 30° 10X60°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	DMX512/RDM	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	
串联数量/ In series(max)	12pcs	2/12(pcs)	2/12(pcs)	


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1135 3.5°




SL1135 20°




SL1135 30°



SL1135 40°




SL1135 45°



SL1135 60°




SL1135M–26–06–04

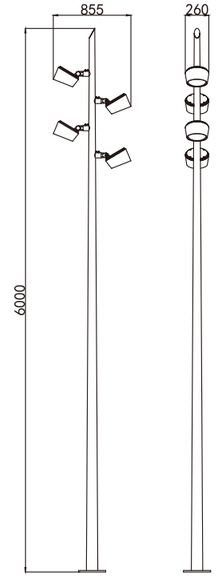






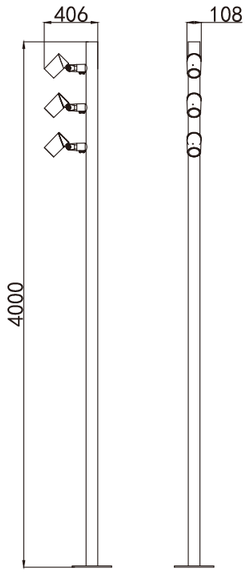


SL1140M–26–04–03



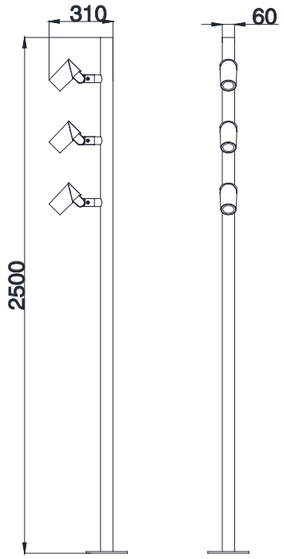


SL1145M–26–02–03



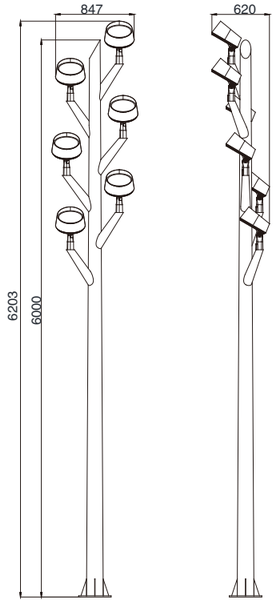

SL1132F–26–06–06



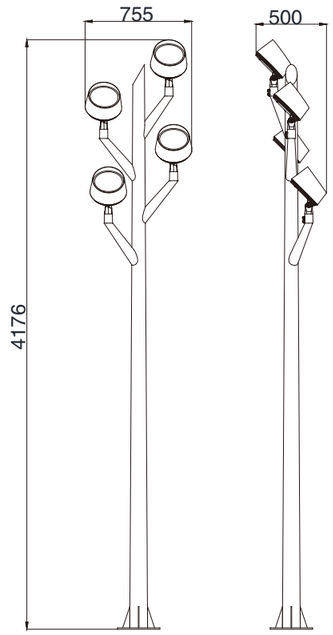

SL1135F–26–04–04

Flood Light Series


SL1136F

圆孔格栅 Round–meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti–glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





SL1136S

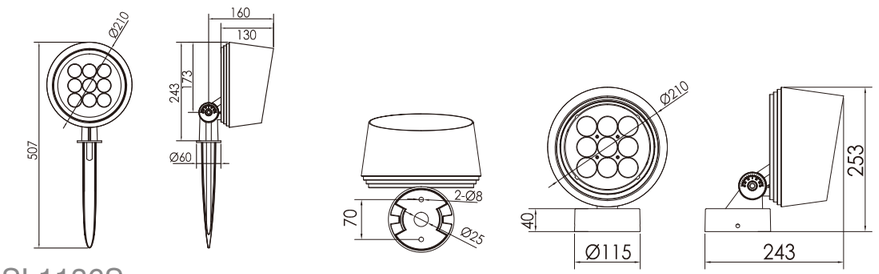





SL1136U




SL1136M

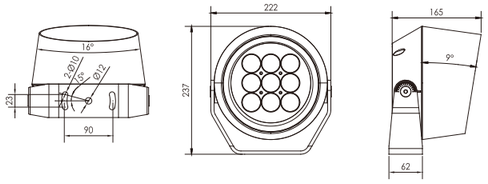





SL1136Z

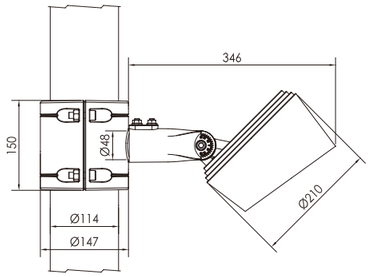





SL1136L



SL1136H





适配杆径(67–325)mm T≥4

AVL Dia of pole(67–325)mm T≥4

适配树杆尺寸(168–268)mm


AVL Dia of pole(168–268)mm

技术参数 Specification


产品型号/ Product Code	SL1136FM–3	SL1136FM–9	SL1136FE–9	SL1136FD–9
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE XP–L	CREE XP–G3
Led数量/ Led Quantity	3pcs	9pcs	9pcs	9pcs
额定功率/ Rared Power	30W	45W	45W	35W
输入电压/ Input Voltage	AC100–264V	AC100–264V	AC100–264V	AC100–264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000k 6500K/Pc Amber	2700K/3000K/4000k 6500K/Pc Amber/RGBW	Single	Single
发光角度/ Beam Angle	1.5°	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20°	
控制方式/ Control Mode	CC/DALI/0–10V	CC/DMX512/RDM	CC/DALI/0–10V	CC/DALI/0–10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	36pcs	28pcs	28pcs	36pcs

产品型号/ Product Code	SL1136FN–9	SL1136FF–9	SL1136FC–30	
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4 in1	CREE XP–E2	
Led数量/ Led Quantity	9pcs	9pcs	30pcs	
额定功率/ Rared Power	60W	60W	60W	
输入电压/ Input Voltage	DC36V / AC100–305V	DC36V / AC100–305V		
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBWCLA	RGBW	RGB	
发光角度/ Beam Angle	15° 20° 30° 15X60°	15° 20° 30° 15X60°	5° 8° 12.5° 30° 10X60°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	DMX512/RDM	
使用寿命/ Life	50000H	50000H	50000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	
串联数量/ In series(max)	28pcs	28pcs	28pcs	


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1136 6°




SL1136 12°




SL1136 20°



SL1136 30°



SL1136 60°



SL1136 10x70°

SL1130/SL1131/SL1132/SL1135 /SL1136 /SL1137/SL1139



Flood Light Series


SL1137F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





SL1137S

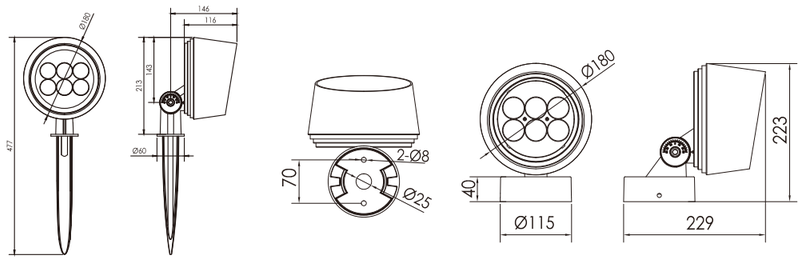






SL1137U




SL1137M












SL1137Z

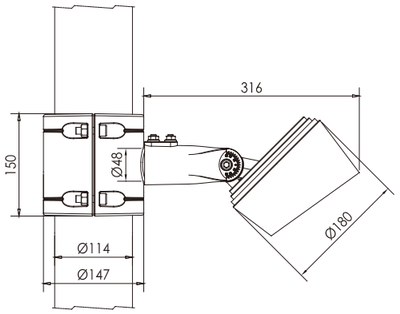




SL1137L




SL1137H



适配杆径(67–325)mm T≥4

AVL Dia of pole(67–325)mm T≥4




适配树杆尺寸(168–268)MM

AVL Dia of pole(168–268)mm


技术参数 Specification

产品型号/ Product Code	SL1137FE–6	SL1137FE–6	SL1137FD–6	SL1137FF–6	SL1137FC–18
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	CREE XP–E
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs	18pcs
额定功率/ Rared Power	30W	30W	22W	30W	36W
输入电压/ Input Voltage	AC100–DC264V	AC100–264V	DC24V/AC100–264V		DC24V/AC100–264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	8° 12.5° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44pcs	44pcs	60pcs	4/44(pcs)	4/36(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1137 8°



SL1137 12°



SL1137 15°



SL1137 30°

Flood Light Series


SL1139F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





SL1139S

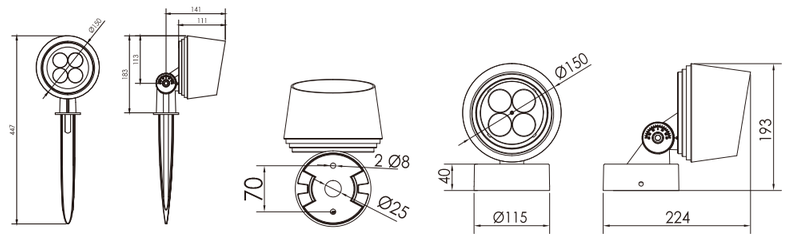





SL1139U




SL1139M

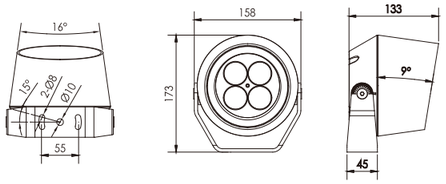





SL1139Z

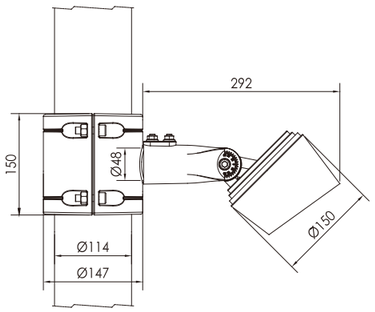





SL1139L



SL1139H





适配杆径(67–325)mm T≥4

AVL Dia of pole(67–325)mm T≥4


适配树杆尺寸(168–268)mm

AVL Dia of pole(168–268)mm


技术参数 Specification

产品型号/ Product Code	SL1139FM–1	SL1139FM–4	SL1139FE–4	SL1139FD–4	SL1139FF–4
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE XP–L	CREE XP–G3	CREE RGBW 4 in1
Led数量/ Led Quantity	1pcs	4pcs	4pcs	4pcs	4pcs
额定功率/ Rared Power	10W	20W	20W	15W	20W
输入电压/ Input Voltage	AC100–264V	AC100–264V	AC100–264V	AC100–264V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K/Pc Amber		Single	Single	RGBW
发光角度/ Beam Angle	1.5°	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	88pcs	66pcs	66pcs	88pcs	7pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1139 12.5°




SL1139 20°



SL1139 22.5°



SL1139 30°



SL1139 60°



055 SHYLON

Flood Light Series


SL1150F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	






SL1150S

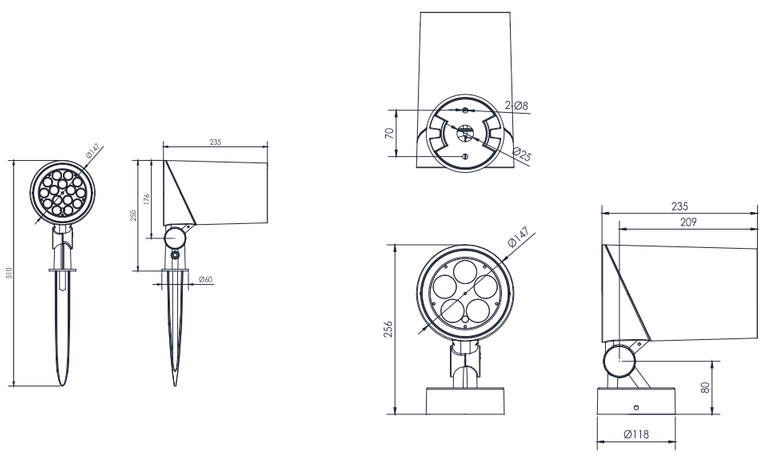




SL1150U

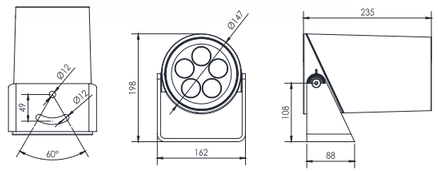




SL1150M

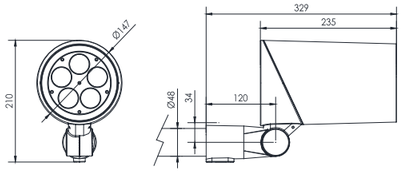




SL1150Z

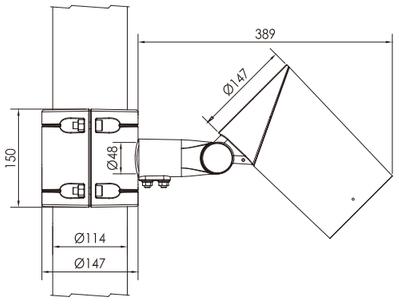




SL1150L



适配杆径(67–325)mm T≥4
AVL Dia of pole(67–325)mm T≥4



SL1150H



适配树杆尺寸(168–268)mm
AVL Dia of pole(168–268)mm


产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1150FM–5	SL1150FI–5	SL1150FD–15	SL1150FF–5	SL1150F–C50
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE XHP35	CREE XP–G3	CREE RGBW 4 in1	CREE COB
Led数量/ Led Quantity	5pcs	5pcs	15pcs	5pcs	1pcs
额定功率/ Rared Power	45W	45W	50W	50W	50W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	DC24V / AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	12° 24° 38°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	28pcs	28pcs	26pcs	2/26pcs	26pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1150 6°




SL1150 12°




SL1150 20°



SL1150 30°



SL1150 45°



SL1150 60°



059 SHYLON

Flood Light Series


SL1140F

圆孔格栅 Round–meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti–glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





SL1140S

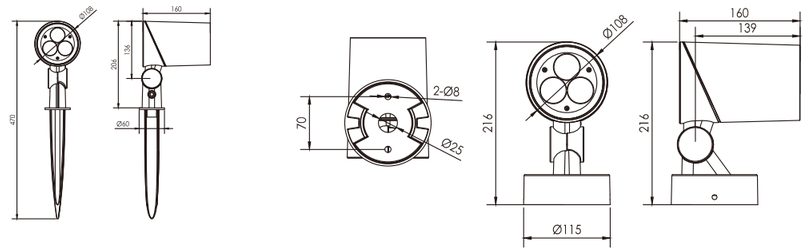





SL1140U




SL1140M

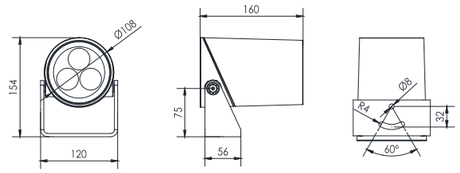

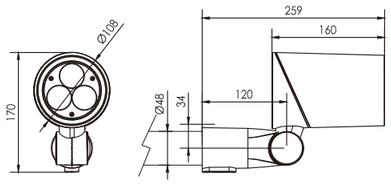



SL1140Z

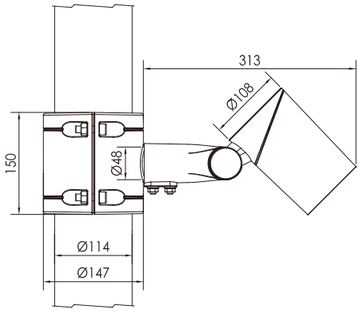




SL1140L




SL1140H



适配杆径(67–325)mm T≥4

AVL Dia of pole(67–325)mm T≥4



适配树杆尺寸(168–268)mm


AVL Dia of pole(168–268)mm

技术参数 Specification


产品型号/Product Code	SL1140FM–1	SL1140FM–3	SL1140FI–3	SL1140FE–3	SL1140FD–3
LED品牌 LED Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE XHP35	CREE XP–L	CREE XP–G3
LED数量 LED Quantity	1pcs	3pcs	3pcs	3pcs	3pcs
额定功率 Rated Power	10W	30W	30W	15W	12W
输入电压 Input Voltage	AC100–264V	AC100–264V	AC100–264V	AC100–264V	AC100–264V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 Color	2700K/3000K/4000K 6500K/Pc Amber	2700K/3000K/4000K 6500K/Pc Amber	Single	Single	Single
发光角度 Beam Angle	1.5°	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°		
控制方式 Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	DMX512
使用寿命 Life	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%°	10% ~ 90%°	10% ~ 90%
串联数量/ In series(max)	110pcs	88pcs	44pcs	88pcs	110pcs

产品型号/ Product Code	SL1140FG–1	SL1140FF–3	SL1140F–C15	SL1140F–C20
Led品牌/ Led Brand	OSRAM	CREE RGBW 4 in 1	CREE COB	CREE COB
Led数量/ Led Quantity	1pc	3pcs	1pcs	1pcs
额定功率/ Rared Power	15W/30W	12W	15W	20W
输入电压/ Input Voltage	DC12V/DC24V	DC24V	AC100–264V	AC100–264V
频率/ Frequency Range	/	/	50/60Hz	50/60Hz
颜色 / Color	RGBW	RGBW	Single	Single
发光角度/ Beam Angle	5° 20°	15° 20° 30° 15x60°	12° 24° 38° 45° 60°	
控制方式/ Control Mode	DMX512	DMX512	CC/DALI/0–10V	CC/DALI/0–10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	–25℃⌒50℃	–25℃⌒50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10%⌒90%	10%⌒90%
串联数量/ In series(max)	4/9(pcs)	12pcs	88pcs	66pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1140 6°




SL1140 12°



SL1140 20°



SL1140 30°



SL1140 60°




063 SHYLON

Flood Light Series

SL1145F


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




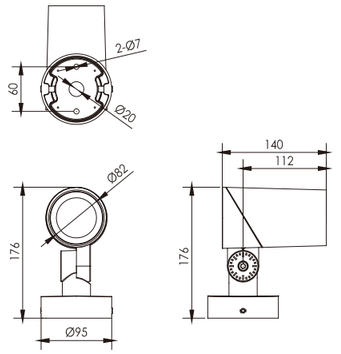



SL1145U




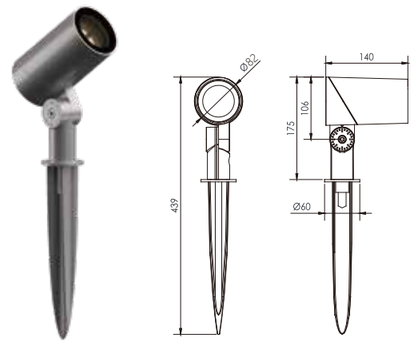

SL1145S


技术参数 Specification

产品型号/ Product Code	SL1145FM–1	SL1145FE–1	SL1145FF–1	SL1145F–C12
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE XHP35	CREE RGBW 4 in 1	CREE COB
Led数量/ Led Quantity	1pc	1pc	1pc	1pc
额定功率/ Rared Power	10W	10W	8W	12W
输入电压/ Input Voltage	AC100–264V	AC100–264V	DC12V/DC24V	AC100–264V
频率/ Frequency Range	50/60Hz	50/60Hz	/	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K//Pc Amber	Single	RGBW	Single
发光角度/ Beam Rangle	2.5°	3° 15° 20° 10X60°	8° 25° 10X45°	12° 24° 38°
控制方式/ Control Mode	CC	CC	DMX512	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	130pcs	130pcs	9/18(pcs)	110(pcs)



SL1145 38°






SL1145 60°




配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1145 3°






SL1145 12°






SL1145 15°





SL1145 24°



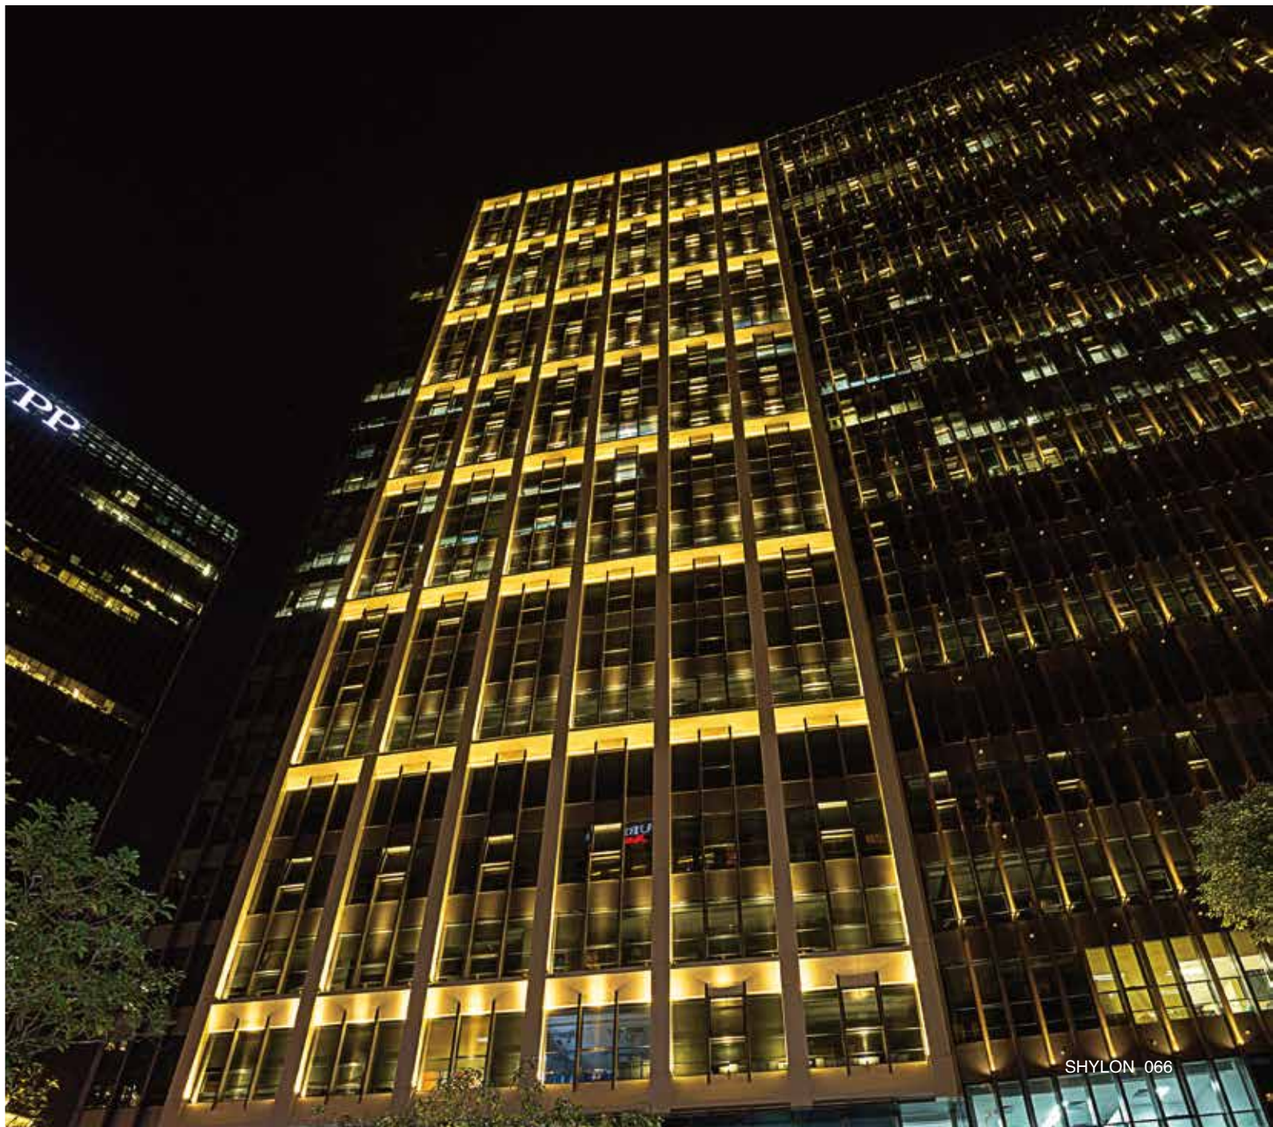


Flood Light Series

SL1146F


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




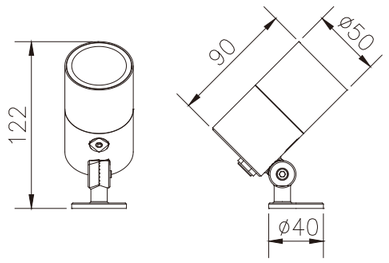




SL1146C

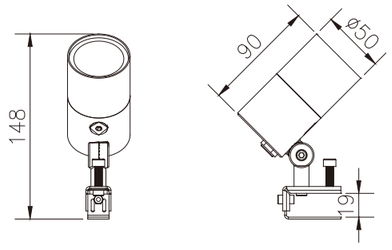


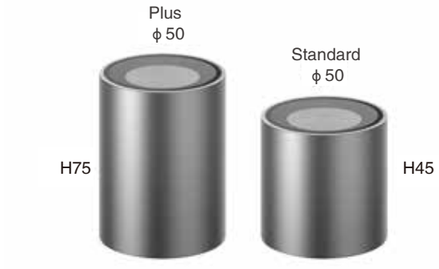

两种长度可选
Optional

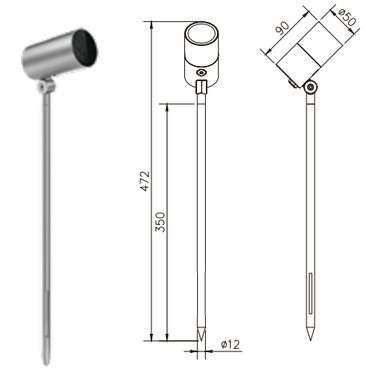

SL1146S

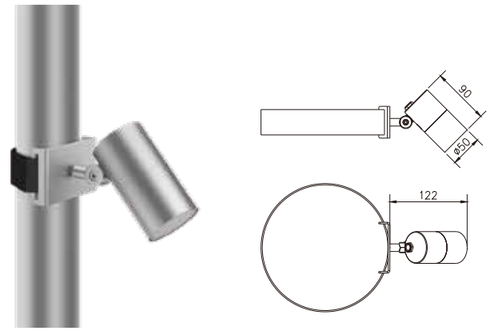

SL1146H

产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1146FM-1	SL1146FE-1	SL1146UF-1
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE XP-L	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rared Power	10W	10W	10W
输入电压/ Input Voltage	AC100-264V/DC12V	AC100-264V/DC12V	DC12V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	2700K/3000K/4000K/6500K/Pc Amber	Single	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 10X70° 5X20°	15° 20° 30° 10X30° 10X60°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	120pcs/12pcs	64pcs	64pcs

Flood Light Series

SL1147F


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



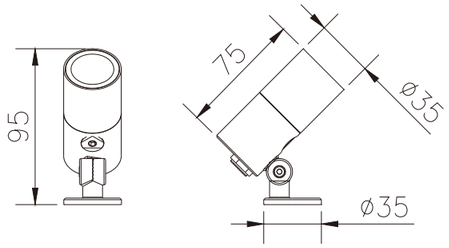




SL1147C

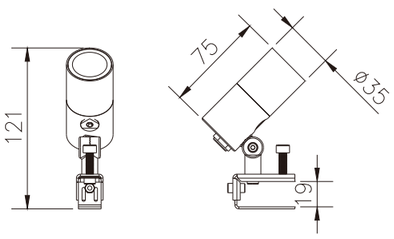



两种长度可选
Optional




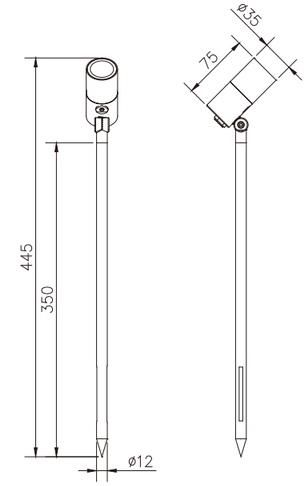

SL1147S



SL1147H



产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1147FE–1	SL1147FF–1
Led品牌/ Led Brand	OSRAM	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs
额定功率/ Rared Power	6W	6W
输入电压/ Input Voltage	AC100–264V/DC12V	DC12V
频率/ Frequency Range	50/60Hz	/
颜色 / Color	Single	RGBW
发光角度/ Beam Angle	8° 12.5° 20° 30° 60° 15X30° 10X60°	20° 40° 60° 15X60° 15X25°
控制方式/ Control Mode	CC	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%
串联数量/ In series(max)	120pcs/12pcs	64pcs

Flood Light Series

SL1148F


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



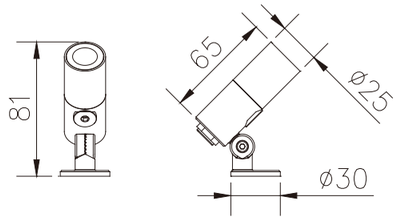




SL1148C

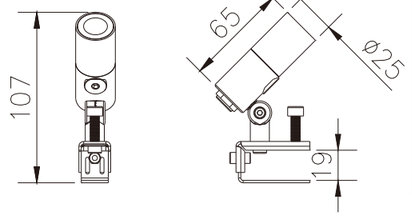




两种长度可选
Optional

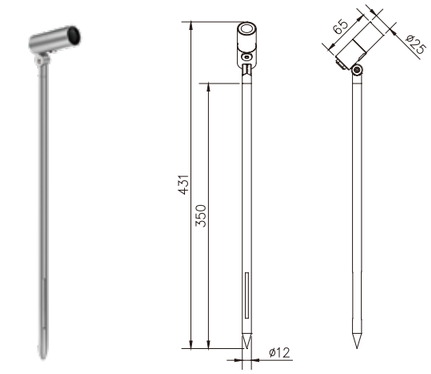

SL1148S

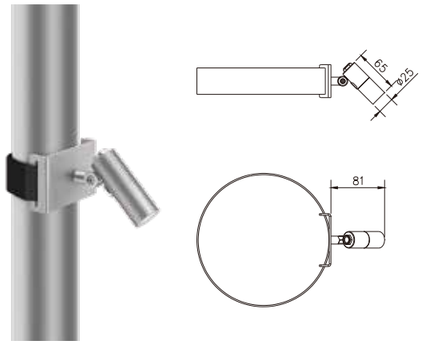

SL1148H

产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1148FE–1	
Led品牌/ Led Brand	OSRAM	
Led数量/ Led Quantity	1pcs	
额定功率/ Rared Power	3W	
输入电压/ Input Voltage	DC12V/DC24V	
频率/ Frequency Range	50/60Hz	
颜色 / Color	Single	
发光角度/ Beam Angle	20° 30° 45° 60° 25X45°	
控制方式/ Control Mode	CC	
使用寿命/ Life	50000H	
防护等级/ Protection Grade	IP66	
环境温度/ Ambient Temperature	–25℃∽50℃	
环境湿度/ Ambient Humidity	10%∽90%	
串联数量/ In series(max)	220pcs/22pcs	

Flood Light Series

SL1102U


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	








SL1102S











SL1102G





产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1102UD–36	SL1102UC–36	SL1102UB–36	SL1102UC–24
Led品牌/ Led Brand	CREE XP–G3	CREE	CREE	CREE
Led数量/ Led Quantity	36pcs	36pcs	36pcs	24pcs
额定功率/ Rared Power	105W	86W	60W	50W
输入电压/ Input Voltage	AC100–240V	DC24V/AC100–240V		DC36V/AC100–240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			
控制方式/ Control Mode	CC	CC/DALI/0–10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	12pcs	1/15(pcs)	2/22(pcs)	4/26(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1102 8°




SL1102 12.5°




SL1102 20°




SL1102 40°



SL1102 45°



SL1102 60°



SL1102 15x30°


Flood Light Series

SL1102F

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	













SL1102X














产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1102FD–36	SL1102FC–36	SL1102FB–36	SL1102FC–24
Led品牌/ Led Brand	CREE	CREE	CREE	CREE
Led数量/ Led Quantity	36pcs	36pcs	36pcs	24pcs
额定功率/ Rared Power	105W	86W	60W	50W
输入电压/ Input Voltage	AC100–240V	AC100–240V		AC100–240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			
控制方式/ Control Mode	CC	CC	CC	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	12pcs	15pcs	22pcs	26pcs





Flood Light Series

SL1103U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti–glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
		zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
		zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
		zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
		zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics











SL1103G










SL1103S



产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification


产品型号/Product Code	SL1103UC–18	SL1103UB–18	SL1103UA–18
LED品牌 LED Brand	CREE XP–G3	CREE	CREE
LED数量 LED Quantity	18pcs	18pcs	18pcs
额定功率 Rated Power	45W	30W	21W
输入电压 Input Voltage	AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	RGB/Single	RGB/Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°		
控制方式 Control Mode	CC	DMX512/CC	DMX512/CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%
串联数量/ In series(max)	28pcs	4/44(pcs)	7/60(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1103 8°


SL1103 20°


SL1103 30°


SL1103 45°


SL1103 10x60°


SL1103 15x30°

Flood Light Series


SL1103F


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	






SL1103M










SL1103X














技术参数 Specification

产品型号/Product Code	SL1103FC–18	SL1103FB–18	SL1103FA–18
LED品牌 LED Brand	CREE XP–G3	CREE	CREE
LED数量 LED Quantity	18pcs	18pcs	18pcs
额定功率 Rated Power	45W	30W	21W
输入电压 Input Voltage	AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	RGB/Single	RGB/Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°		
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%
串联数量/ In series(max)	28pcs	4/44pcs	7/60pcs





Flood Light Series


SL1104U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	













SL1104G










SL1104S



产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/Product Code	SL1104UB–9	SL1104UA–9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	20W	11W
输入电压/Input Voltage	DC12V/AC100–240V	DC12V/AC100–240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/66(pcs)	6/120(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1104 8°




SL1104 12.5°




SL1104 15°




SL1104 20°




SL1104 30°



SL1104 45°



SL1104 60°



SL1104 10x60°

Flood Light Series


SL1104F

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	






SL1104M






SL1104X

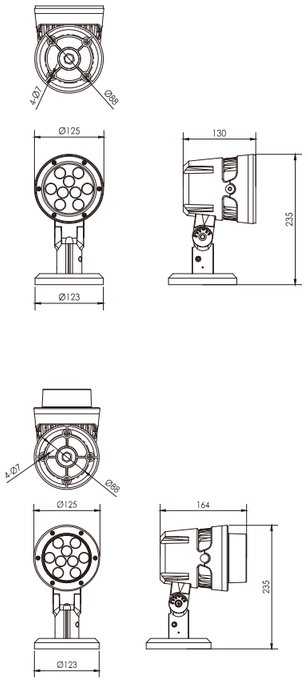


技术参数 Specification

产品型号/Product Code	SL1104FB–9	SL1104FA–9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	20W	11W
输入电压/Input Voltage	AC100–240V	AC100–240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	Single	Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°	
控制方式/Control Mode	CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	61pcs	110pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1104 8°



SL1104 12.5°




Flood Light Series

SL1105U


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



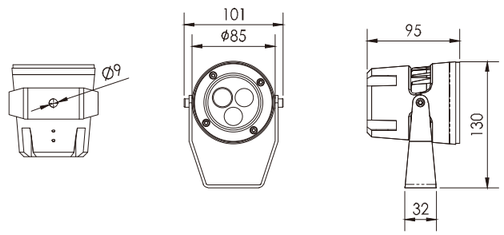



SL1105S



产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号Product Code	SL1105UC–3	SL1105UB–3	SL1105UA–3	SL1105U–C10
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	3pcs	1pc
额定功率Rated Power	8W	6W	3.5W	10W
输入电压Input Voltage	DC12V/AC100–240V	DC12V/AC100–240V	DC12V/AC100–240V	DC12V/AC100–240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single	RGB/Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			25°
控制方式Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1105 20°




SL1105 30°

Flood Light Series

SL1105F

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti–glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



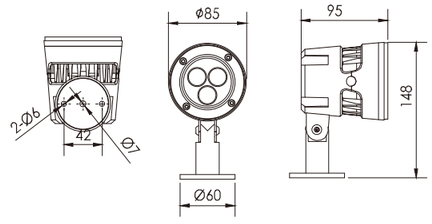

产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号Product Code	SL1105FC–3	SL1105FB–3	SL1105FA–3	SL1105F–C10
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	3pcs	1pc
额定功率Rated Power	8W	6W	3.5W	10W
输入电压Input Voltage	AC100–240V	AC100–240V	AC100–240V	AC100–240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			25°
控制方式Control Mode	CC	CC	CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1105 12.5°




SL1105 60°




接线示意图 Wiring Diagram

RGB A 型

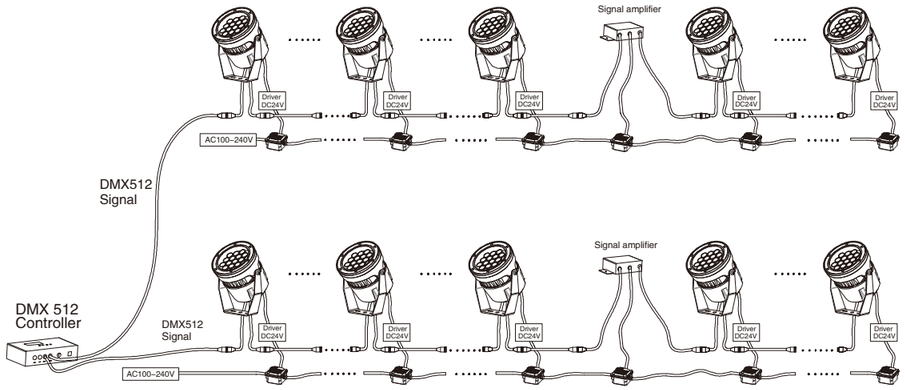

RGB B 型

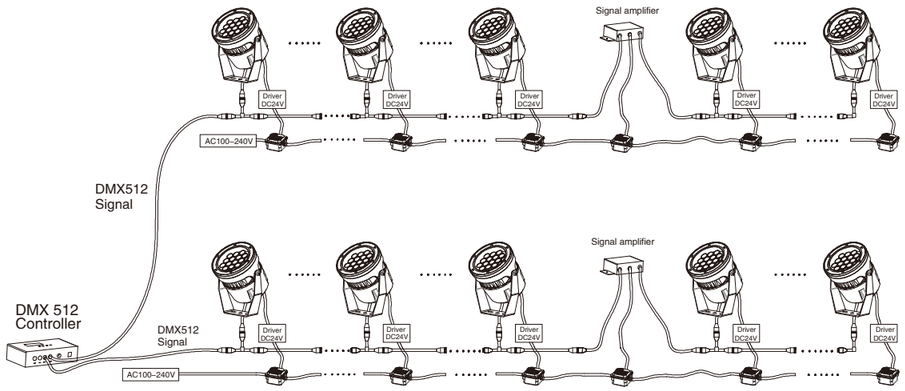

单色 (Single Color)



Flood Light Series


SL1125F


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



SL1125S






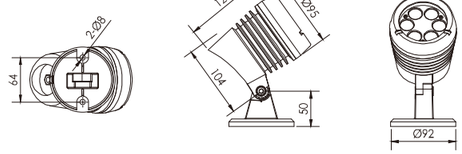


技术参数 Specification

产品型号Product Code	SL1125FC–7	SL1125FB–6	SL1125FA–6	SL1125F–C12
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	7pcs	6pcs	6pcs	1pc
额定功率Rated Power	16W	11W	7W	12W
输入电压Input Voltage	AC100–240V	AC100–240V	AC100–240V	AC100–240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°			15°
控制方式Control Mode	CC	CC	CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%


配光曲线 (全角) Distribution Curve Flux (SBC Case)




SL1125 12°



SL1125 30°



SL1125 45°



SL1125 10X60°

Flood Light Series

SL1126F

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




SL1126S


技术参数 Specification

产品型号Product Code	SL1126FB–3	SL1126FA–3	SL1126F–C6
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	1pc
额定功率Rated Power	6W	3.5W	6W
输入电压Input Voltage	AC100–240V	AC100–240V	AC100–240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°		20°
控制方式Control Mode	CC	CC	CC
使用寿命Life	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%


配光曲线 (全角) Distribution Curve Flux (SBC Case)




SL1126 8°




SL1126 12.5°



SL1126 20°




SL1126 30°



SL1126 45°

Flood Light Series


SL1127F

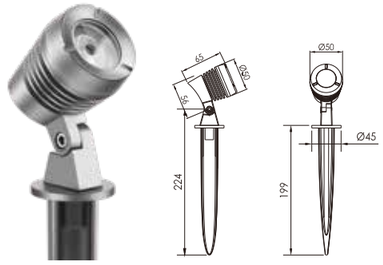



SL1127S















SL1127C


技术参数 Specification

产品型号Product Code	SL1127FC–1	SL1127FA–1
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	1pc	1pc
额定功率Rated Power	3W	1.5W
输入电压Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	Single	Single
发光角度Beam Angle	15° 28°	
控制方式Control Mode	CC	CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP66	IP66
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1127 15°



SL1127 30°




Superhigh®

Flood Light Series


SL1269U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



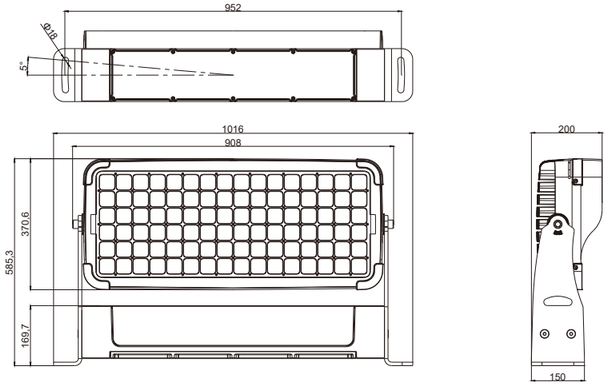

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1269 8°

技术参数 Specification

产品型号/ Product Code	SL1269UM–40	SL1269UM–96	SL1269UE–96	SL1269UL–96
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE XP–L/OSRAM P9	OSRAM RGBW
Led数量/ Led Quantity	40pcs	96pcs	96pcs	96pcs
额定功率/ Rared Power	400W	800W	800W	800W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBW
发光角度/ Beam Angle	1.5°	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DMX512/RDM	CC	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%

产品型号/ Product Code	SL1269UN–96	SL1269UF–96	SL1269UE–96HE
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4 in 1	CREE XHP50
Led数量/ Led Quantity	96pcs	96pcs	96pcs
额定功率/ Rared Power	800W	800W	800W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	Single
发光角度/ Beam Angle	10° 15° 20° 30° 15X60°	8° 15° 20° 30° 15X60°	8° 12° 20° 30° 60° 10X70°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC
使用寿命/ Life	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%

Flood Light Series

SL1272U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti–glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	








SL1272S







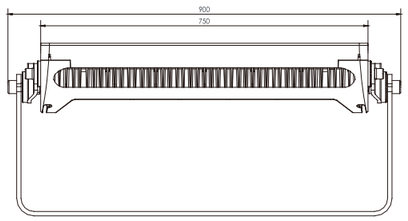

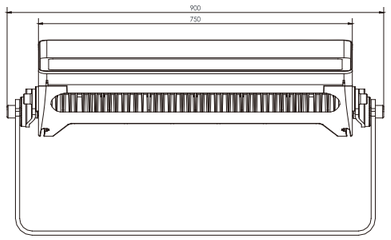



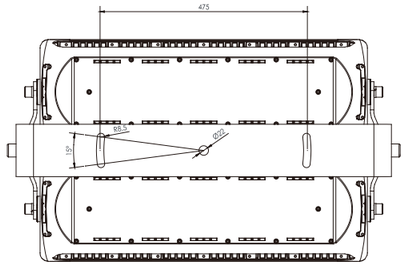




产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1272UM-36	SL1272UM-180	SL1272UD-180	SL1272UC-180
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	36pcs	180pcs	180pcs	180pcs （48R 48G 48B 36W）
额定功率/ Rared Power	360W	600W	600W	420W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBW/RGBA/Single
发光角度/ Beam Rangle	1.5°	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DMX512/RDM	CC	DMX512/RDM/CC
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
产品型号/ Product Code	SL1272UN-80	SL1272UF-80		
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4 in 1		
Led数量/ Led Quantity	80pcs	80pcs		
额定功率/ Rared Power	600W	720W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBWCLA	RGBW		
发光角度/ Beam Rangle	8° 25° 10X45°	8° 25° 10X45°		
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃		
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%		

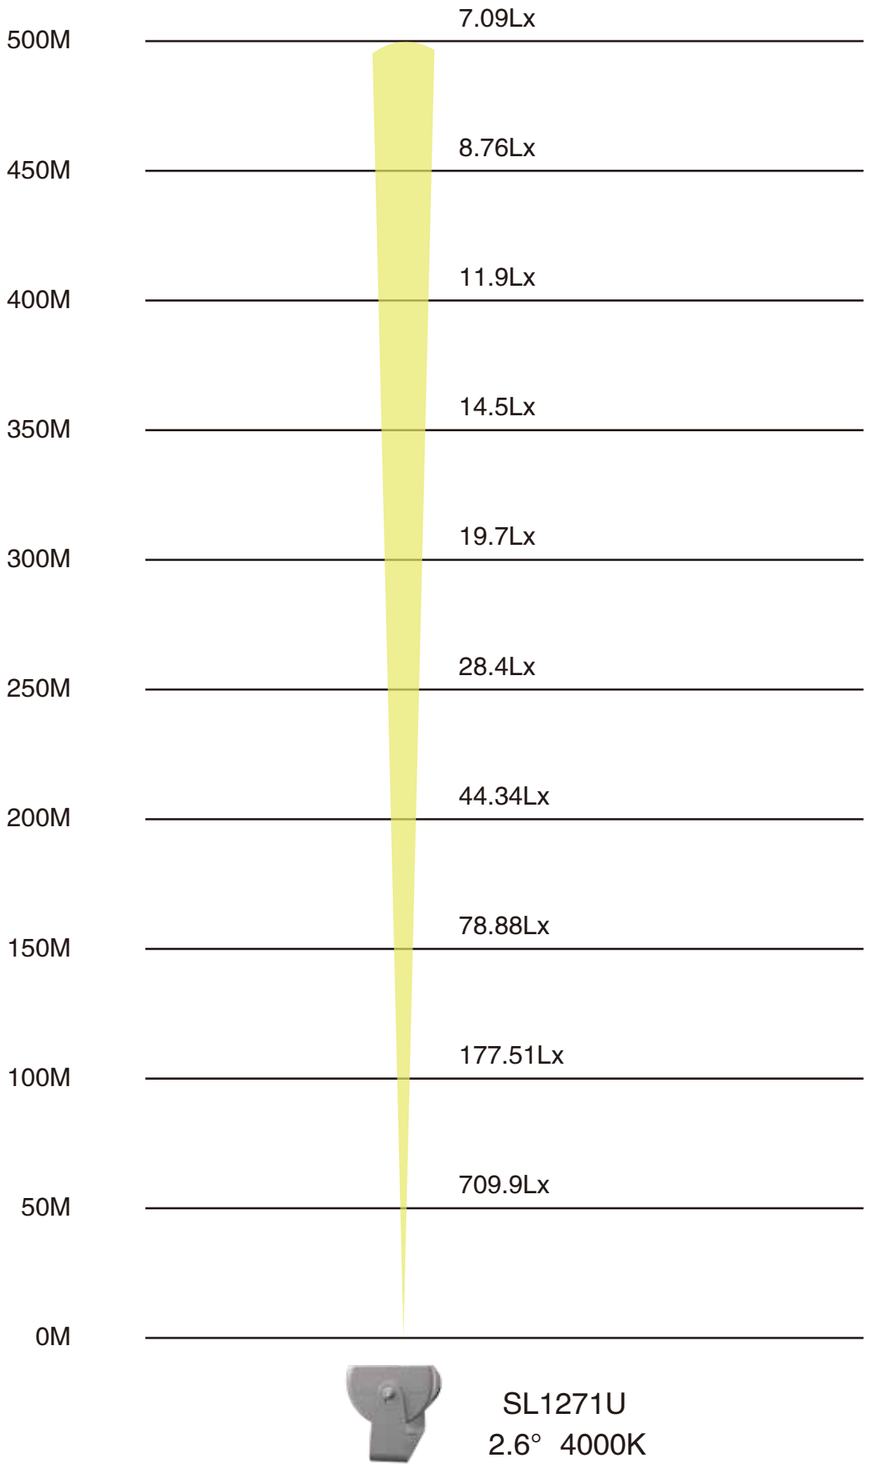

SL1271U
2.6° 4000K

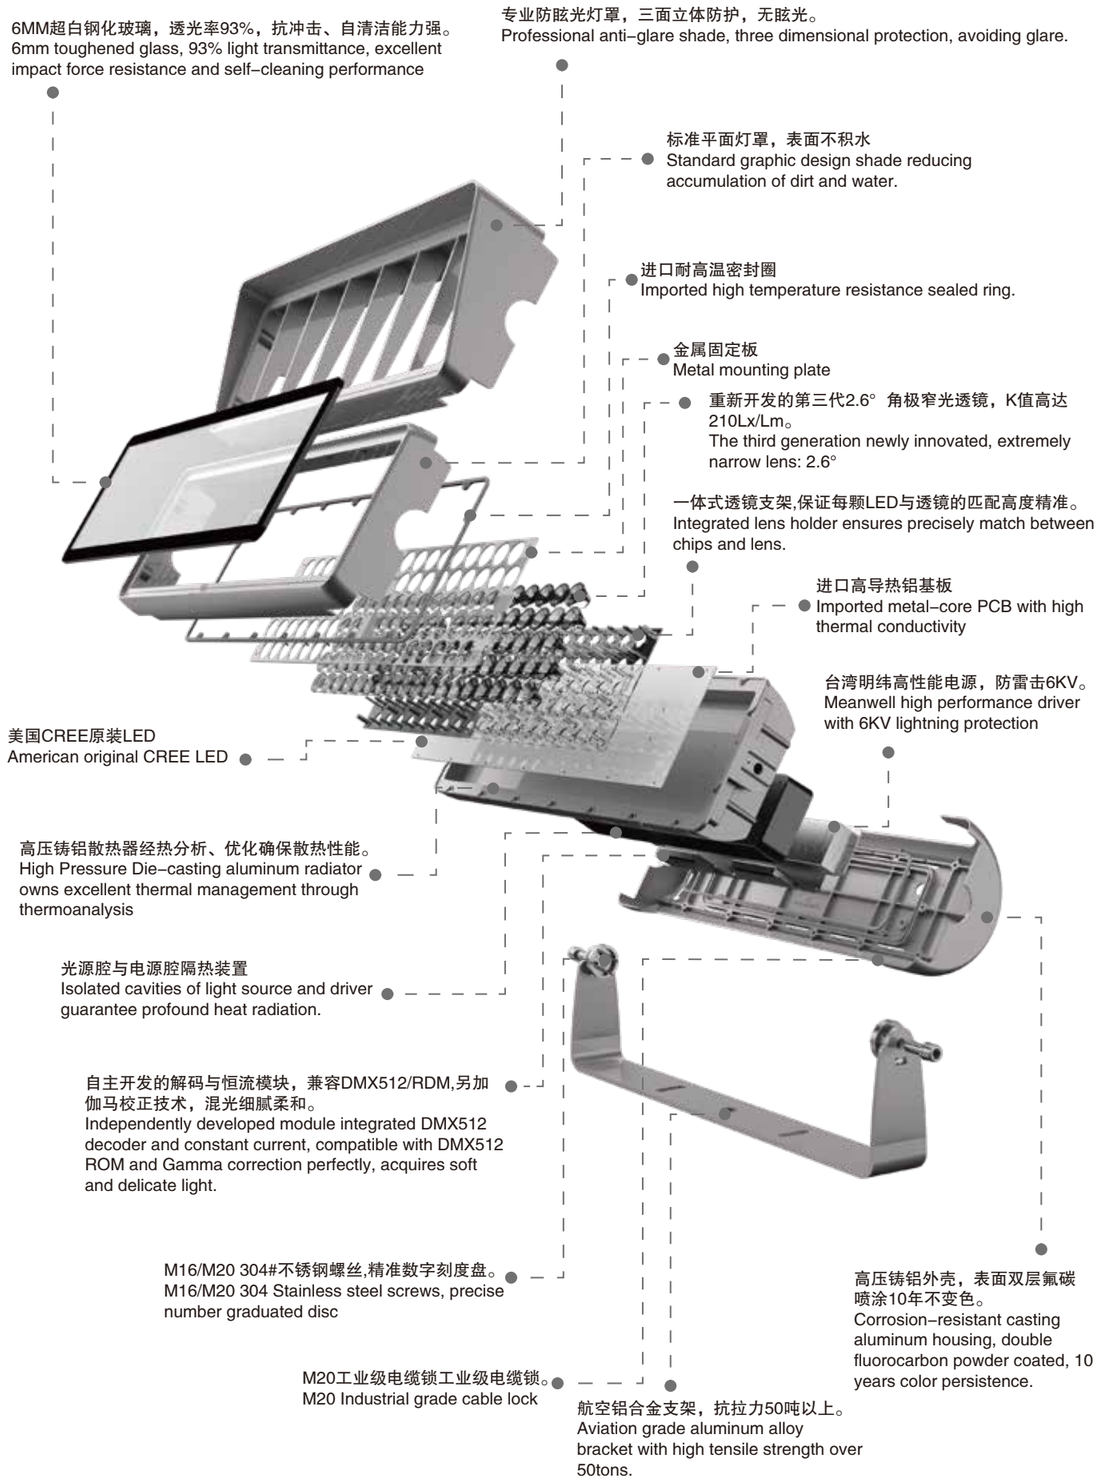

Flood Light Series


SL1271U


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	








SL1271S




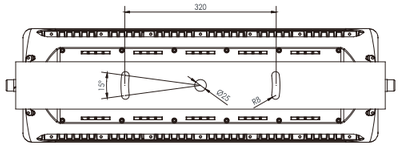

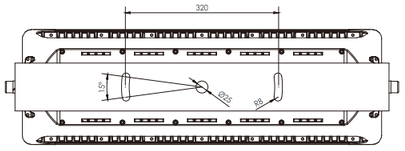



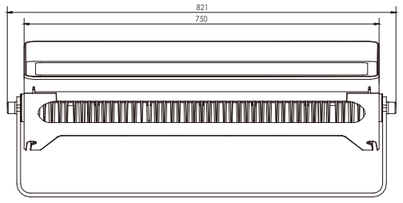

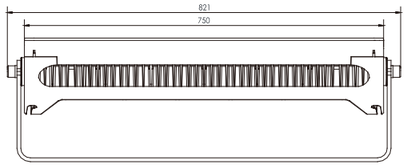

产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1271UM–18	SL1271UM–90	SL1271UD–90	SL1271UC–90
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	18pcs	90pcs	90pcs	90pcs (24R 24G 24B 18W)
额定功率/ Rared Power	180W	300W	300W	210W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K/Pc Amber/RGBW		Single	RGBW/RGBA/Single
发光角度/ Beam Angle	1.5°	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DMX512/RDM	CC	DMX512/RDM/CC
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%

产品型号/ Product Code	SL1271UN–40	SL1271UF–40
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4 in 1
Led数量/ Led Quantity	40pcs	40pcs
额定功率/ Rared Power	300W	360W
输入电压/ Input Voltage	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW
发光角度/ Beam Angle	8° 25° 10X45°	8° 25° 10X45°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1271 3.5°




SL1271 5°




SL1271 8°



SL1271 12°



SL1271 20°



SL1271 10x70°

Flood Light Series


SL1278U


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







SL1278S







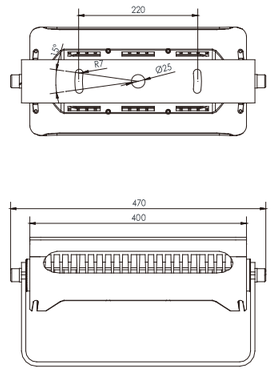

产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1278UM–8	SL1278UM–36	SL1278UD–36	SL1278UC–36	SL1278UR–36
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE
Led数量/ Led Quantity	8pcs	36pcs	36pcs	36pcs（9R 9G 9B 9W)	36pcs
额定功率/ Rared Power	80W	150W	150W	90W	150W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW		Single	RGBW/RGBA/Single	RGBW
发光角度/ Beam Angle	1.5°	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20°		
控制方式/ Control Mode	DMX512/RDM/CC	DMX512/RDM/CC	CC	DMX512/RDM/CC	Bluetooth/DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%

产品型号/ Product Code	SL1278UN–18	SL1278UF–18
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4 in 1
Led数量/ Led Quantity	18pcs	18pcs
额定功率/ Rared Power	150W	150W
输入电压/ Input Voltage	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW
发光角度/ Beam Angle	8° 25° 10X45°	8° 25° 10X45°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1278 6°



SL1278 20°





Flood Light Series

SL1281U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	










SL1281S



SL1281G

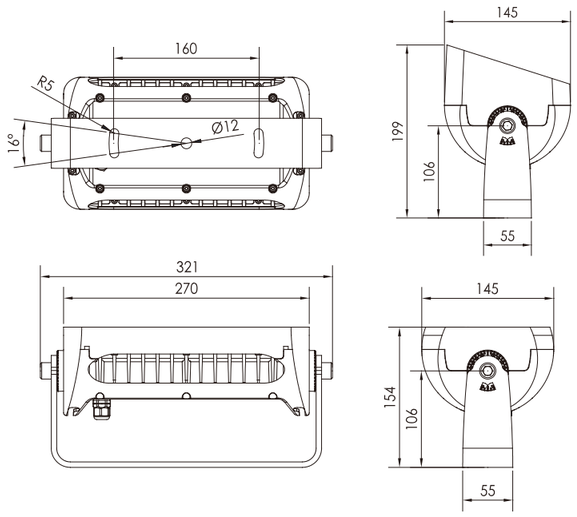

产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM，度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughene d glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1281UM-12	SL1281UE-12	SL1281UD-12	SL1281UF-12
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE XP-L/XP-G3	LUMILEDS	CREE RGBW 4 in 1
Led数量/ Led Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rared Power	56W	56W	40W	72W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	2.6° 6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC	CC	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1281 3.5°




SL1281 12°



SL1281 15°



SL1281 30°



SL1281 60°



Zoomneo®


Flood Light Series

SL1232F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	


reddot winner 2021
innovative product



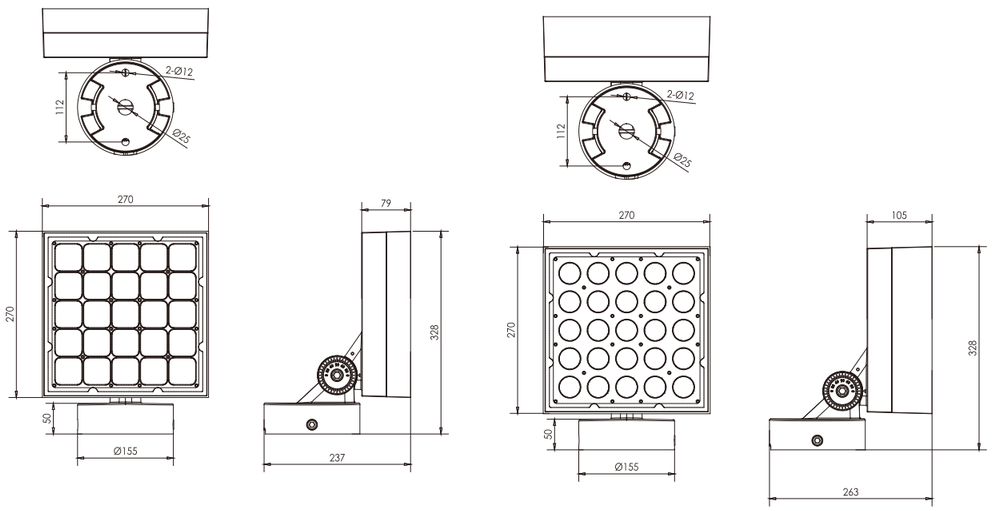




SL1232U

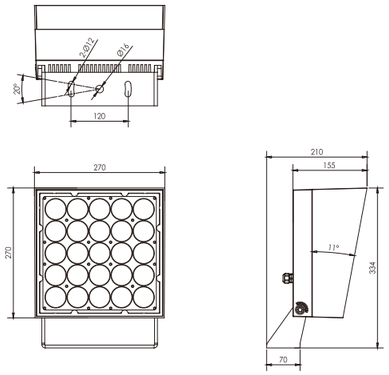




SL1232M

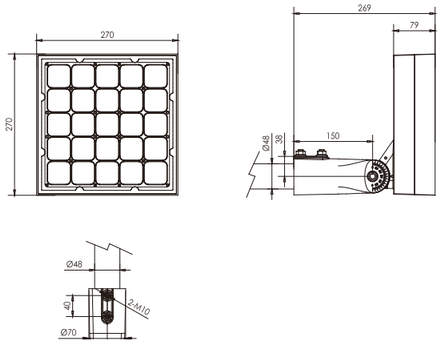



SL1232Z



产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1232FM–9	SL1232FM–25	SL1232FE–25	SL1232FL–24	SL1232FN–24
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE/OSRAM	OSRAM RGBW	RGBWCLA 7in1
Led数量/ Led Quantity	9pcs	25pcs	25pcs	24pcs	24pcs
额定功率/ Rared Power	90W	120W	120W	150W	150W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	DC24V/AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW		Single	RGBW	RGBWCLA
发光角度/ Beam Angle	1.5°	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°		10° 15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%

产品型号/ Product Code	SL1232FF–24	SL1232FC–48	SL1232FB–48	SL1232FZ–96	SL1232F–C120
Led品牌/ Led Brand	CREE RGBW 4in1	OSRAM	OSRAM	CREE	CREE COB
Led数量/ Led Quantity	24pcs	48pcs	48pcs	96pcs	4pcs
额定功率/ Rared Power	150W	120W	120W	120W	120W
输入电压/ Input Voltage	DC36V/AC100–305V	DC36V/AC100–305V	DC36V/AC100–305	DC24V/AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single	RGBW	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 15X60°	8° 15° 20° 30° 45° 20X40° 15X25°		7～36° Photoelectron zoom	12° 24° 36° 70°
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	Touch screen	CC/DALI/0–10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1232 3.5°



SL1232 15°



SL1232 24°



SL1232 30°





Flood Light Series


SL1235F


圆孔格栅 Round–meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti–glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





















SL1235U

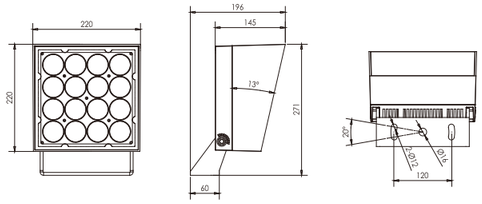




SL1235M

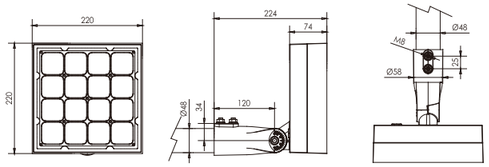



SL1235Z

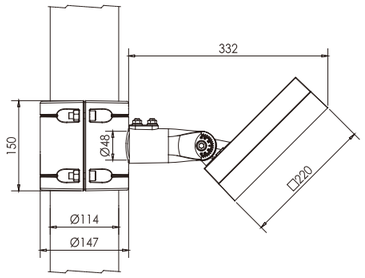





SL1235L



SL1235H




适配杆径(67–325)mm T≥4
AVL Dia of pole(67–325)mm T≥4




适配树杆尺寸(168–268)mm
AVL Dia of pole(168–268)mm


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1235 8°




SL1235 12°



SL1235 15°



SL1235 24°



SL1235 30°

产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation ful ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gra control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1235FM–5	SL1235FM–16	SL1235FE–16	SL1235FL–16	SL1235FN–16
Led品牌/ Led Brand	OSRAM OSTAR PRO	OSRAM OSTAR PRO	CREE/OSRAM	OSRAM	RGBWCLA 7in1
Led数量/ Led Quantity	5pcs	16pcs	16pcs	16pcs	16pcs
额定功率/ Rared Power	50W（U type)	75W	75W	100W	100W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	DC24V/AC100–305V	DC36V/AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW		Single	RGBW	RGBWCLA
发光角度/ Beam Angle	1.5°	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°		10° 15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	16/13(pcs)	16/13(pcs)	16/13(pcs)	2/13(pcs)	2/13(pcs)

产品型号/ Product Code	SL1235FF–16	SL1235FC–32	SL1235FB–32	SL1235FZ–64	SL1235F–C80
Led品牌/ Led Brand	CREE RGBW 4in1	OSRAM	OSRAM	CREE	CREE COB
Led数量/ Led Quantity	16pcs	32pcs	32pcs	64pcs	4pcs
额定功率/ Rared Power	100W	75W	75W	75W	75W
输入电压/ Input Voltage	DC36V/AC100–305V		DC36V/AC100–305	DC24V/AC100–305V	AC100–264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGBW	RGBW	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 15X60°	8° 15° 20° 30° 45° 20X40° 15X25°		7～36° Photoelectron zoom	12° 24° 38° 45° 60°
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	Touch screen	CC/DALI/0–10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	2/13(pcs)	16/13(pcs)	2/13(pcs)	2/13(pcs)	13pcs

Flood Light Series


SL1236F


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	








SL1236S






















SL1236U





SL1236M


















SL1236Z

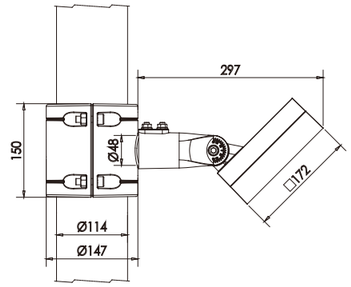




SL1236L



适配杆径(67–325)mm T≥4
AVL Dia of pole(67–325)mm T≥4



SL1236H



适配树杆尺寸(168–268)mm
AVL Dia of pole(168–268)mm

产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation ful ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gra control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1236FM–9	SL1236FE–9	SL1236FL–9	SL1236FF–9
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE/OSRAM	OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rared Power	45W	45W	60W	60W
输入电压/ Input Voltage	AC100–264V	AC100–264V	DC36V/AC100–305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°		8° 15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	28/22(pcs)	28/22(pcs)	3/22(pcs)	3/22(pcs)

产品型号/ Product Code	SL1236FC–18	SL1236FB–18	SL1236FZ–36	SL1236F–C50
Led品牌/ Led Brand	LUMILEDS/OSRAM	LUMILEDS/OSRAM	CREE	CREE COB
Led数量/ Led Quantity	18pcs	18pcs	36pcs	1pcs
额定功率/ Rared Power	45W	45W	45W	45W
输入电压/ Input Voltage	DC24V/AC100–240V	DC24V/AC100–305	DC36V/AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	RGBW	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20X40° 15X25°		7～36° Photoelectron zoom	12° 24° 36° 70°
控制方式/ Control Mode	CC/DALI/0–10V	DMX512/RDM	Touch screen	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	2/22(pcs)	4/36(pcs)	3/33(pcs)	28pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1236 8°



SL1236 20°



SL1236 60°



Flood Light Series


SL1239F


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	








SL1239S





















SL1239U

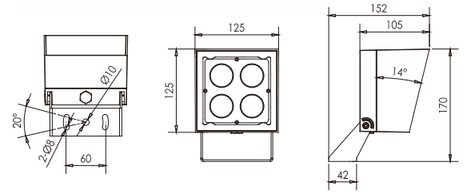




SL1239M

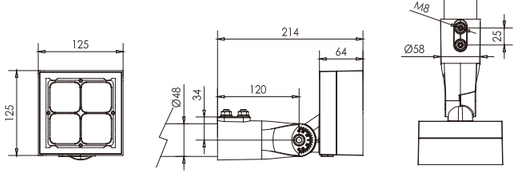




SL1239Z





SL1239L




适配杆径(67–325)mm T≥4

AVL Dia of pole(67–325)mm T≥4



SL1239H



适配树杆尺寸(168–268)mm

AVL Dia of pole(168–268)mm

产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation ful ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gra control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification


产品型号/ Product Code	SL1239FM-4	SL1239FE-4	SL1239FL-4	SL1239FF-4
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE/OSRAM	OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	4pcs	4pcs	4pcs	4pcs
额定功率/ Rared Power	20W	20W	30W	20W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	2700K/3000K/4000K/6500K/Pc Amber	Single	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°		8° 15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	61pcs	61pcs	4pcs	4pcs


产品型号/ Product Code	SL1239FB-8	SL1239FZ-16	SL1239F-C20
Led品牌/ Led Brand	OSRAM	CREE	CREE COB
Led数量/ Led Quantity	8pcs	16pcs	1pcs
额定功率/ Rared Power	20W	20W	20W
输入电压/ Input Voltage	DC24V/AC100-240V	DC24V/AC100-305V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20X40° 15X25°	7～36° Photoelectron zoom	12° 24° 38° 45° 60°
控制方式/ Control Mode	CC/DALI/0-10V/DMX512	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	66pcs	8/70pcs	66pcs


配光曲线（半角）Distribution Curve Flux (SBC Case)



SL1239 3.5°


SL1239 20°


SL1239 4x35°


SL1239 10x70°


SL1239 15x60°


SL1239 30x85°

Flood Light Series

SL1240U


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	








SL1240C















SL1240S

技术参数 Specification


产品型号/ Product Code	SL1240UM-1	SL1240UE-1	SL1240UF-1
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE/OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rared Power	10W	10W	10W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	2700K/3000K/4000K/6500K/Pc Amber	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	8° 15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%

产品型号/ Product Code	SL1240UB-4	SL1240UZ-4	SL1240F-C12
Led品牌/ Led Brand	OSRAM	CREE	CREE COB
Led数量/ Led Quantity	4pcs	4pcs	1pcs
额定功率/ Rared Power	10W	10W	12W
输入电压/ Input Voltage	DC12V/AC100-240V	DC24V/AC100-305V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20X40° 15X25°	7～36° Photoelectron zoom	12° 24° 36°
控制方式/ Control Mode	CC	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%


配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1240 8°



SL1240 12°



SL1240 45°



135 SHYLON

Flood Light Series


SL1245F


防眩遮光罩 Anti-glare shield		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







SL1245C



















SL1245S


配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1245 8°



SL1245 12°



SL1245 15°

技术参数 Specification

产品型号/ Product Code	SL1245FM–1	SL1245FE–1	SL1245FF–1
Led品牌/ Led Brand	OSRAM OSTAR PRO	CREE XHP35	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rared Power	10W	10W	8W
输入电压/ Input Voltage	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	2700K/3000K/4000K/6500K/Pc Amber	Single	RGBW
发光角度/ Beam Angle	2.5°	6° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	DMX512(External drive)
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%




Flood Light Series

SL1246U


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



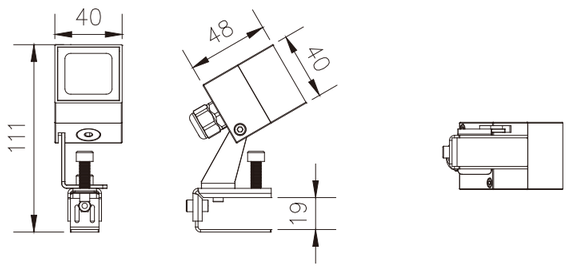





SL1246C





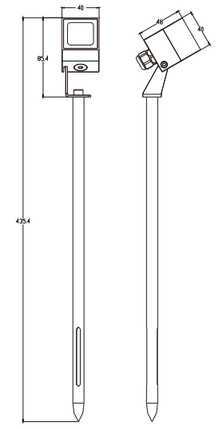

SL1246S



标配
Standard

可选斜罩
Optional visor

技术参数 Specification

产品型号/ Product Code	SL1246FE-1	SL1246FF-1
Led品牌/ Led Brand	OSRAM	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs
额定功率/ Rared Power	6W	6W
输入电压/ Input Voltage	AC100-264V / DC12V	DC12V
频率/ Frequency Range	50/60Hz	/
颜色 / Color	Single	RGBW
发光角度/ Beam Angle	8° 12.5° 20° 30° 60° 15X30° 10X60°	20° 40° 60° 15X60° 15X25°
控制方式/ Control Mode	CC	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%




Flood Light Series

SL1247U


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




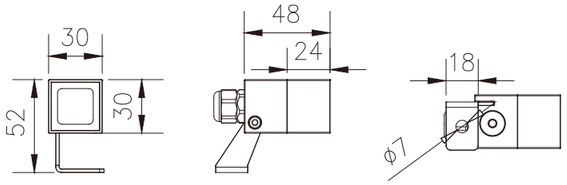




SL1247C



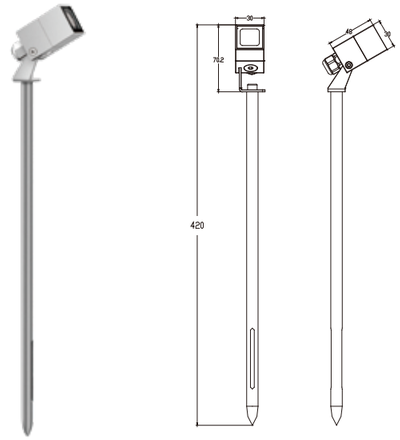

SL1247S



标配
Standard

可选斜罩
Optional visor

技术参数 Specification

产品型号/ Product Code	SL1247FE-1	
Led品牌/ Led Brand	OSRAM	
Led数量/ Led Quantity	1pcs	
额定功率/ Rared Power	3W	
输入电压/ Input Voltage	DC12V / DC24V	
频率/ Frequency Range	50/60Hz	
颜色 / Color	Single	
发光角度/ Beam Angle	20° 30° 45° 60° 25X45°	
控制方式/ Control Mode	CC	
使用寿命/ Life	50000H	
防护等级/ Protection Grade	IP66	
环境温度/ Ambient Temperature	-25℃∽50℃	
环境湿度/ Ambient Humidity	10%∽90%	




Flood Light Series


SL1258U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	









产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/Product Code	SL1258UB-120	SL1258UB-90	SL1258UB-70
LED品牌/LED Brand	CREE	CREE	CREE
LED数量/LED Quantity	120pcs	90pcs	70pcs
额定功率/Rated Power	225W	185W	150W
输入电压/Input Voltage	DC36V/AC90-265V	DC36V/AC90-265V	AC180-305V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15X30° 10X60°		
控制方式/Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/Life	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	1/6(pcs)	1/6(pcs)	8(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1258 12°



SL1258 20°



SL1258 30°



SL1258 150x120°



Flood Light Series

SL1260U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




SL1260UB–50



SL1260UB–30F



SL1260G

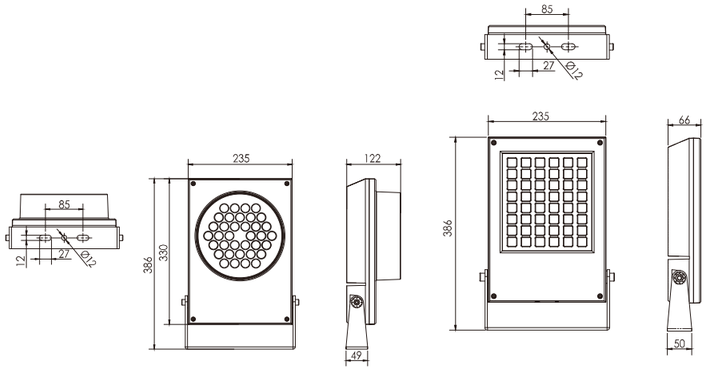

产品简介 Product Introduction


一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1260UC–50	SL1260UB–50	SL1260UB–30	SL1260UB–30F
Led品牌/ Led Brand	OSRAM	CREE	CREE	CREE
Led数量/ Led Quantity	48pcs	48pcs	30pcs	30pcs
额定功率/ Rared Power	120W	102W/82W	60W	60W
输入电压/ Input Voltage	AC200–240V	DC36V/AC90–265V	DC24V/AC90–265V	AC90–265V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	RGB/Single	RGBW/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 48° 60° 15X30° 10X60°			120X70°
控制方式/ Control Mode	CC	DMX512/CC	DMX512/CC	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	10pcs	2/12(pcs)	2/22(pcs)	22pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1260 8°




SL1260 12°




SL1260 25°



SL1260 45°



SL1260 40°



SL1260 120x70°

Flood Light Series

SL1260F

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




SL1260FB–30F



SL1260FB–50




SL1260X

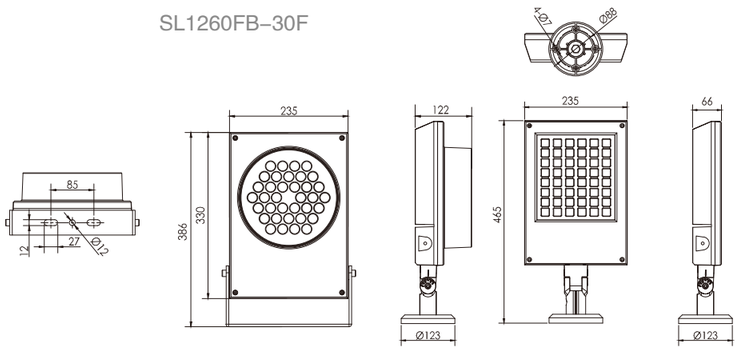


技术参数 Specification

产品型号/ Product Code	SL1260FC–50	SL1260FB–50	SL1260FB–30	SL1260FB–30F
Led品牌/ Led Brand	OSRAM	CREE	CREE	CREE
Led数量/ Led Quantity	48pcs	48pcs	30pcs	30pcs
额定功率/ Rared Power	120W	102W/82W	60W	60W
输入电压/ Input Voltage	AC90–265V	AC90–265V	AC90–265V	AC90–265V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 48° 60° 15X30° 10X60°			120X70°
控制方式/ Control Mode	CC	CC	CC	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	10pcs	12pcs	22pcs	22pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1260 8°



SL1260 12°



Flood Light Series


SL1262U


蜂窝格栅 Honeycomb glass		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





SL1262UB–28F







技术参数 Specification

产品型号Product Code	SL1262UB–20	SL1262UB–18	SL1262UB–12	SL1262UB–28F
LED品牌LED Brand	CREE	CREE	CREE	NICHIA/LUMILEDS
LED数量LED Quantity	20pcs	18pcs	12pcs	28pcs
额定功率Rated Power	36W	30W	22W	30W
输入电压Input Voltage	AC90–265V	DC24V	DC24V /AC90–265V	AC90–265V
频率Frequency Range	50/60Hz	/	50/60Hz	50/60Hz
颜色Color	Single	RGB/Single	RGB/Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 48° 60° 15X30° 10X60°			120X70°
控制方式Control Model	CC	DMX512/CC	DMX512/CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10%~90%	10%~90%	10%~90%	10% ~ 90%
串联数量/ In series(max)	36pcs	4pcs	6/60(pcs)	44pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1262 20°



SL1262 45°



SL1262 60°



SL1262 120x70°


Flood Light Series

SL1318


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




A型

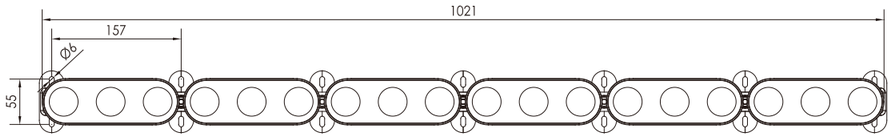


B型

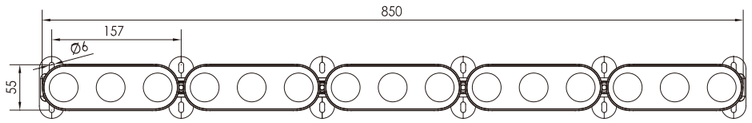

C型

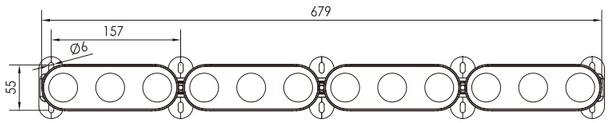





技术参数 Specification

产品型号/ Product Code	SL1318AE–18	SL1318AD–18	SL1318AF–18	SL1318AJ–18
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	18pcs	18pcs	18pcs	18pcs
额定功率/ Rared Power	90W	72W	144W	72W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	14/1(pcs)	18/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1318BE–15	SL1318BD–15	SL1318BF–15	SL1318BJ–15
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	15pcs	15pcs	15pcs	15pcs
额定功率/ Rared Power	75W	60W	120W	60W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	16/2(pcs)	22/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1318CE–12	SL1318CD–12	SL1318CF–12	SL1318CJ–12
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rared Power	60W	48W	96W	48W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	22/2(pcs)	26/3(pcs)	1pcs	3pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1318 6°




SL1318 12°




SL1318 20°



SL1318 30°



SL1318 60°



SL1318 10x70°


Flood Light Series

SL1318U


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




D型

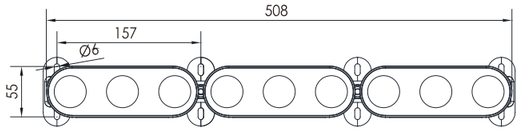

E型

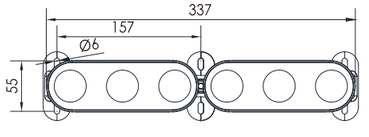

U型

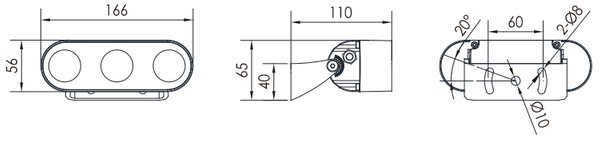

技术参数 Specification

产品型号/ Product Code	SL1318DE-9	SL1318DD-9	SL1318DF-9	SL1318DJ-9
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rared Power	45W	36W	72W	36W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	28/3(pcs)	36/4(pcs)	2pcs	4pcs
产品型号/ Product Code	SL1318EE-6	SL1318ED-6	SL1318EF-6	SL1318EJ-6
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs
额定功率/ Rared Power	30W	24W	48W	24W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44/4(pcs)	55/6(pcs)	3pcs	6pcs
产品型号/ Product Code	SL1318UE-3	SL1318UD-3	SL1318UF-3	SL1318UJ-3
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	3pcs	3pcs	3pcs	3pcs
额定功率/ Rared Power	15W	12W	24W	12W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	88/9(pcs)	110/12(pcs)	6pcs	12pcs


Flood Light Series

SL1319

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

reddot winner 2020




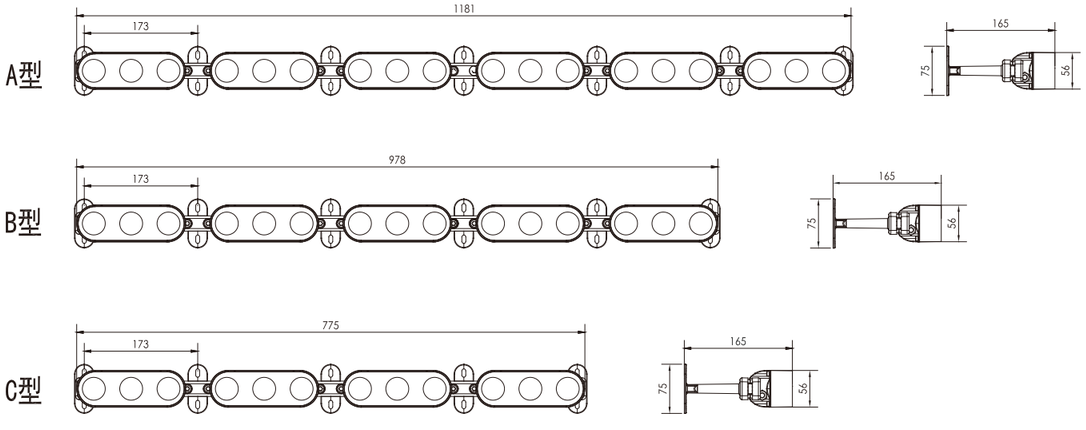


技术参数 Specification

产品型号/ Product Code	SL1319AE–18	SL1319AD–18	SL1319AF–18	SL1319AJ–18
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	18pcs	18pcs	18pcs	18pcs
额定功率/ Rared Power	90W	72W	144W	72W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	14/1(pcs)	18/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1319BE–15	SL1319BD–15	SL1319BF–15	SL1319BJ–15
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	15pcs	15pcs	15pcs	15pcs
额定功率/ Rared Power	75W	60W	120W	60W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	16/2(pcs)	22/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1319CE–12	SL1319CD–12	SL1319CF–12	SL1319CJ–12
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rared Power	60W	48W	96W	48W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	22/2(pcs)	26/3(pcs)	1pcs	3pcs


配光曲线 (半角）Distribution Curve Flux (SBC Case)




SL1319 6°




SL1319 12°




SL1319 20°



SL1319 30°



SL1319 60°



SL1319 10x70°


Flood Light Series


SL1319U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





D型







E型





U型





技术参数 Specification


产品型号/ Product Code	SL1319DE–9	SL1319DD–9	SL1319DF–9	SL1319DJ–9
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rared Power	45W	36W	72W	36W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	28/3(pcs)	36/4(pcs)	2pcs	4pcs
产品型号/ Product Code	SL1319EE–6	SL1319ED–6	SL1319EF–6	SL1319EJ–6
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs
额定功率/ Rared Power	30W	24W	48W	24W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44/4(pcs)	55/6(pcs)	3pcs	6pcs
产品型号/ Product Code	SL1318UE–3	SL1319UD–3	SL1319UF–3	SL1319UJ–3
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	3pcs	3pcs	3pcs	3pcs
额定功率/ Rared Power	15W	12W	24W	12W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 15X60°	10° 20° 30° 15X60°
控制方式/ Control Mode	CC	CC	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	88/8(pcs)	110/12(pcs)	6pcs	12pcs

Flood Light Series

SL1310A

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



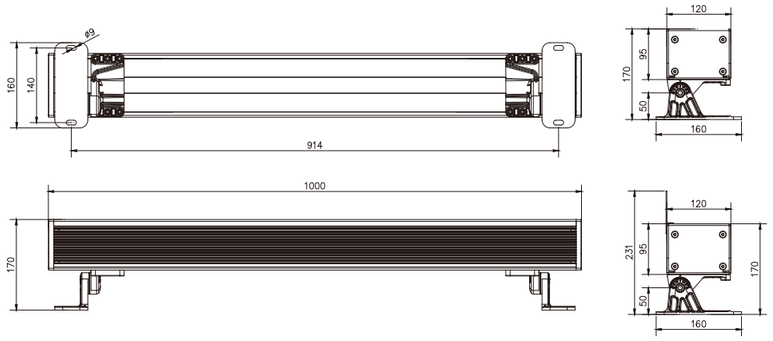

技术参数 Specification


产品型号/ Product Code	SL1310AM–48	SL1310AE–48	SL1310AF–48	SL1310AC–108
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L/OSRAM P9	OSRAM RGBW 4in1	CREE XP–G3
LED数量/ LED Quantity	48pcs	48pcs	48pcs	108pcs
额定功率/ Rared Power	300W	300W	300W	300W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 10X30° 10X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	DMX512/RDM	CC/DALI/0–10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃⌣50℃	–25℃⌣50℃	–25℃⌣50℃	–25℃⌣50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4pcs	4pcs	4pcs	4pcs





Flood Light Series

SL1310B

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

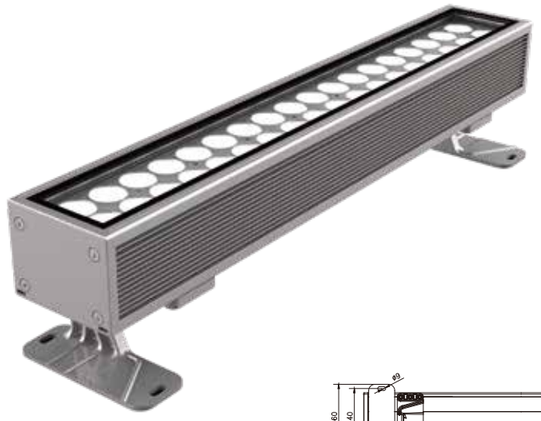

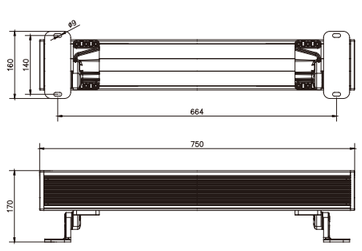




技术参数 Specification


产品型号/ Product Code	SL1310BM–36	SL1310BE–36	SL1310BF–36	SL1310BC–80
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L/OSRAM P9	OSRAM RGBW 4in1	CREE XP–G3
LED数量/ LED Quantity	36pcs	36pcs	36pcs	80pcs
额定功率/ Rared Power	240W	240W	240W	220W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 10X30° 10X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	CC/DALI/0–10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	5pcs	5pcs	5pcs	6pcs


Flood Light Series

SL1310C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

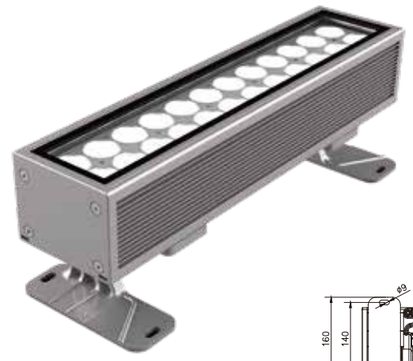





技术参数 Specification


产品型号/ Product Code	SL1310CM–24	SL1310CE–24	SL1310CF–24	SL1310CC–54
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L/OSRAM P9	OSRAM RGBW 4in1	CREE XP–G3
LED数量/ LED Quantity	24pcs	24pcs	24pcs	54pcs
额定功率/ Rared Power	160W	160W	160W	160W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 10X30° 10X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	CC/DALI/0–10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	8pcs	8pcs	8pcs	8pcs


Flood Light Series

SL1310D

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







技术参数 Specification


产品型号/ Product Code	SL1310DM–18	SL1310DE–18	SL1310DF–18	SL1310DC–40
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L/OSRAM P9	OSRAM RGBW 4in1	CREE XP–G3
LED数量/ LED Quantity	18pcs	18pcs	18pcs	40pcs
额定功率/ Rared Power	120W	120W	120W	120W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 10X30° 10X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	CC/DALI/0–10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	10pcs	10pcs	10pcs	10pcs


Flood Light Series

SL1310E

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







技术参数 Specification


产品型号/ Product Code	SL1310EM–12	SL1310CE–24	SL1310EF–12	SL1310EC–28
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L/OSRAM P9	OSRAM RGBW 4in1	CREE XP–G3
LED数量/ LED Quantity	12pcs	12pcs	24pcs	28pcs
额定功率/ Rared Power	80W	80W	80W	80W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 10X30° 10X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	CC/DALI/0–10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	15pcs	15pcs	15pcs	15pcs


LED Tree Light


SL1132T


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	











产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1132TE-25	SL1132TD-25	SL1132TF-24	SL1132TC-72
Led品牌/ Led Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE XP-E2
Led数量/ Led Quantity	25pcs	25pcs	24pcs	72pcs
额定功率/ Rared Power	120W	85W	150W/200W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC36V / AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 3.5° 6° 12° 20° 30° 45° 60° 10X70° 5X20		15° 20° 30° 15X60°	5° 8° 12.5° 30° 10X60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%




配光曲线（半角）Distribution Curve Flux (SBC Case)




SL1132 6°




SL1132 15°




SL1132 30°



SL1132 60°



SL1132 15x60°



SL1132 10x70°


LED Tree Light


SL1135T


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	


reddot winner 2020











产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design,could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1135TE–16	SL1135TD–16	SL1135TF–16	SL1135TC–48
Led品牌/ Led Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in1	CREE XP–E2
Led数量/ Led Quantity	16pcs	16pcs	16pcs	48pcs
额定功率/ Rared Power	75W	60W	100W	100W
输入电压/ Input Voltage	AC100–305V	AC100–305V	DC36V / AC100–305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 3.5° 6° 12° 20° 30° 45° 60° 10X70° 5X20		15° 20° 30° 15X60°	5° 8° 12.5° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	16pcs	22pcs	2/12pcs	2/12pcs




配光曲线 (半角）Distribution Curve Flux (SBC Case)




SL1135 3.5°




SL1135 12°




SL1135 20°



SL1135 30°



SL1135 60°




SL1135 10x70°


LED Tree Light


SL1136T


圆孔格栅 Round–meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti–glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	












技术参数 Specification

产品型号/ Product Code	SL1136TE–9	SL1136TD–9	SL1136TF–9	SL1136TC–27
Led品牌/ Led Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in1	CREE XP–E2
Led数量/ Led Quantity	9pcs	9pcs	9pcs	30pcs
额定功率/ Rared Power	45W	35W	60W	60W
输入电压/ Input Voltage	AC100–264V	AC100–264V	DC36V / AC100–305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 3.5° 6° 12° 20° 30° 45° 60° 10X70° 5X20°		15° 20° 30° 15X60°	5° 8° 12.5° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	28pcs	36pcs	3/22pcs	3/22pcs

SL1132T / SL1135T / SL1136T / SL1137T

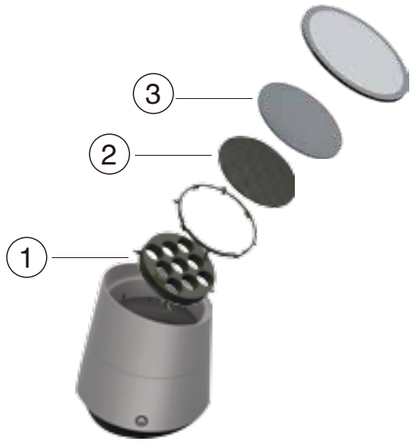


控光配件 control light accessories

3.蜂窝玻璃
Honeycomb glass


2.蜂窝格栅
Honeycomb grill

1.圆孔格栅
Round–meshed grill


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL1136 6°




SL1136 8°




SL1136 12°




SL1136 20°



SL1136 30°



SL1136 60°




SL1136 10x70°


LED Tree Light


SL1137T


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	













技术参数 Specification


产品型号/ Product Code	SL1137TE–6	SL1137TD–6	SL1137TF–6	SL1137TC–18
LED品牌/ LED Brand	CREE XP–L	CREE XP–G3	CREE RGBW 4 in 1	CREE XP–E
LED数量/ LED Quantity	6pcs	6pcs	6pcs	18pcs
额定功率/ Rared Power	30W	22W	30W	36W
输入电压/ Input Voltage	AC100–264V	AC100–DC264V	DC24V/AC100–264V	DC24V/AC100–264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 3.5° 6° 12° 20° 30° 45° 60° 10X70° 5X20°		15° 20° 30° 15X60°	5° 8° 12.5° 30° 15X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃	–25℃⌒50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44pcs	60pcs	4/44pcs	4/36pcs

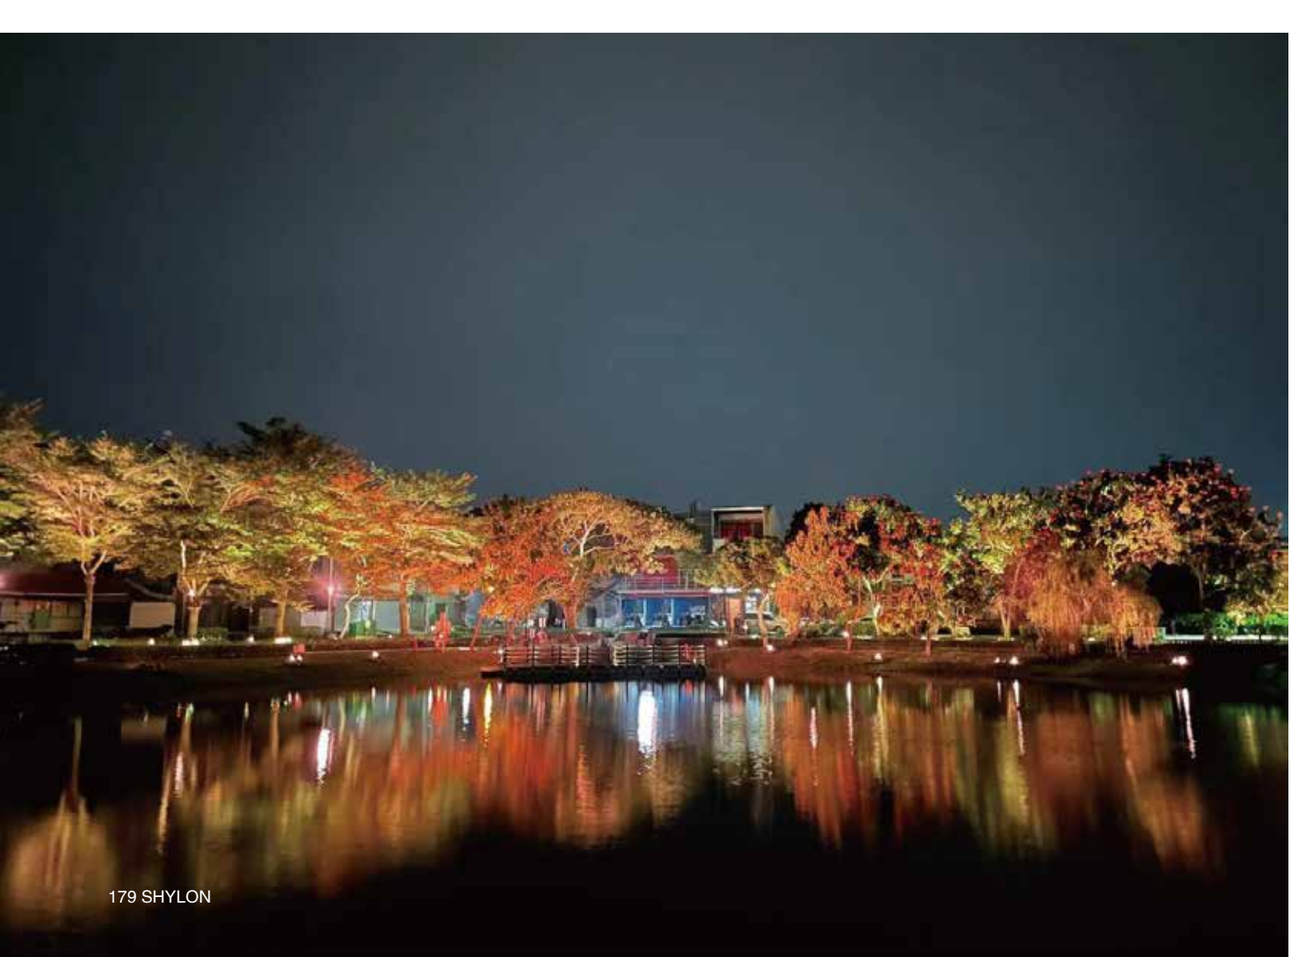


配光曲线 (半角）Distribution Curve Flux (SBC Case)




SL1137 8°




SL1137 12°



SL1137 15°



SL1137 30°

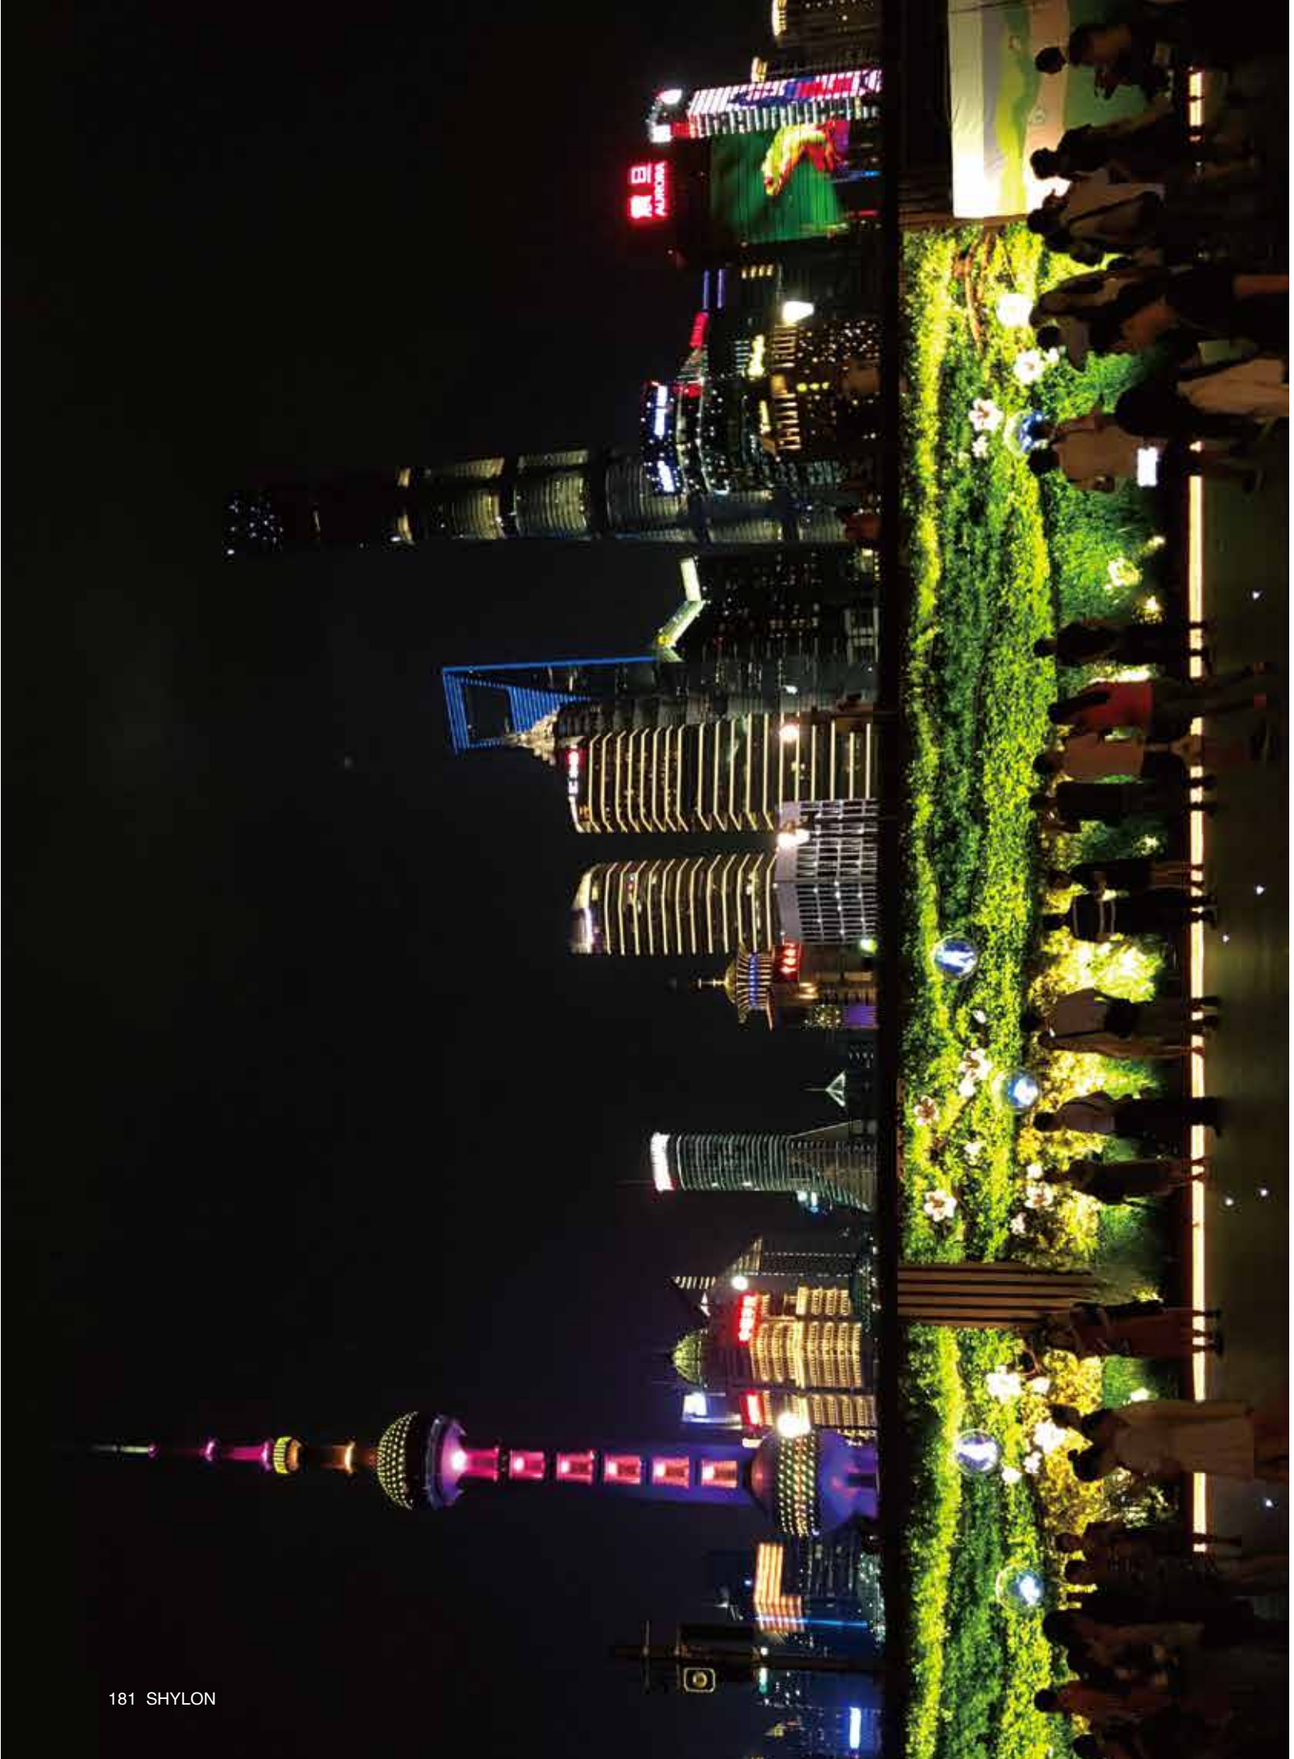

灯体自带30度一体化遮光罩，内部采用高端博物馆照明的防眩光方案, 可选用圆孔格栅, 蜂窝格栅, 布纹玻璃等防眩和控光措施实现见光不见灯的效果。
With external 30 degree Integrated hood and internal anti–glare solution which usually for high–end museum lighting, this uplight also provides round–meshed grill, honeycomb grill, textured glass to get the “only lighting no lamp” effect.

全系列产品均已通过3C、CE、ETL认证测试要求，并获得认证证书。产品工业设计由芯龙欧洲设计中心完成，正在申报全球多个设计大奖，产品的光学和结构组合在国内已申请发明专利。
Designed by SHYLON Europe Design Centre, whole uplight series have got CCC, CE, ETL certificates, and is applying for various Industrial design awards, and the optical design and body structure have applied for patent in China. .



产品标配美国CREE LED，根据LED的光学特点自主开发3.5° /12° / 20° / 30° / 60° / 10X70° / 5X20° /照树配光等全系列私模透镜实现精准光学。
Based on CREE LED chips, we develop 3.5° /12° / 20° / 30° / 60° / 10X70° / 5X20° private lens for profes–sional tree lighting, which can realize precise lighting effect.

发明了一种特殊结构，灯体上只有两个固定点就可实现灯具前后调角15度，水平调角15度，操作方便，安装牢固；灯具的核心部件全部位于灯体上部，底座预留了130mm以上的空间容纳支架和配件部分，不超130mm水深的浸水淹没，对灯具没有影响。
We develop a special structure which can adjust 15deg by vertically and horizontally realized by two fixed points, and it is easy to operate and securely installed; All core parts are in the upper space of uplight, there is 130mm height for brackets and fitting parts, no influences on uplight for water lower than 130mm.


高压铸铝灯体, 平均壁厚大于2.5mm,专利技术内外组合式散热设计；采用进口硅胶密封圈,耐高低温,耐老化。产品表面双层氟碳喷涂，耐候能力十年以上。灯具的安装底座采用抗UV增强型PC（聚碳酸酯），适合长期接触地面，防腐性能优良。
High pressure die casting aluminum light body with more than 2.5mm thickness; Patented internal and external combined heat dissipation design;
Imported silicone sealing ring ensures resistance to high/low temperature and aging; Double layer fluorocarbon coating provides a 10years ; Made in UV–resistant PC, Light base is suitable for long–term contact with the ground and has excellent corrosion resistance.


Inground Light Series


SL2311A

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



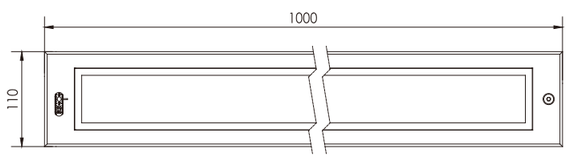



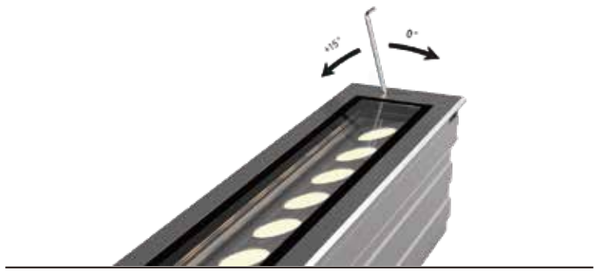

技术参数 Specification

产品型号/ Product Code	SL2311AM–20	SL2311AE–20	SL2311AD–20	SL2311AF–20	SL2311AH–20
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE XP–G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/ LED Quantity	20pcs	20pcs	20pcs	20pcs	20pcs
额定功率/ Rared Power	100W	100W	60W	100W	60W
输入电压/ Input Voltage	AC176–264V	AC176–264V	AC90–264V	AC176–264V	AC90–264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/6500K Pc Amber	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 10X30° 10X60°	20° 30° 10X30° 10X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	12pcs	12pcs	20pcs	12pcs	20pcs





Inground Light Series

SL2311B

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



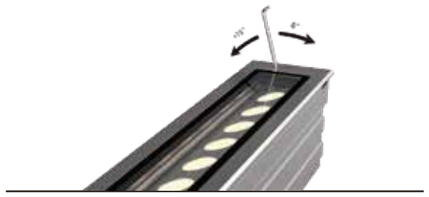



技术参数 Specification

产品型号/ Product Code	SL2311BM–10	SL2311BE–10	SL2311BD–10	SL2311BF–10	SL2311BH–10
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE XP–G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/ LED Quantity	10pcs	10pcs	10pcs	10pcs	10pcs
额定功率/ Rared Power	50W	50W	30W	50W	30W
输入电压/ Input Voltage	AC90–264V	AC90–264V	AC90–264V	AC90–264V	AC90–264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/6500K Pc Amber	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 10X30° 10X60°	20° 30° 10X30° 10X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs


Inground Light Series

SL2311C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	








技术参数 Specification

产品型号/ Product Code	SL2311CM–5	SL2311CE–5	SL2311CD–5	SL2311CF–5	SL2311CH–5
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE XP–G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/ LED Quantity	5pcs	5pcs	5pcs	5pcs	5pcs
额定功率/ Rared Power	30W	30W	20W	30W	20W
输入电压/ Input Voltage	AC100–240V	AC100–240V	AC100–240V	AC100–240V	AC100–240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/6500K Pc Amber	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 40° 60° 10X70° 5X20°		15° 20° 30° 10X30° 10X60°	20° 30° 10X30° 10X60°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	40pcs	40pcs	60pcs	40pcs	60pcs

Inground Light Series

SL2312

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

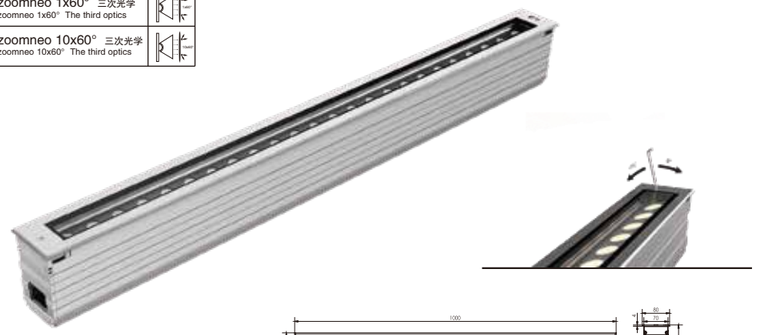



技术参数 Specification

产品型号/Product Code	SL2312B-24	SL2312B-24	SL2312A-18	SL2312B-12(0.5m)	SL2312H-24
LED品牌/LED Brand	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	OSRAM
LED数量/LED Quantity	24pcs	24pcs	18pcs	12pcs	24pcs
额定功率/Rated Power	45W	28W	21W	28W	48W
输入电压/Input Voltage	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-240V	DC24V/AC100-265V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	Single	Single	Single	Single	RGBW 4IN1
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°				20° 40° 60° 15X25° 15X60°
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3/20pcs	5/46pcs	6/60pcs	5/46pcs	3/20pcs


产品型号/Product Code	SL2312A-12(0.5m)	SL2312A-9(0.5m)	SL2312A-8(0.3m)	SL2312A-6(0.3m)	SL2312H-12(0.5m)	SL2312H-6(0.5m)
LED品牌/LED Brand	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	12pcs	9pcs	9pcs	6pcs	12pcs	6pcs
额定功率/Rated Power	14W	11W	11W	7W	24W	12W
输入电压/Input Voltage	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	Single	Single	Single	Single	RGBW 4IN1	RGBW 4IN1
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°				20° 40° 60° 15X25° 15X60°	
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	10/80pcs	13/120pcs	6/54pcs	13/120pcs	20/150pcs	12/110pcs

Inground Light Series

SL2306

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	






开孔尺寸/Cut Size: L992*W70*H100mm



开孔尺寸/Cut Size: L492*W70*H100mm

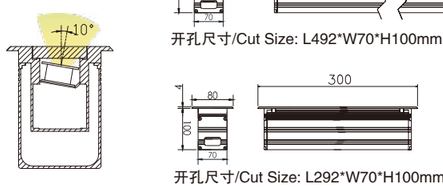

开孔尺寸/Cut Size: L292*W70*H100mm



产品简介 Product Introduction


一、埋地式条形LED洗墙灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、可调角度的光源模块，实现精准完美的投光和洗墙效果。
三、不锈钢面板；灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦，铝合金预埋件。
四、采用美国CREE原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。


1、Recessed in-ground liner LED wall washer, fashion and beautiful appearance; with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
2、Adjustable beam angle illuminant module make the effect of washing wall accurate and perfect.
3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment; Faceplate use stainless steel; Lampshade adopts high strength toughened glass, resist the impact and friction. and use aluminum alloy buried barrel.
4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification


产品型号/Product Code	SL2306A-36	SL2306A-24	SL2306A-18	SL2306A-9(0.5m)	SL2306A-6(0.3m)	SL2306-48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	6pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	7W	11W
输入电压/Input Voltage	DC24V/AC100-240V	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°					>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	30000H	30000H	30000H	30000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3/30(pcs)	5/46(pcs)	6/60(pcs)	13/120(pcs)	20/180(pcs)	13/120(pcs)
产品型号/Product Code	SL2306H-24					
LED品牌/LED Brand	CREE RGBW 4 in1					
LED数量/LED Quantity	24pcs					
额定功率/Rated Power	48W					
输入电压/Input Voltage	DC24V					
频率/Frequency Range	/					
颜色/Color	RGBW					
发光角度/Beam Angle	20° 40° 60° 15X60°					
控制方式/Control Mode	DMX512					
使用寿命/Life	30000H					
防护等级/Protection Grade	IP67					
环境温度/Ambient Temperature	-25℃~50℃					
环境湿度/Ambient Humidity	10%~90%					
串联数量/ In series(max)	3pcs					


配光曲线 (半角) Distribution Curve Flux (SBC Case)


SL2306 12.5°


SL2306 30°


SL2306 60°



SL2306 10x60°

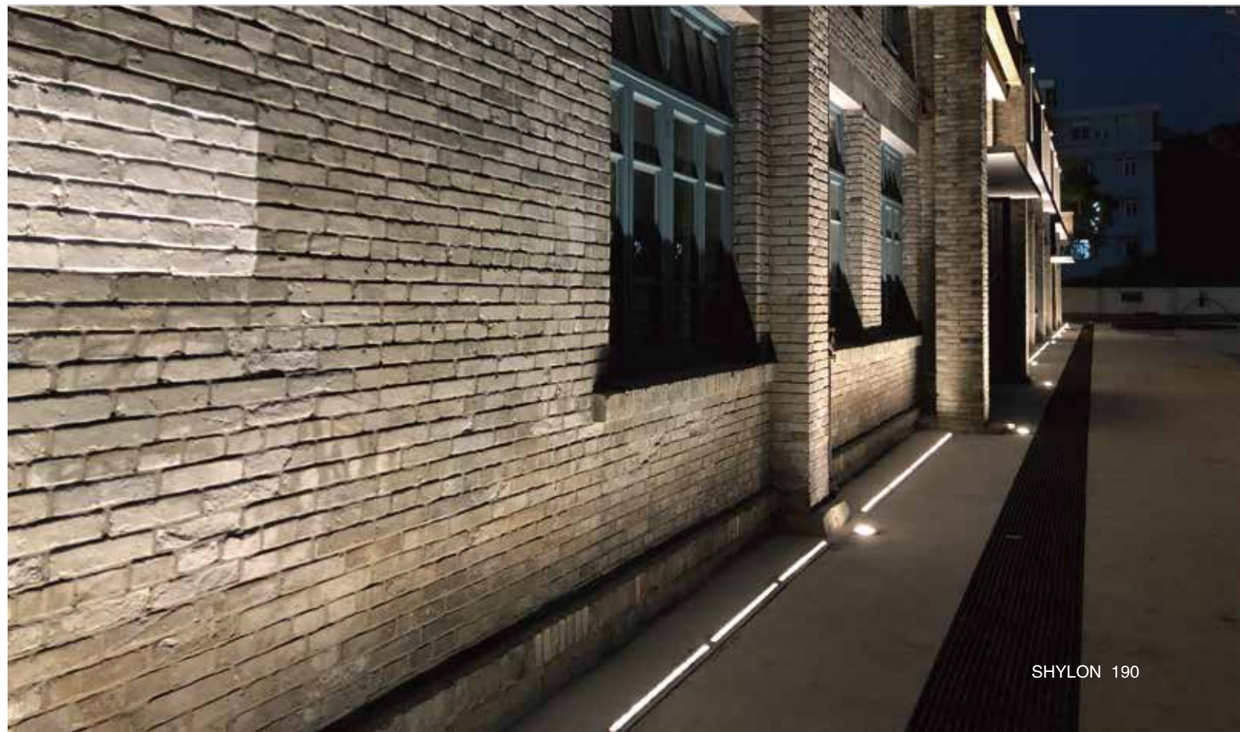



Inground Light Series

SL1307P

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

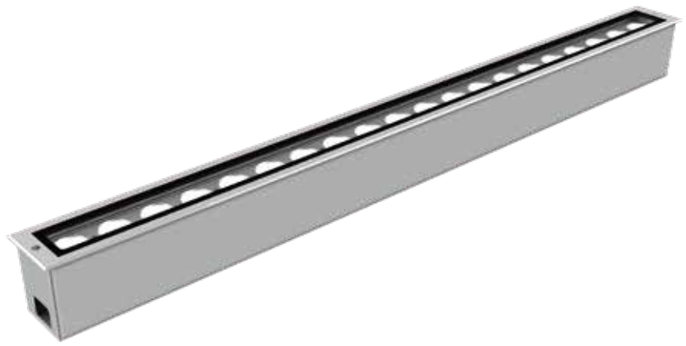

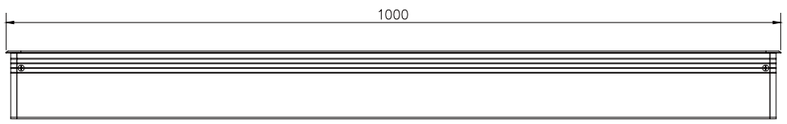



技术参数 Specification


产品型号/Product Code	SL1307PE-20	SL1307PE-10(0.5m)	SL1307PE-6(0.3m)	SL1307PF-20	SL1307PF-10(0.5m)	SL1307PF-6(0.3m)
LED品牌/LED Brand	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS	OSRAM RGBW 4in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/LED Quantity	20pcs	10pcs	6pcs	20pcs	10pcs	6pcs
额定功率/Rated Power	95W	48W	30W	100W	50W	30W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	6° 12° 20° 30° 60° 10X70° 5X20°			15° 20° 30° 10X30° 10X60°		
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3/20pcs	5/46pcs	6/60pcs	5/46pcs		

Inground Light Series

SL2307

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



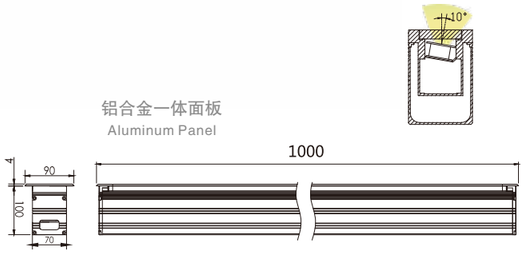


开孔尺寸/Cut Size: L992*W70*H100mm

技术参数 Specification


产品型号/Product Code	SL2307A–36	SL2307A–24	SL2307A–18	SL2307A–9(0.5m)	SL2307A–6(0.3m)	SL2307–48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	6pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	7W	11W
输入电压/Input Voltage	DC24V/AC100–240V	DC36V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°					>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	6/46(pcs)	6/60(pcs)	13/120(pcs)	20/180(pcs)	13/120(pcs)

产品型号/Product Code	SL2307H–24					
LED品牌/LED Brand	CREE CLQ6A 4in1					
LED数量/LED Quantity	24pcs					
额定功率/Rated Power	48W					
输入电压/Input Voltage	DC24V					
频率/Frequency Range	/					
颜色/Color	RGBW					
发光角度/Beam Angle	20° 40° 60° 15X60°					
控制方式/Control Mode	DMX512					
使用寿命/Life	50000H					
防护等级/Protection Grade	IP67					
环境温度/Ambient Temperature	– 25℃ ~ 50℃					
环境湿度/Ambient Humidity	10% ~ 90%					
串联数量/ In series(max)	3pcs					


配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL2307 8°



SL2307 30°




SL2307 15x30°


Inground Light Series

SL2308

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	








开孔尺寸/Cut Size: L999*W50*H87mm


技术参数 Specification

产品型号/Product Code	SL2308A–36	SL2308A–24	SL2308A–18	SL2308A–9(0.5m)	SL2308–48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	11W
输入电压/Input Voltage	DC24V	DC36V/DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60° (Tilted 10 degrees:15° 30° 45° 20X35°)				>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	7/5(pcs)	6pcs	13pcs	13pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL2308 45°



SL2308 25x45°



SL2308 10x60°




SL2308 10x70°


Inground Light Series

SL2308P

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





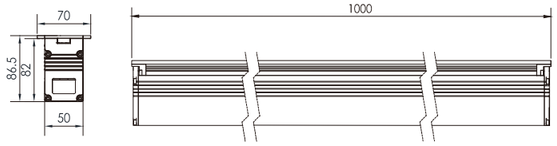

开孔尺寸/Cut Size: L999*W50*H87mm


技术参数 Specification

产品型号/Product Code	SL2308PA–36	SL2308PA–24	SL2308PA–18	SL2308PA–9(0.5m)	SL2308P–48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	11W
输入电压/Input Voltage	DC24V	DC36V/DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60° (Tilted 10 degrees:15° 30° 45° 20X35°)				>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	7/5(pcs)	6pcs	13pcs	13pcs

Inground Light Series

SL2309



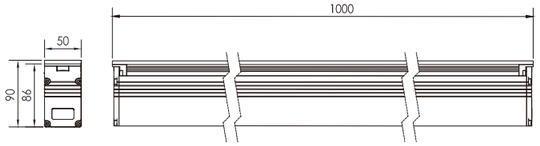

开孔尺寸/Cut Size: L999*W50*H87mm

技术参数 Specification


产品型号/Product Code	SL2309–48	SL2309–156
LED品牌/LED Brand	EPISTAR	EPISTAR
LED数量/LED Quantity	48pcs	156pcs
额定功率/Rated Power	11W	15W/10W
输入电压/Input Voltage	DC24V	DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	Single
发光角度/Beam Angle	>120°	>120°
控制方式/Control Mode	DMX512/CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP67	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3pcs	9pcs

Inground Light Series

SL2304

reddot winner 2021






技术参数 Specification

产品型号/Product Code	SL2304–288
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	288pcs
额定功率/Rated Power	15W/10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	Single/RGB
发光角度/Beam Angle	>120°
控制方式/Control Mode	CC/DMX 512
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	– 25℃~50℃
环境湿度/Ambient Humidity	10%~90%
串联数量/ In series(max)	9pcs

Inground Light Series

SL2305






技术参数 Specification

产品型号/Product Code	SL2305–156
LED品牌/LED Brand	EPISTAR
LED数量/LED Quantity	156pcs
额定功率/Rated Power	15W/10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	Single/RGB
发光角度/Beam Angle	>120°
控制方式/Control Mode	CC/DMX 512
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	– 25℃~50℃
环境湿度/Ambient Humidity	10%~90%
串联数量/ In series(max)	9pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

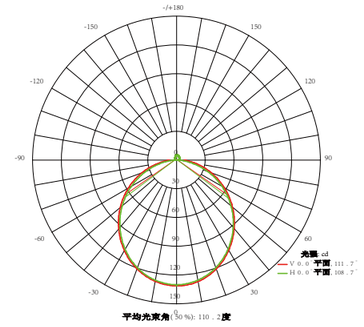

SL2305 120°




Inground Light Series


SL2270


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





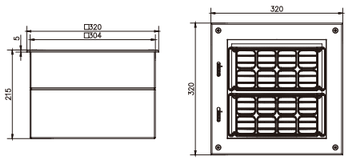





技术参数 Specification


产品型号/ Product Code	SL2270M-16	SL2270E-16	SL2270N-16	SL2270F-16	SL2270C-64	SL2270A-144
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP-L	RGBWCLA 7in1	CREE/OSRAM 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	16pcs	16pcs	16pcs	16pcs	64pcs	144pcs
额定功率/ Rared Power	120W	120W	150W	150W	120W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBWCLA	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	10° 15° 20° 30° 15X60°	15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	CC
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	26pcs	26pcs	26pcs	40pcs	26pcs	40pcs


Inground Light Series


SL2269


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	














技术参数 Specification

产品型号/ Product Code	SL2269M-9	SL2269E-9	SL2269F-9	SL2269C-36	SL2269A-81
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	36pcs	81pcs
额定功率/ Rared Power	80W	80W	90W	80W	90W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs


Inground Light Series


SL2264


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	














技术参数 Specification


产品型号/ Product Code	SL2264M-4	SL2264E-4	SL2264F-4	SL2264C-16	SL2264A-36
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	4pcs	4pcs	4pcs	36pcs	36pcs
额定功率/ Rared Power	30W	30W	40W	30W	40W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-264V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs


Inground Light Series

SL2169C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	










技术参数 Specification

产品型号/ Product Code	SL2169CM–9	SL2169CE–9	SL2169CF–9	SL2169CC–36	SL2169CA–81
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE/OSRAM XM–L 4in1	CREE XP–G3	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	36pcs	81pcs
额定功率/ Rared Power	90W	90W	90W	90W	90W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBW 4IN1	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	CC/DALI/0–10V	CC	DMX512	CC/DALI/0–10V	CC
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	14pcs	14pcs	14pcs	14pcs	14pcs

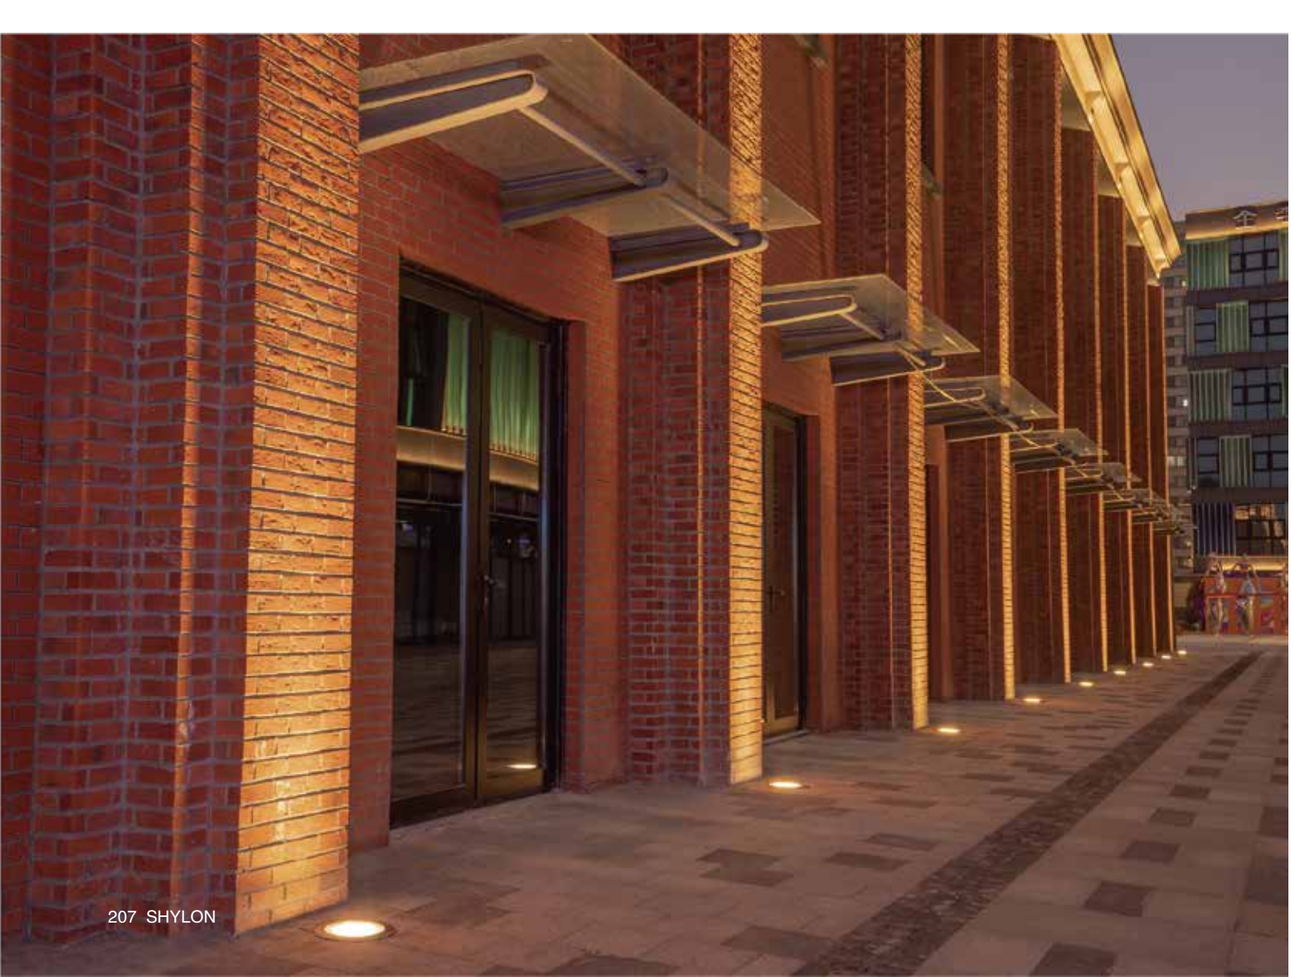


Inground Light Series


SL2166C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti–slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	









技术参数 Specification


产品型号/ Product Code	SL2166CM–6	SL2166CE–6	SL2166CF–6	SL2166CC–24	SL2166CA–54
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE/OSRAM XM–L 4in1	CREE XP–G3	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	24pcs	54pcs
额定功率/ Rared Power	50W	50W	60W	50W	60W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	DMX512/RDM	CC/DALI/0–10V	CC
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	20pcs	20pcs	20pcs	20pcs	20pcs

Inground Light Series


SL2164C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	









技术参数 Specification


产品型号/ Product Code	SL2164CM–4	SL2164CE–4	SL2164CF–4	SL2164CC–16	SL2164CA–36
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE/OSRAM XM–L 4in1	CREE XP–G3	OSRAM
LED数量/ LED Quantity	4pcs	4pcs	4pcs	16pcs	36pcs
额定功率/ Rared Power	30W	30W	40W	30W	40W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/6500K Pc Amber	Single	RGBW 4IN1	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	DMX512/RDM	CC/DALI/0–10V	DMX512
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	30pcs	30pcs	30pcs	30pcs	30pcs

Inground Light Series


SL2162C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	









技术参数 Specification


产品型号/ Product Code	SL2162CM–2	SL2162CE–2	SL2162CF–2	SL2162CC–8	SL2162CA–18
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE/OSRAM XM–L 4in1	CREE XP–G3	OSRAM
LED数量/ LED Quantity	2pcs	2pcs	2pcs	8pcs	18pcs
额定功率/ Rared Power	20W	20W	20W	20W	20W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100V–305V	AC100V–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	DMX512	CC	DMX512/RDM	CC/DALI/0–10V	DMX512
使用寿命/ Life	50000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	60pcs	60pcs	60pcs	60pcs	60pcs

Inground Light Series


SL2161C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	









技术参数 Specification

产品型号/ Product Code	SL2161CM–1	SL2161CE–1	SL2161CF–1	SL2161CC–4	SL2161CA–9
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE/OSRAM XM–L 4in1	CREE XP–G3	OSRAM
LED数量/ LED Quantity	1pcs	1pcs	1pcs	4pcs	1pcs
额定功率/ Rared Power	10W	10W	10W	10W	10W
输入电压/ Input Voltage	AC100–305V	AC100–305V	DC 24V	AC100V–305V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBW 4IN1	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	DMX512/RDM	CC/DALI/0–10V	DMX512
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	120pcs	120pcs	7pcs	120pcs	7pcs


Inground Light Series

SL2160C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







技术参数 Specification


产品型号/ Product Code	SL2160CM–1	SL2160CE–1	SL2160CF–1
LED品牌/ LED Brand	OSRAM OSTAR PRO	CREE XP–L	CREE/OSRAM XM–L 4in1
LED数量/ LED Quantity	1pcs	1pcs	1pcs
额定功率/ Rared Power	10W	10W	10W
输入电压/ Input Voltage	AC100–264V / DC12V	AC100–264V / DC12V	DC12V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/6500K/Pc Amber	Single	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 40° 60° 10X70° 5X20°	15° 20° 30° 15X60°
控制方式/ Control Mode	DMX512	CC	DMX512
使用寿命/ Life	50000H	80000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	60pcs	60pcs	60pcs

Inground Light Series


SL2152C

圆孔格栅 Round–meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti–slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	






SL2152CC–36



SL2152CB–36



产品简介 Product Introduction

一、高功率LED地埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。

二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐磨擦。

三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti–corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.

2、Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.


3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL2152 8°




SL2152 12.5°




SL2152 30°



SL2152 45°



SL2152 15x30°



SL2152 10x60°


技术参数 Specification

产品型号Product Code	SL2152CC–36	SL2152CB–36
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	36pcs	36pcs
额定功率Rated Power	72W	56W
输入电压Input Voltage	DC24V/AC100–240V	DC24V/AC100–240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°	
控制方式Control Mode	DMX512/CC	DMX512/CC
使用寿命Life	80000H	80000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	2/18(pcs)	2/22(pcs)




接线示意图 Wiring Diagram


RGB A 型

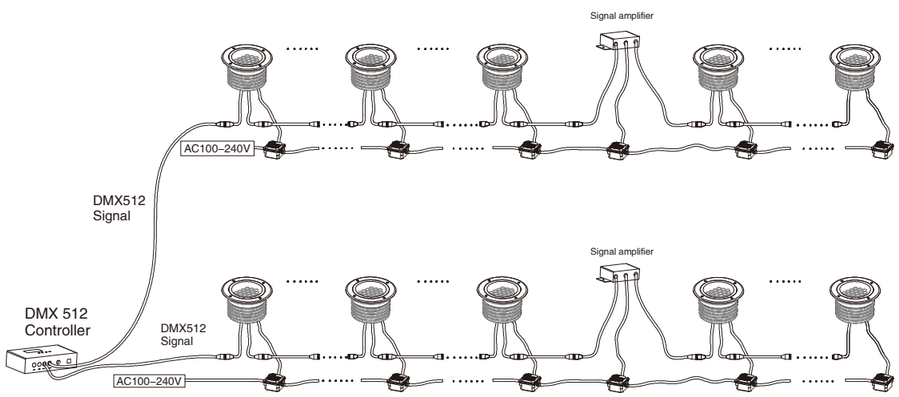

RGB B 型

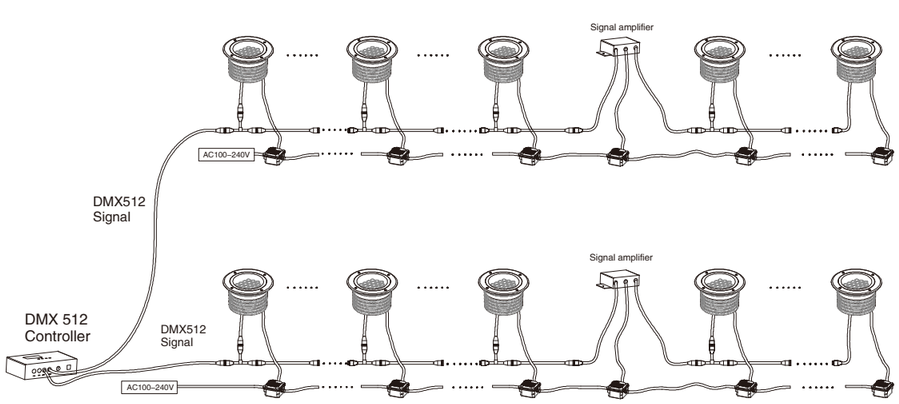

单色 (Single Color)

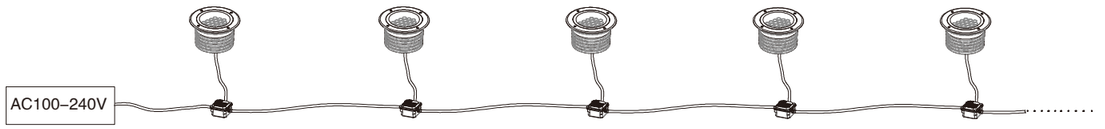


Inground Light Series

SL2150C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





产品简介 Product Introduction

一、高功率LED地埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。

二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐磨擦。

三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.

2、Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.


3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/Product Code	SL2150CE-12	SL2150CD-12	SL2150CC-24	SL2150CB-24	SL2150CF-12	SL2150CB-64
LED品牌 LED Brand	CREE	CREE	CREE	CREE	CREE RGBW 4 in 1	CREE
LED数量 LED Quantity	12pcs	12pcs	24pcs	24pcs	12pcs	64pcs
额定功率 Rated Power	60W	42W	60W	42W	100W	100W
输入电压 Input Voltage	AC100-240V	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC36V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	RGB/Single	RGB/Single	RGBW	RGBW
发光角度 Beam Angle	6° 8° 12° 20° 30° 60° 10x70°		8° 12.5° 20° 30° 45° 60° 15X30° 10X60°		15° 20° 30° 15X60°	12° 30° 55° 25X45°
控制方式 Control Mode	CC	CC	DMX512/CC	DMX512/CC	DMX512	DMX512
使用寿命 Life	80000H	80000H	80000H	80000H	80000H	80000H
防护等级 Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	22pcs	30pcs	3/22(pcs)	3/30(pcs)	1/12(pcs)	1/12(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL2150 15°




SL2150 20°




SL2150 30°



SL2150 45°



SL2150 60°



SL2150 10x60°




Inground Light Series

SL2130C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



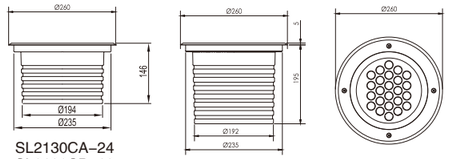

SL2130CA-24
SL2130CB-18
SL2130CA-18

SL2130CB-24

产品简介 Product Introduction

一、高功率LED地埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。

二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐磨擦。

三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


1、High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.

2、Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.


3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL2130 12.5°




SL2130 30°




SL2130 45°



SL2130 60°



SL2130 10x60°



SL2130 15x30°

技术参数 Specification

产品型号/Product Code	SL2130CB-24	SL2130CA-24	SL2130CB-18	SL2130CA-18	SL2130CF-9
LED品牌 LED Brand	CREE	CREE	CREE	CREE	CREE RGBW 4 in 1
LED数量 LED Quantity	24pcs	24pcs	18pcs	18pcs	9pcs
额定功率 Rated Power	40W	30W	30W	21W	72W
输入电压 Input Voltage	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGBW
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°				15° 20° 30° 15x60°
控制方式 Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512
使用寿命 Life	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度 Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 Ambient Humidity	10%~90%°	10%~90%°	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	5/30(pcs)	4/44(pcs)	4/44(pcs)	6/60(pcs)	2/18(pcs)





Inground Light Series


SL2128C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	












配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL2128 8°




SL2128 20°




SL2128 30°



SL2128 45°



SL2128 60°



SL2128 10x60°

技术参数 Specification

产品型号Product Code	SL2128CC-12	SL2128CA-12
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	12pcs	12pcs
额定功率Rated Power	32W	14W
输入电压Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°	
控制方式Control Mode	DMX512/CC	DMX512/CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/40(pcs)	10/90(pcs)




Inground Light Series


SL2112C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




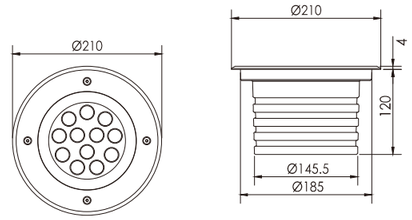


配光曲线 (半角）Distribution Curve Flux (SBC Case)




SL2112 8°




SL2112 20°




SL2112 30°



SL2112 45°



SL2112 10x60°



SL2112 15x30°

技术参数 Specification

产品型号Product Code	SL2112CB–12	SL2112CA–12
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	12pcs	12pcs
额定功率Rated Power	22W	14W
输入电压Input Voltage	DC24V/AC100–240V	DC24V/AC100–240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°	
控制方式Control Mode	DMX512/CC	DMX512/CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	6/60(pcs)	10/90(pcs)





Inground Light Series


SL2110C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	












配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL2110 8°




SL2110 20°




SL2110 30°



SL2110 45°



SL2110 60°



SL2110 15x30°

技术参数 Specification

产品型号Product Code	SL2110CC–7	SL2110CC–6
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	7pcs	6pcs
额定功率Rated Power	16W	14W
输入电压Input Voltage	AC100–240V	DC24V/AC100–240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	Single	RGB
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15X30° 10X60°	
控制方式Control Mode	CC	DMX512/CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	80pcs	10/90pcs





Inground Light Series

SL2109C


圆孔格栅 Round–meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti–slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	












SL2109C–C12


技术参数 Specification

产品型号/ Product Code	SL2109CB–9	SL2109CA–9	SL2109C–C12
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	9pcs	9pcs	1pcs
额定功率/ Rared Power	16W	11W	12W
输入电压/ Input Voltage	DC12V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
控制方式/ Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	9/80(pcs)	3/120(pcs)	12/110(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL2109 12.5°



SL2109 20°



SL2109 30°




SL2109 45°


Inground Light Series

SL2106C

圆孔格栅 Round–meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti–slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	











SL2106C–C8



技术参数 Specification


产品型号/ Product Code	SL2106CB–6	SL2106CA–6	SL2106C–C8
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	6pcs	6pcs	1pcs
额定功率/ Rared Power	12W	7W	8W
输入电压/ Input Voltage	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
控制方式/ Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	12/110(pcs)	20/180(pcs)	18/160(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL2106 8°






SL2106 12.5°






SL2106 20°






SL2106 25° Tilt.10°






SL2106 30°





SL2106 45°





SL2106 60°






Inground Light Series

SL2103C


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



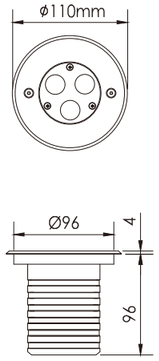




SL2103C-C6




技术参数 Specification

产品型号/ Product Code	SL2103CB-3	SL2103CA-3	SL2103C-C6
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	3pcs	3pcs	1pcs
额定功率/ Rared Power	6W	3.5W	6W
输入电压/ Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
控制方式/ Control Mode	PWM/CC	PWM/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃∽50℃	-25℃∽50℃	-25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%
串联数量/ In series(max)	12/200(pcs)	20/300(pcs)	12/200(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL2103 20°




SL2103 15x30°



Inground Light Series

SL2102





技术参数 Specification


产品型号/Product Code	SL2102A–3	SL2102C–1	
LED品牌/LED Brand	CREE	CREE	
LED数量/LED Quantity	3pcs	1pc	
额定功率/Rated Power	4W	3W	
输入电压/Input Voltage	DC24V /DC12V	DC24V/AC100–240V	
频率/Frequency Range	/	50/60Hz	
颜色/Color	RGB	Single	
发光角度/Beam Angle	120°	120°	
控制方式/Control Mode	DMX512	CC	
使用寿命/Life	50000H	50000H	
防护等级/Protection Grade	IP67	IP67	
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	



Inground Light Series

SL2101





技术参数 Specification


产品型号/Product Code	SL2101A–1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	1.5W
输入电压/Input Voltage	DC24V/AC100–240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	25° 120°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%



Inground Light Series

SL21005



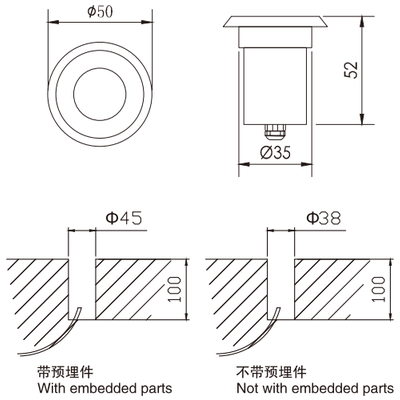

带预埋件
With embedded parts


不带预埋件
Not with embedded parts

技术参数 Specification


产品型号/Product Code	SL21005A–1	
LED品牌/LED Brand	CREE	
LED数量/LED Quantity	1pc	
额定功率/Rated Power	1.5W	
输入电压/Input Voltage	DC12V / DC24V	
频率/Frequency Range	/	
颜色/Color	RGB/Single	
发光角度/Beam Angle	12.5° 20° 30° 45° 120°	
控制方式/Control Mode	DMX512/PWM/CC	
使用寿命/Life	50000H	
防护等级/Protection Grade	IP67	
环境温度/Ambient Temperature	– 25℃ ~ 50℃	
环境湿度/Ambient Humidity	10% ~ 90%	




配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL21005 15°




SL21005 20°



SL21005 30°



SL21005 60°




SL21005 120°

Inground Light Series

SL21003



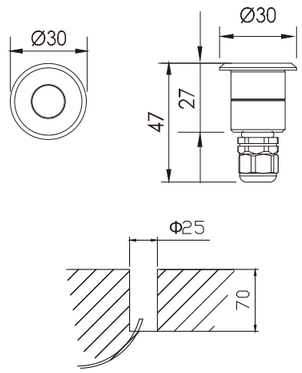


不带预埋件
Not with embedded parts

技术参数 Specification

产品型号/Product Code	SL21003A–1
LED品牌/LED Brand	EPISTAR
LED数量/LED Quantity	1pc
额定功率/Rated Power	0.5W
输入电压/Input Voltage	DC12V/DC24V
频率/Frequency Range	/
颜色/Color	Single
发光角度/Beam Angle	120°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	– 25℃~50℃
环境湿度/Ambient Humidity	10%~90%



配光曲线 (半角) Distribution Curve Flux (SBC Case)





SL21003 120°



Inground Light Series
SL2108A



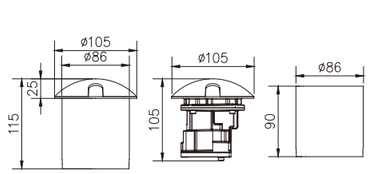

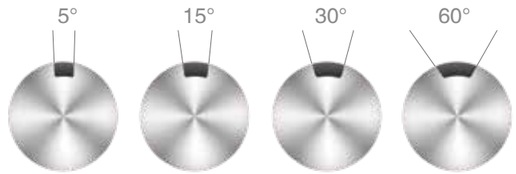



技术参数 Specification

产品型号/Product Code	SL2108AE–1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V/AC100–240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	5° 15° 30° 60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	– 25℃~50℃
环境湿度/Ambient Humidity	10%~90%

Inground Light Seri es
SL2108B



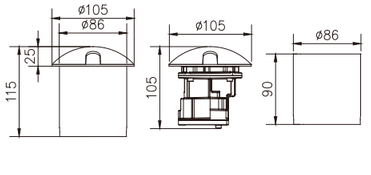

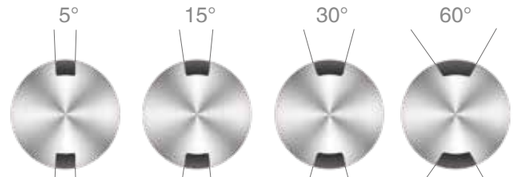


技术参数 Specification

产品型号/Product Code	SL2108BE–2
LED品牌/LED Brand	CREE
LED数量/LED Quantity	2pc
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V/AC100–240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	2X5° 2X15° 2X30° 2X60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	– 25℃~50℃
环境湿度/Ambient Humidity	10%~90%

Inground Light Series
SL2104A






技术参数 Specification

产品型号/Product Code	SL2104AB–1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	3W
输入电压/Input Voltage	DC24V/AC100–240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线（全角）Distribution Curve Flux (SBC Case)




SL2104A 60°



Inground Light Series
SL2104B






技术参数 Specification

产品型号/Product Code	SL2104BB–2
LED品牌/LED Brand	CREE
LED数量/LED Quantity	2pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100–240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	2X60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	–25℃~50℃
环境湿度/Ambient Humidity	10%~90%

配光曲线（全角）Distribution Curve Flux (SBC Case)




SL2104B 2X60°



Inground Light Series

SL2104C






技术参数 Specification

产品型号/Product Code	SL2104CB–4
LED品牌/LED Brand	CREE
LED数量/LED Quantity	4pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100–240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	4X60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线（全角）Distribution Curve Flux (SBC Case)




SL2104C 4X60°



Inground Light Series

SL2104D






技术参数 Specification

产品型号/Product Code	SL2104DB–12
LED品牌/LED Brand	CREE
LED数量/LED Quantity	4pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100–240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	12X15°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	–25℃~50℃
环境湿度/Ambient Humidity	10%~90%

配光曲线（全角）Distribution Curve Flux (SBC Case)




SL2104C 12X15°




Outline Light Series

SL3315

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

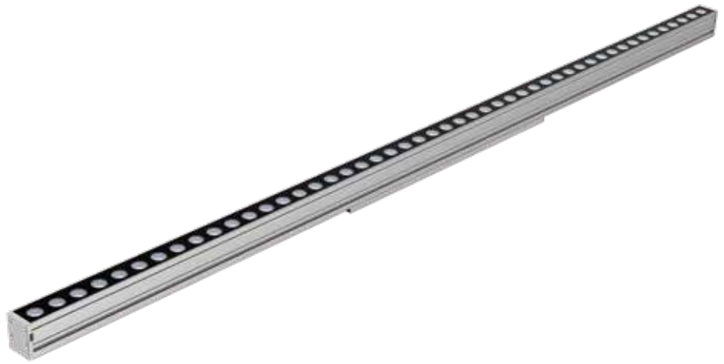


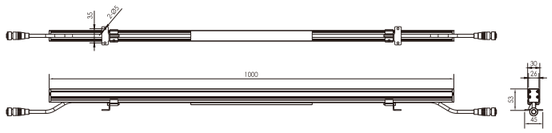


技术参数 Specification

产品型号/Product Code	SL3315–48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W/15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/RGB+W/Single
发光角度/Beam Angle	20° 30° 45° 60° 20x40° 120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL3315 30°



SL3315 25x45°




Outline light series

SL3316

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




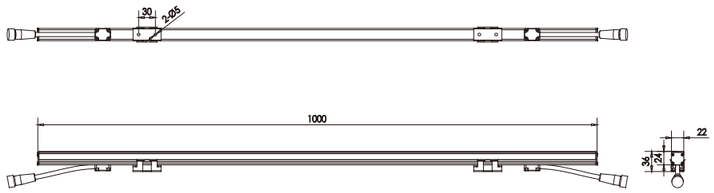

技术参数 Specification

产品型号/Product Code	SL3316–48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W/15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	30° 60° 120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)




SL3316 120°



Outline Light Series
SL3317



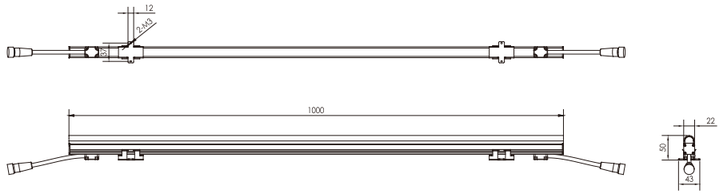

技术参数 Specification


产品型号/Product Code	SL3317–60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)

Outline light series
SL3317L

DESIGN AWARD 2021

reddot winner 2021



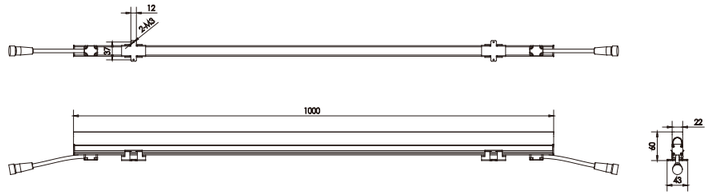



技术参数 Specification

产品型号/Product Code	SL3317L–60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)

Outline Light Series

SL3317S

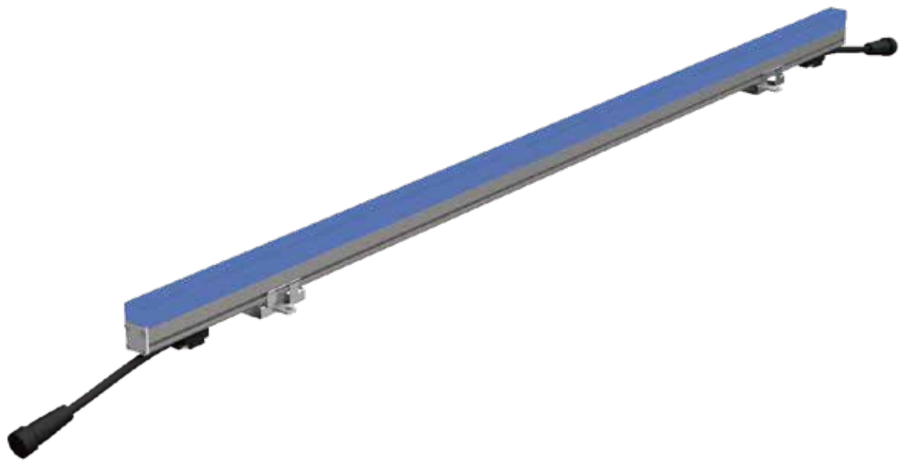

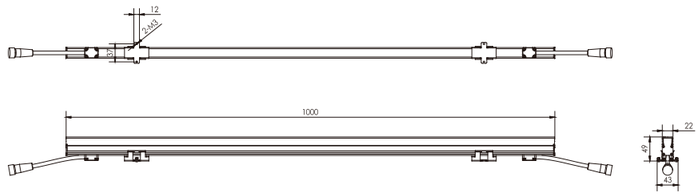


技术参数 Specification

产品型号/Product Code	SL3317S–60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)

Outline light series

SL3321

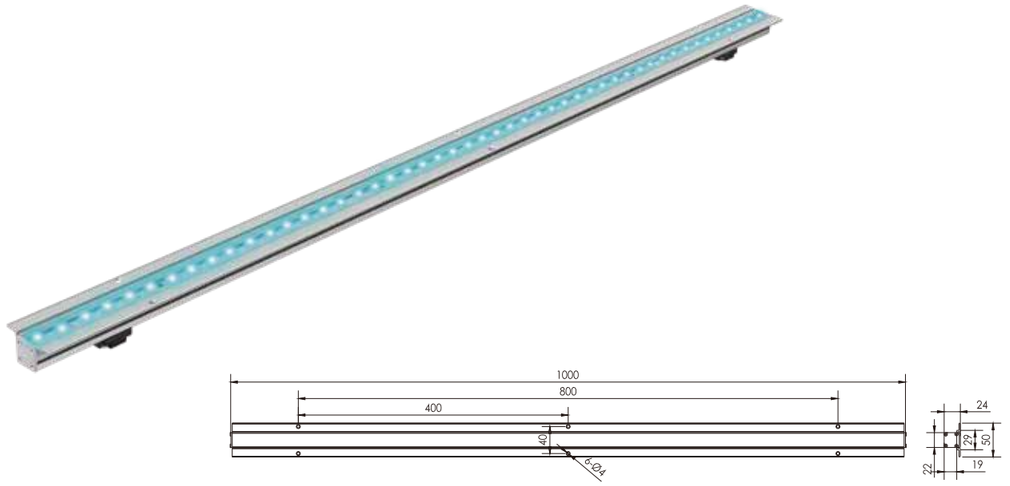


技术参数 Specification


产品型号/Product Code	SL3321–48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/Single
发光角度/Beam Angle	30° 60° 120°
控制方式/Control Model	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)



Outline Light Series

SL3322

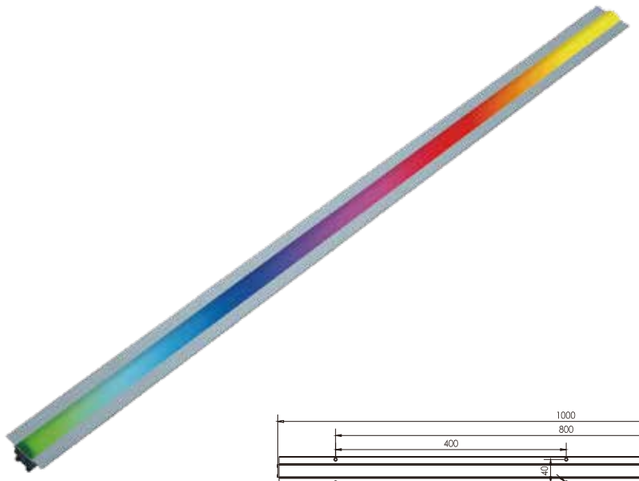




技术参数 Specification


产品型号/Product Code	SL3322–48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/Single
发光角度/Beam Angle	>120°
控制方式/Control Model	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%



Outline light series

SL3312

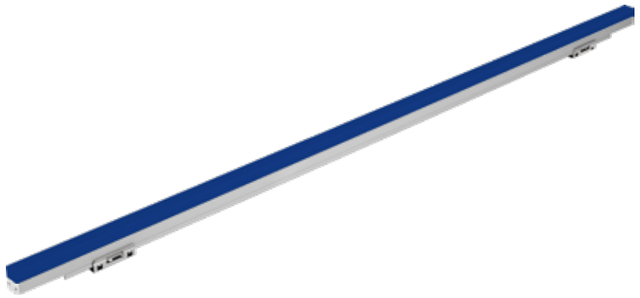

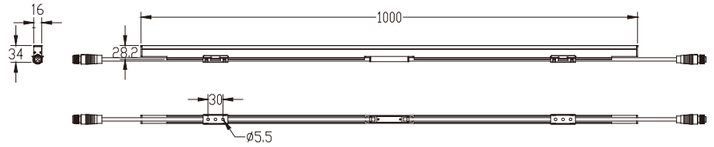


技术参数 Specification

产品型号/Product Code	SL3312–60	SL3312–30(0.5m)	SL3312–20(0.3m)	SL3312–60	SL3312–30(0.5m)	SL3312–30(0.5m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	20pcs	60pcs	30pcs	20pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	120°	120°	120°	120°	120°	120°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃		– 25℃ ~ 50℃	
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%



Outling light Series
SL3351




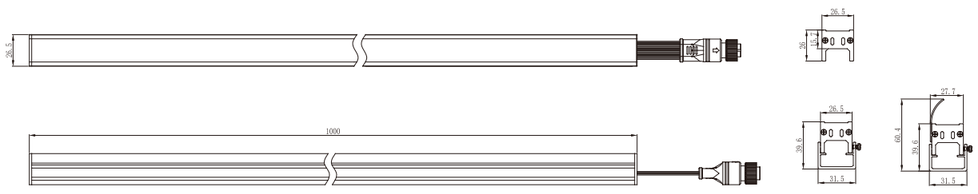


技术参数 Specification

产品型号/ Product Code	SL3351–48	SL3351–24(0.5m)	SL3351–12(0.3m)	SL3351–48	SL3351–24(0.5m)	SL3351–12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs	48pcs	24pcs	12pcs
额定功率/ Rared Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/ Beam Angle	20° 30° 45° 60° 15x40°			40° 60° 10X65° 35x45°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%	10%∽90%

Outling light Series
SL3352

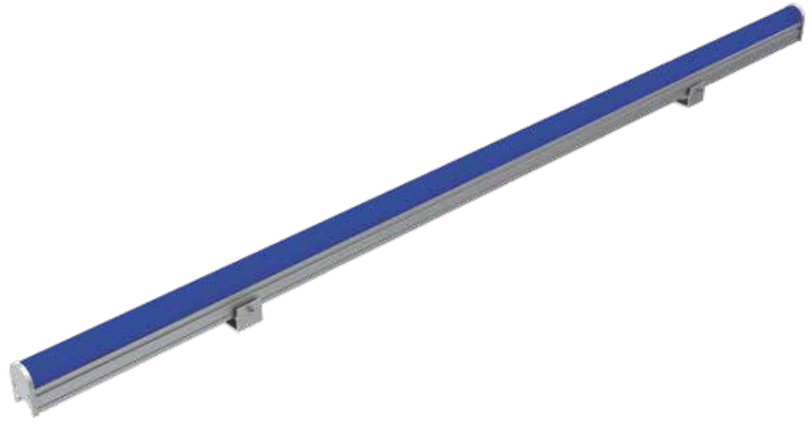


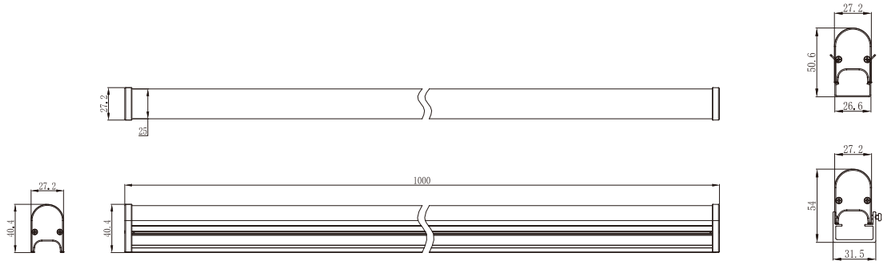


技术参数 Specification

产品型号/ Product Code	SL3352–48	SL3352–24(0.5m)	SL3352–12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rared Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	RGBW/Single	RGBW/Single	RGBW/Single
发光角度/ Beam Angle	180°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%

Outling Light Series
SL3353

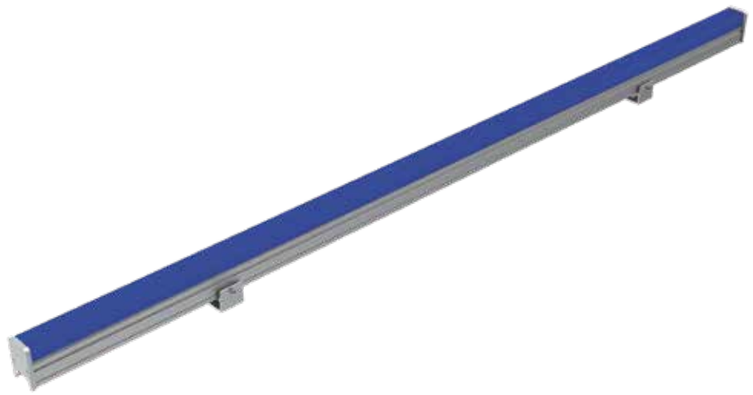

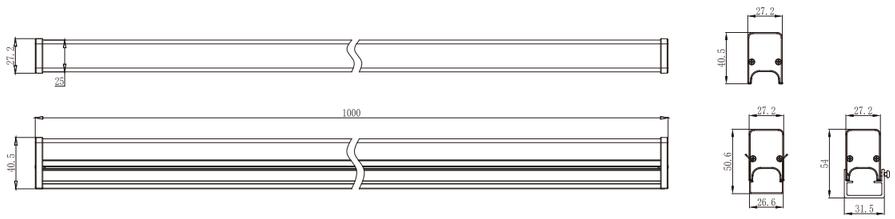


技术参数 Specification

产品型号/ Product Code	SL3353–48	SL3352–24(0.5m)	SL3353–12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rared Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	RGBW/Single	RGBW/Single	RGBW/Single
发光角度/ Beam Angle	180°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%	10%∽90%

Outling Light Series
SL3121





技术参数 Specification


产品型号/ Product Code	SL3121–9	SL3121–12
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	9pcs 6RGB3in1+3W	12pcs RGB3in1
额定功率/ Rared Power	3W	3W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V–0	UL94V–0
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%



Outling Light Series

SL3122





技术参数 Specification


产品型号/ Product Code	SL3122–9	SL3122–6
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	9pcs 6RGB3in1+3W	6pcs RGB3in1
额定功率/ Rared Power	1.8W	1.8W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V–0	UL94V–0
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%



Outling Light Series


SL3123






技术参数 Specification

产品型号/ Product Code	SL3123–4	SL3123–3
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	4pcs 3RGB3in1+1W	3pcs RGB3in1
额定功率/ Rared Power	1W	1W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V–0	UL94V–0
环境温度/ Ambient Temperature	–25℃∽50℃	–25℃∽50℃
环境湿度/ Ambient Humidity	10%∽90%	10%∽90%

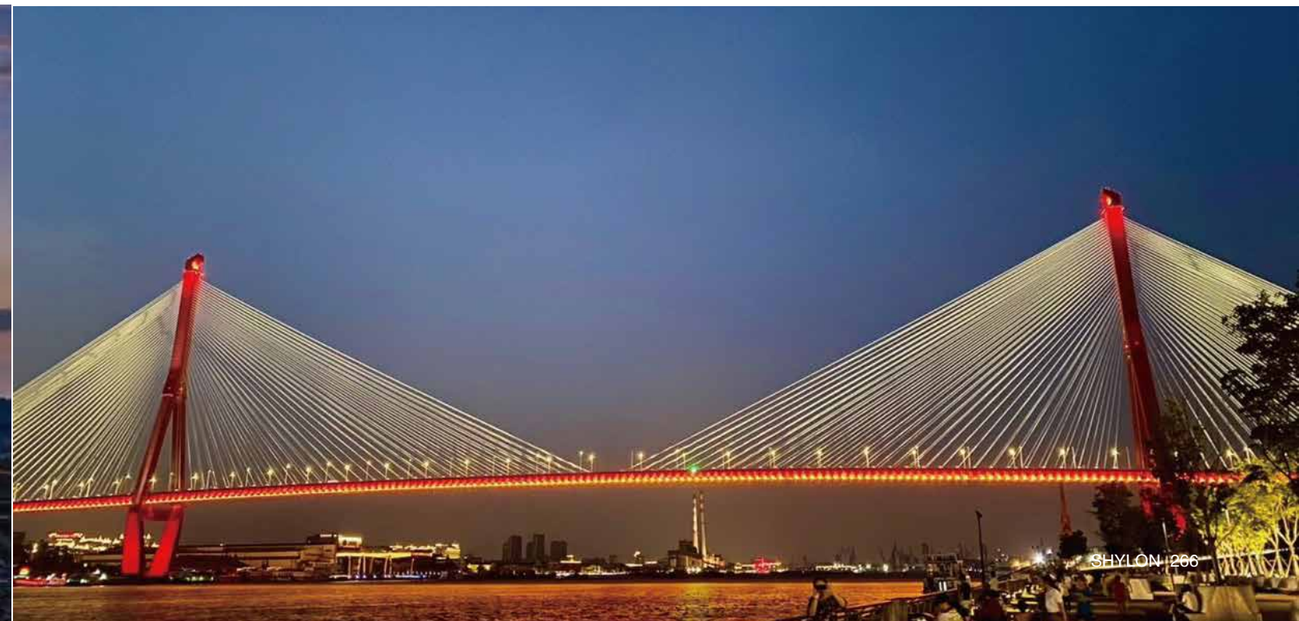






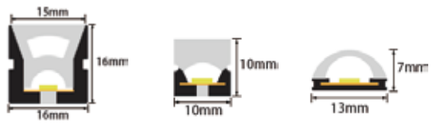

SL3361A–210　SL3361B–180　SL3361B–120

技术参数 Specification

产品型号/Product Code	SL3361A–210	SL3361B–180	SL3361B–120
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	120pcs	120pcs	120pcs
额定功率/Rated Power	18W	16W	16W
输入电压/Input Voltage	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/
颜色/Color	2700K/3000K/4000K/5000K/6000K		
发光角度/Beam Angle	>120°		
控制方式/Control Mode	CC	CC	CC
使用寿命/Life	30000H	30000H	30000H
防护等级/Protection Grade	IP67	IP67	IP67
环境温度/Ambient Temperature	– 25℃~50℃	– 25℃~50℃	– 25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%



SL3362A–120　SL3362B–144


技术参数 Specification

产品型号/Product Code	SL3362A–120	SL3362B–144	
LED品牌/LED Brand	OSRAM	OSRAM	
LED数量/LED Quantity	120pcs	144pcs	
额定功率/Rated Power	14W	10W	
输入电压/Input Voltage	DC24V	DC24V	
频率/Frequency Range	/	/	
颜色/Color	2700K/3000K/4000K/5000K/6000K		
发光角度/Beam Angle	>120°		
控制方式/Control Mode	CC	CC	
使用寿命/Life	30000H	30000H	
防护等级/Protection Grade	IP67	IP67	
环境温度/Ambient Temperature	– 25℃~50℃	– 25℃~50℃	
环境湿度/Ambient Humidity	10%~90%	10%~90%	

Outline light series

SL3110



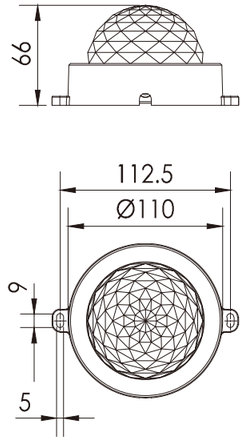

产品简介 Product Introduction

一、LED点光源系列具有时尚简约的外形，加大的散热结构设计，充分保证LED的稳定性和长寿命。
二、采用双重防水结构，简易的安装方式，满足多种场合的户外工程应用。
三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用光扩散PC或高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
四、采用SMD 单色或3合1 LED光源；光更柔和、色彩绚丽。
五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

1、LED point light series have fashionable and simple appearance, with the design of increasing heat dissipation to fully ensure the stability and long life-span of LED fixture.
2、Adopt double waterproof structure and easy installation ways meet the various occasions demands for outdoor projects.
3、Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability
4、Adopt SMD single color or 3in1 light source, make the light result much beautiful.
5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing


技术参数 Specification

产品型号/Product Code	SL3110B-3	SL3110A-3
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	3pcs	3pcs
额定功率/Rated Power	6W	3.5W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	>120°	>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%
串联数量/ In series(max)	16/140(pcs)	26/250(pcs)

Outline Light Series

SL3106



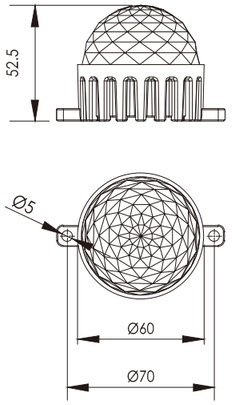


技术参数 Specification


产品型号/Product Code	SL3106C-1	SL3106-9
LED品牌/LED Brand	CREE	EPISTAR
LED数量/LED Quantity	1pc	9pcs
额定功率/Rated Power	3W	2W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	Single	Single
发光角度/Beam Angle	>120°	>120°
控制方式/Control Mode	CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%



Outline light series

SL3210

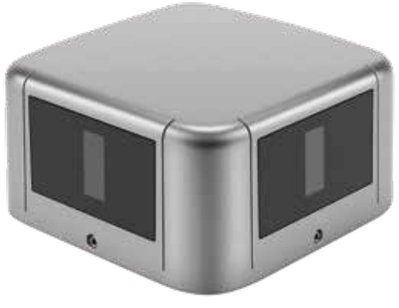




技术参数 Specification


产品型号/Product Code	SL3210R–12	SL3210B–4	SL3210B–2
LED品牌/LED Brand	CREE	CREE	CREE
LED数量/LED Quantity	12pcs	4pcs	2pcs
额定功率/Rated Power	14W	8W	4W
输入电压/Input Voltage	DC24V	DC24V/AC100–240V	DC24V/AC100–240V
频率/Frequency Range	/	50/60Hz	50/60Hz
颜色/Color	RGB	Single	Single
发光角度/Beam Angle	2° 20° 30° 60°		
控制方式/Control Mode	DMX512	CC	CC
使用寿命/Life	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65
环境温度/Ambient Temperature	– 25℃~50℃	– 25℃~50℃	– 25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%

配光曲线（全角）Distribution Curve Flux (SBC Case)



SL3210 4x2°





SL3210 30°







Outline light series

SL3240





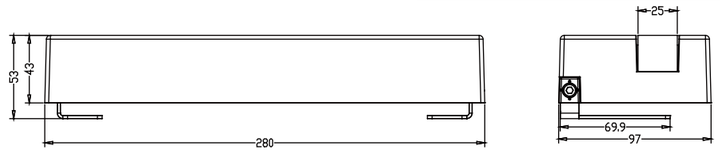


技术参数 Specification

产品型号/Product Code	SL3240C–16	SL3240C–16
LED品牌/LED Brand	LUMILEDS	LUMILEDS
LED数量/LED Quantity	16pcs	16pcs
额定功率/Rated Power	36W	36W
输入电压/Input Voltage	AC100–240V	DC24V
频率/Frequency Range	50/60Hz	/
颜色/Color	Single	RGBW
发光角度/Beam Angle	2° X 120°	2° X 120°
控制方式/Control Mode	CC	DMX512
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	8(pcs)	8(pcs)

Outline light series

SL3230




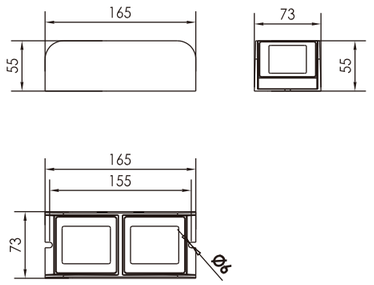

技术参数 Specification

产品型号/Product Code	SL3230C–8
LED品牌/LED Brand	CREE
LED数量/LED Quantity	8pcs
额定功率/Rated Power	20W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGBW/Single
发光角度/Beam Angle	8X120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线（全角）Distribution Curve Flux (SBC Case)




SL3230 8X120°

Outline Light Series

SL3220



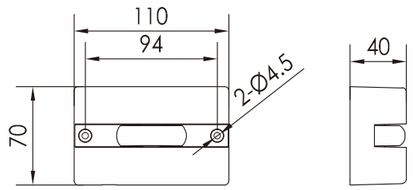

技术参数 Specification


产品型号/Product Code	SL3220A–3	SL3220C–1
LED品牌/LED Brand	CREE	CREE XP–G2
LED数量/LED Quantity	3pcs / 12pcs	1pcs
额定功率/Rated Power	3W	3W
输入电压/Input Voltage	AC100–240V/DC12V	AC100–240V/DC24V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGBW/Single	Single
发光角度/Beam Angle	2° X 120°	
控制方式/Control Mode	DMX512/CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%



Underwater Light Series

SL5109



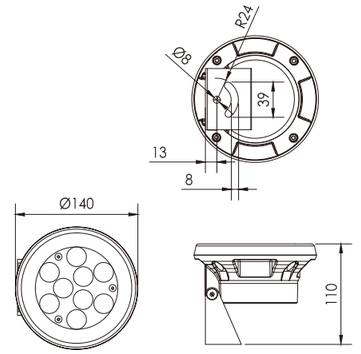

技术参数 Specification


产品型号/Product Code	SL5109B–9	SL5109A–9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	16W	10W
输入电压/Input Voltage	DC12V/DC24V	DC12V/DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/9(pcs)	7/14(pcs)



Underwater Light Series

SL5106




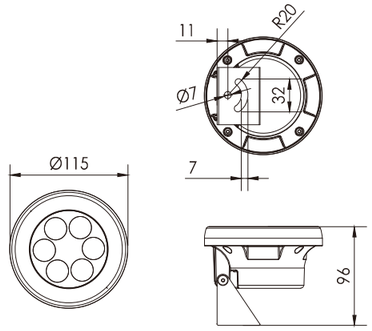


技术参数 Specification

产品型号/Product Code	SL5106B–6	SL5106A–6
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	6pcs	6pcs
额定功率/Rated Power	12W	7W
输入电压/Input Voltage	DC12V/DC24V	DC12V/DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	6/12(pcs)	10/20(pcs)

配光曲线 (全角) Distribution Curve Flux (SBC Case)




SL5106 20°




SL5106 30°

接线示意图 Wiring Diagram

RGB B 型

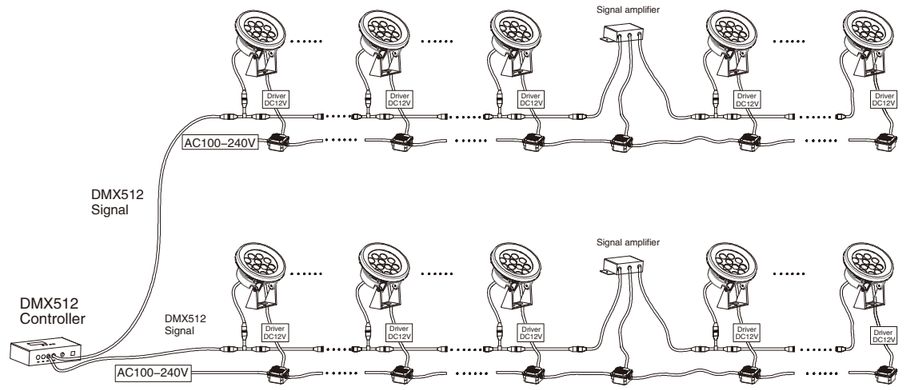


单色 (Single Color)

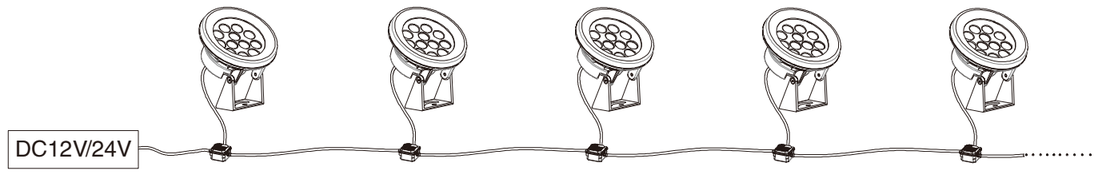



Underwater Light Series
SL5119






技术参数 Specification

产品型号/Product Code	SL5119B–9	SL5119A–9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	16W	10W
输入电压/Input Voltage	DC12V /DC24V	DC12V /DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/9(pcs)	7/14(pcs)



Underwater Light Series
SL5116




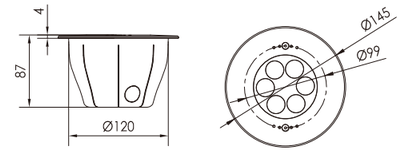


技术参数 Specification

产品型号/Product Code	SL5116B–6	SL5116A–6
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	6pcs	6pcs
额定功率/Rated Power	12W	7W
输入电压/Input Voltage	DC12V /DC24V	DC12V /DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	6/22(pcs)	10/20(pcs)

配光曲线（半角）Distribution Curve Flux (SBC Case)



SL3351-48 12W 4000K 15X40D




SL3353-48 12W 4000K 120D

Wall light series

SL6155



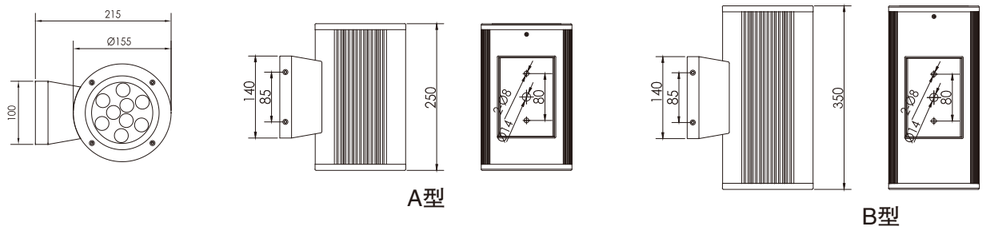

产品简介 Product Introduction


一、拥有自主知识产权的原创设计,外型时尚美观；采用独特的腔体结构，比传统的灯体散热面积增加120%，充分保证LED的稳定性和长寿命。
二、全新的密封方式使灯具有良好的防水性能,满足多种场合的户外工程应用。
三、灯体采用高强度铝合金成型，表面静电喷塑处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好。

1、Patent owned design, fashionable and beautiful appearance, adopt unique body structure, increase 120% heat dissipation square, that fully ensure the stability and long lifespan of LED.
2、All new sealing way make the light has better waterproof performance, can meet the various occasions demands for outdoor projects.
3、The light body adopts high pressure aluminum alloy molding, surface with electrostatic plastic coating, lampshade adopts high strength toughened glass, resist the impact and friction.
4、Adopt American CREE original LED light source, high flus output, excellent intensity of light color.


技术参数 Specification

产品型号/Product Code	SL6155B–18	SL6155A–18
发光方向 Light direction	Up and down	Up and down
LED品牌 LED Brand	CREE	CREE
LED数量 LED Quantity	18pcs	18pcs
额定功率 Rated Power	36W	21W
输入电压 Input Voltage	AC100–240V	AC100–240V
频率 Frequency Range	50/60Hz	50/60Hz
颜色 Color	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°	
控制方式 Control Mode	CC	CC
使用寿命 Life	50000H	50000H
防护等级 Protection Grade	IP66	IP66
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%


配光曲线（全角）Distribution Curve Flux (SBC Case)




SL6155 8°




SL6155 12.5°




SL6155 20°




SL6155 30°




SL6155 45°



SL6155 60°



SL6155 10x60°




SL6155 15x30°

Wall Light Series

SL6156




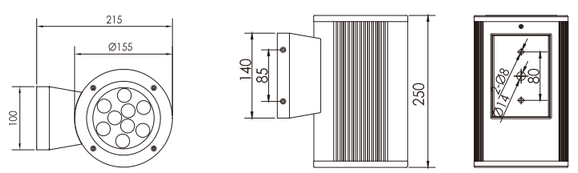


技术参数 Specification

产品型号/Product Code	SL6156B–9	SL6156A–9	SL6156–C20
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	9pcs	9pcs	1pc
额定功率 Rated Power	16W	11W	26W
输入电压 Input Voltage	AC100–240V	AC100–240V	AC100–240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		15°
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)



SL6156 15°




SL6156 20°

Wall Light Series

SL6157



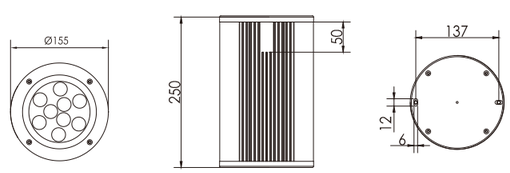

技术参数 Specification


产品型号/Product Code	SL6157B–9	SL6157A–9	SL6157–C20
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	9pcs	9pcs	1pc
额定功率 Rated Power	16W	11W	26W
输入电压 Input Voltage	AC100–240V	AC100–240V	AC100–240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		15°
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%



Wall light series

SL6122



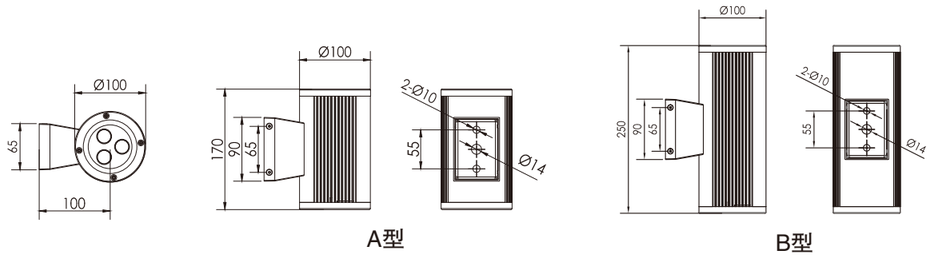


技术参数 Specification


产品型号Product Code	SL6122C–6	SL6122A–6
发光方向 Light direction	Up and down	Up and down
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	6pcs	6pcs
额定功率Rated Power	16W	8W
输入电压Input Voltage	AC100–240V	AC100–240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45°	
控制方式Control Mode	CC	CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP66	IP66
环境温度Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%




配光曲线 (全角) Distribution Curve Flux (SBC Case)




SL6122 8°




SL6122 12.5°




SL6122 20°



SL6122 30°



SL6122 45°




SL6122 60°

Wall Light Series

SL6123




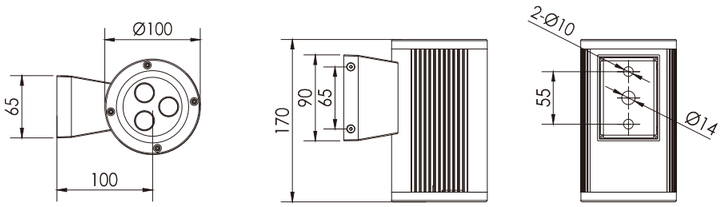


技术参数 Specification

产品型号/Product Code	SL6123C–3	SL6123A–3	SL6123–C10
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	3pcs	3pcs	1pc
额定功率 Rated Power	8W	3.5W	10W
输入电压 Input Voltage	AC100–240V	AC100–240V	AC100–240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		15°
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)



SL6123 12.5°




SL6123 20°

Wall Light Series

SL6125




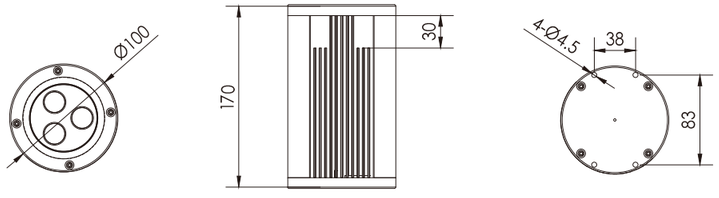


技术参数 Specification

产品型号/Product Code	SL6125C–3	SL6125A–3	SL6125–C10
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	3pcs	3pcs	1pc
额定功率 Rated Power	8W	3.5W	10W
输入电压 Input Voltage	AC100–240V	AC100–240V	AC100–240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		15°
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)



SL6125 36°



SL6125 45°

Road Light Series

SL7500



产品简介 Product Introduction

一、独创的流体雕塑式灯体结构,卡扣式开启, 内置快速插拔连接器,开盖后自动断电,安装维护方便安全。

二、灯体采用高强度压铸铝材料，表面氟碳喷涂处理；灯罩采用透光率94%的高性能钢化玻璃。

三、采用美国CREE大功率LED光源,高光通量输出,光色一致性优良; 具有多种透镜角度可选，合理控制光的分布，保证理想的路面亮度及均匀度。

四、输入电压100–305V AC，驱动电源效率高达93%, 防雷击6KV; 内置主动式功率因数效正，功率因数大于0.95; 电源内建PWM恒流技术，效率高，热量低，恒流精度高。

五、可加装防雷保护模块, 防浪涌电流高达20KA。

1、The luminaire is shaped as original fluid sculpture ,designed to lift up by snapping, and in–built quick plug connector. The luminaire enables to switch off automatically after removing the lid, which keeps the installation and maintenance secure and convenient.

2、The housing is high strength die–casting aluminum, the appearance with fluorine carbon spraying; diffuser is high–performance tempered glass which owns 94% light transmittance.

3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; provide types of optional beam angle, control the light distribution rationally, ensure street surface with ideal brightness and uniformity.


4、The diver in– built which owns power efficiency as high as 93% is with the input voltage 100–305V AC and 6KV lightning stroke resistance, in–built active power factor with correction surpasses 0.95; Construct PWM constant current technology internal with the performance of high efficiency, low heat and superior precision of constant current.

5、Support the installation of lightning protection module which can prevent the luminaire from attack of surge as high as 20KA.

技术参数 Specification

产品型号/ Product Code	SL7500–M235	SL7500–M200	SL7500–M180	SL7500–M150	SL7500–C215
Led品牌/ Led Brand	LUMILEDS	LUMILEDS	LUMILEDS	LUMILEDS	CREE
Led数量/ Led Quantity	80pcs	64pcs	64pcs	48pcs	80pcs
额定功率/ Rared Power	235W	205W	180W	155W	215W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120X50° 150X65° 150X60° 140X30° 148°				
控制方式/ Control Mode	CC / PLC / Zigbee / Light–operated control				
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

产品型号/ Product Code	SL7500–C180	SL7500–C150	SL7500–M235HE	SL7500–M200HE
Led品牌/ Led Brand	CREE	CREE	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	80pcs	80pcs	117Pcs	96Pcs
额定功率/ Rared Power	180W	150W	235W	235W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K		3000K4000K/5000K/6000K	
发光角度/ Beam Angle	120X50° 150X65° 150X60° 140X30° 148°		150X60° 90°	
控制方式/ Control Mode	CC / PLC / Zigbee / Light–operated control		CC / PLC/ zigbee / Light–operated control	
使用寿命/ Life	80000H	80000H	80000H	80000H
功率因数/Power Factor	>0.95	>0.95	>0.95	>0.95
防浪涌电压/Surge Voltage	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

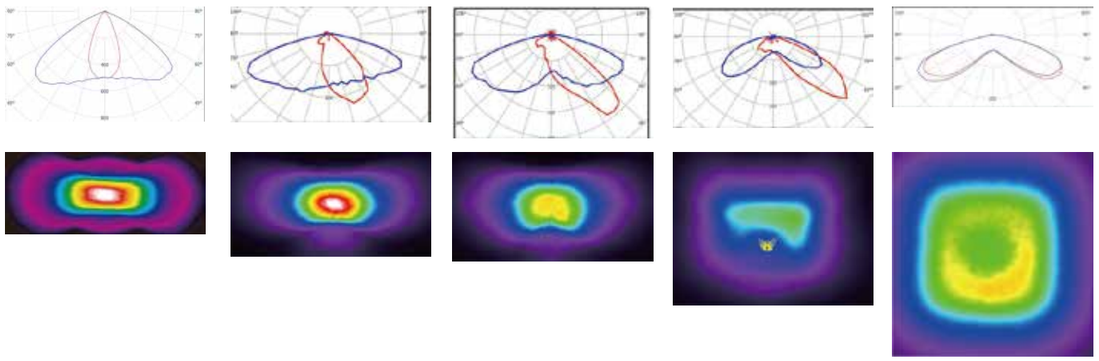



Road Light Series

SL7501






技术参数 Specification


产品型号/ Product Code	SL7501–M155	SL7501–M125	SL7501–M105	SL7501–M80	SL7501–C135
Led品牌/ Led Brand	LUMILEDS	LUMILEDS	LUMILEDS	LUMILEDS	CREE
Led数量/ Led Quantity	48pcs	48pcs	32pcs	32pcs	48pcs
额定功率/ Rared Power	155W	125W	105W	80W	135W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120X50° 150X65° 150X60° 140X30° 148°				
控制方式/ Control Mode	CC / PLC / Zigbee / Light–operated control				
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

产品型号/ Product Code	SL7501–C110	SL7501–C80	SL7501–M150HE	SL7501–M125HE
Led品牌/ Led Brand	CREE	CREE	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	48pcs	36pcs	72Pcs	70Pcs
额定功率/ Rared Power	110W	80W	155W	125W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K			
发光角度/ Beam Angle	120X50° 150X65° 150X60° 140X30° 148°		150X60° 90°	
控制方式/ Control Mode	CC / PLC / Zigbee / Light–operated control		CC / PLC/ Zigbee / Light–operated control	
使用寿命/ Life	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

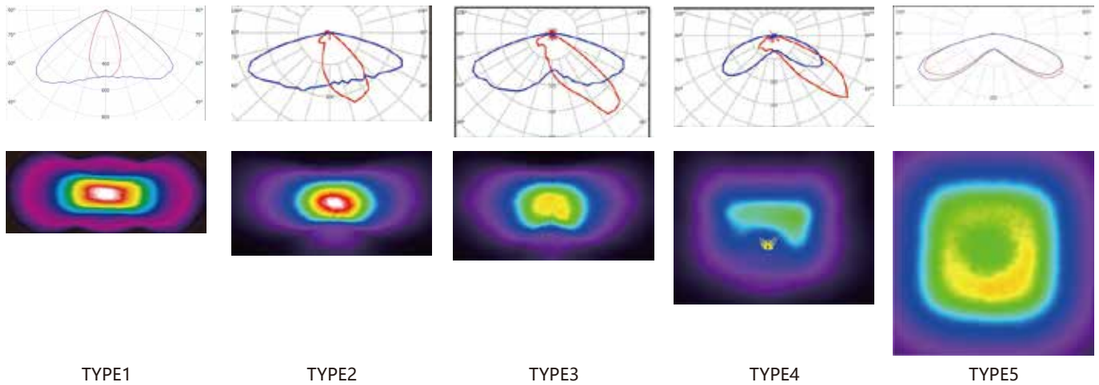

TYPE1 TYPE2 TYPE3 TYPE4 TYPE5

SL7500/SL7501/SL7502/SL7503

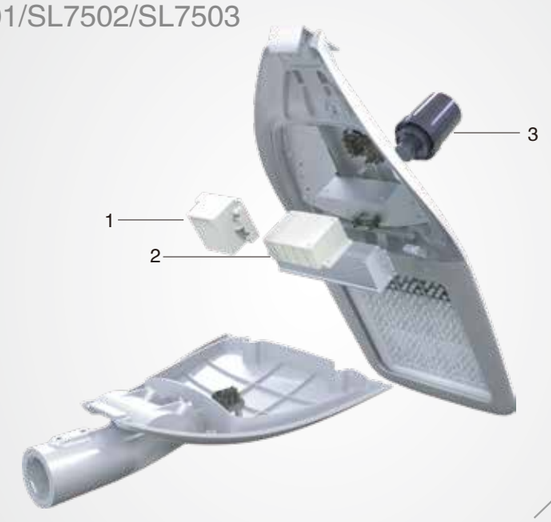


可选配件 Optional Accessories

3. Zigebee 无线控制模块
Zigebee Wireless Control Module

2. PLC 单灯控制器
PLC Controller

1.防雷器
SPD

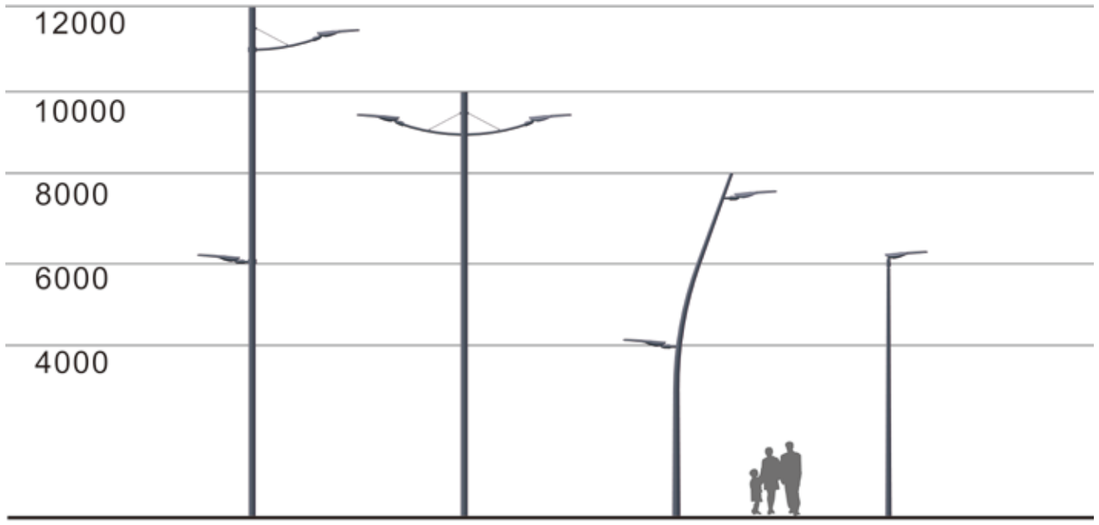


Road Light Series

SL7502









技术参数 Specification

产品型号/ Product Code	SL7502–M110	SL7502–M80	SL7502–C80	SL7502–M110HE	SL7502–M80HE
Led品牌/ Led Brand	LUMILEDS	LUMILEDS	CREE	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	36pcs	24pcs	36pcs	54pcs	42pcs
额定功率/ Rared Power	105W	80W	80W	110W	80W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120X50° 150X65° 150X60° 140X30° 148°			150X60° 90°	
控制方式/ Control Mode	CC / PLC/ zigbee / Light–operated control			CC / PLC/ zigbee / Light–operated control	
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

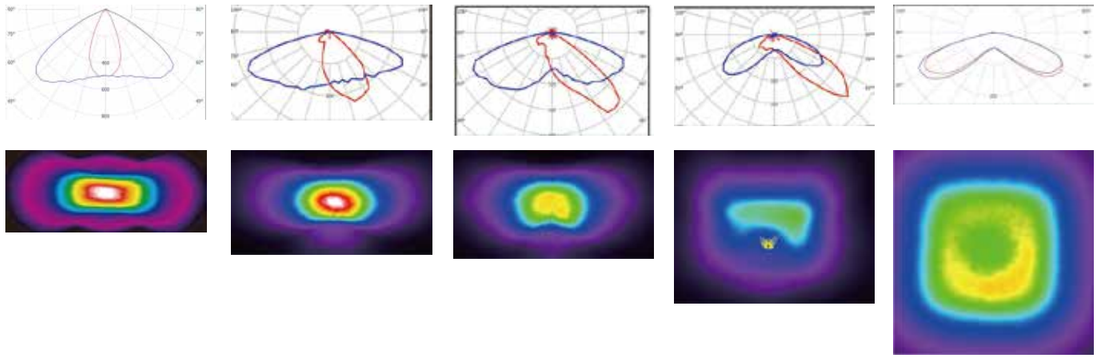


TYPE1 TYPE2 TYPE3 TYPE4 TYPE5

配光曲线 (全角) Distribution Curve Flux (SBC Case)

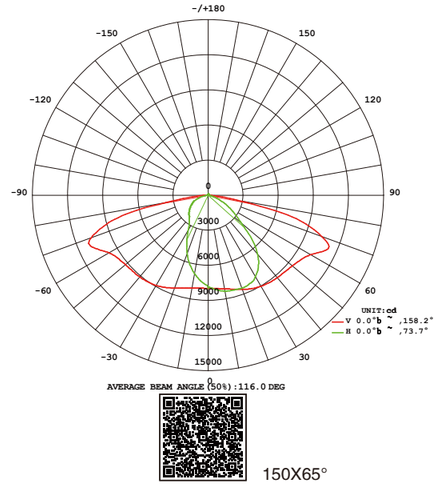

150X65°

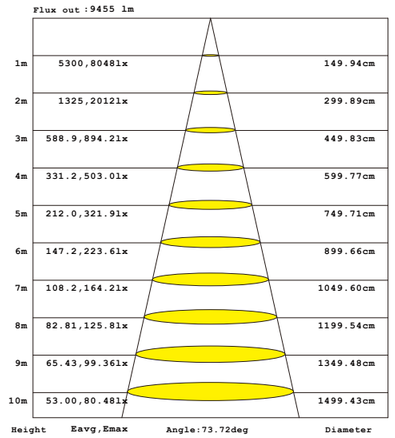

Road Light Series


SL7503






技术参数 Specification

产品型号/ Product Code	SL7503–M60	SL7503–C60	SL7503–M60HE
Led品牌/ Led Brand	LUMILEDS	CREE	LUMILEDS
Led数量/ Led Quantity	24pcs	24pcs	42pcs
额定功率/ Rared Power	60W/40W	60W	60W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K		
发光角度/ Beam Angle	120X50° 150X65° 150X60° 140X30° 148°		150X60° 90°
控制方式/ Control Mode	CC / PLC/ zigbee / Light–operated control		
使用寿命/ Life	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

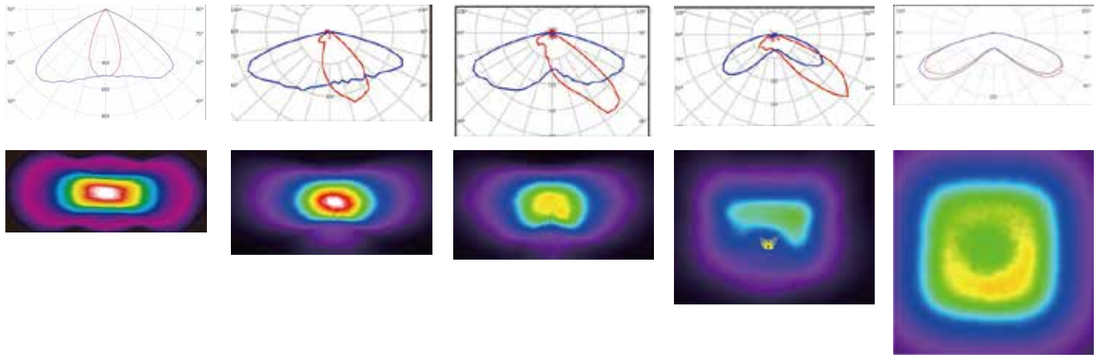


TYPE1 TYPE2 TYPE3 TYPE4 TYPE5

配光曲线 (全角) Distribution Curve Flux (SBC Case)

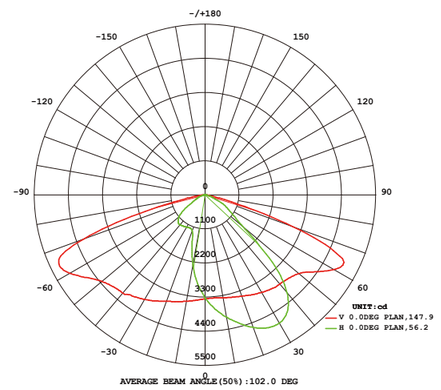


150X65°

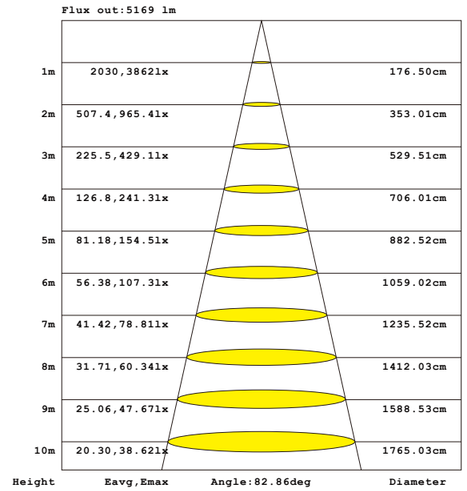

LED Highbay Light Series

SL0180U



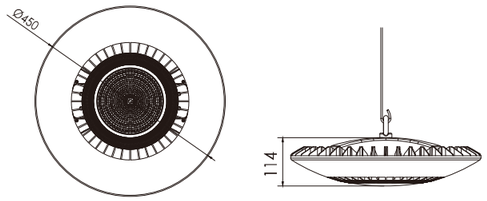


产品简介 Product Introduction

一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命.
二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光
五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能.

1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0180U–200	SL0180U–150
LED品牌/LED Brand	CREE / LUMILEDS	CREE / LUMILEDS
LED数量/LED Quantity	64Pcs	48Pcs
额定功率/Rated Power	208W	155W
输入电压/Input Voltage	AC100–305V	AC100–305V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI	CC/0–10V Dimming/DALI
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%

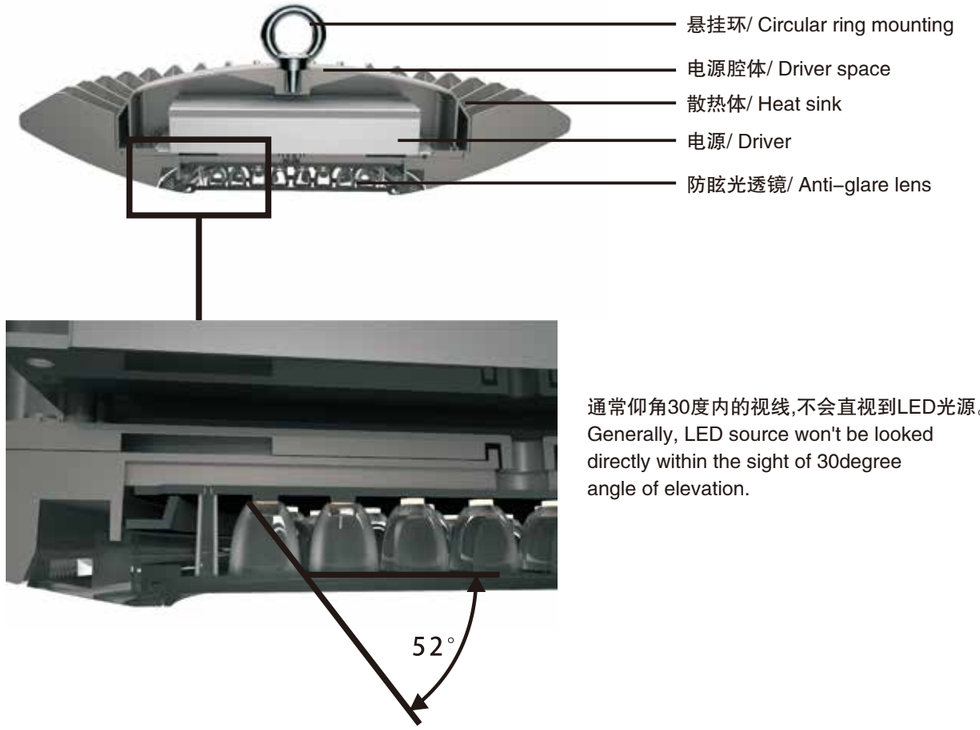


通常仰角30度内的视线,不会直视到LED光源。
Generally, LED source won't be looked directly within the sight of 30degree angle of elevation.

LED Highbay Light Series

SL0180C



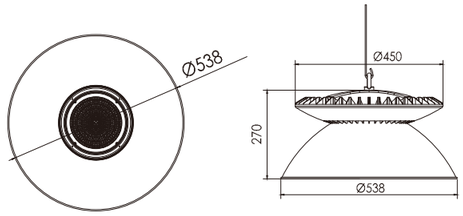

产品简介 Product Introduction


一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命.
二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光
五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能.

1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.


技术参数 Specification

产品型号/Product Code	SL0180C–200	SL0180C–150
LED品牌/LED Brand	CREE / LUMILEDS	CREE / LUMILEDS
LED数量/LED Quantity	64Pcs	48Pcs
额定功率/Rated Power	208W	155W
输入电压/Input Voltage	AC100–305V	AC100–305V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI	CC/0–10V Dimming/DALI
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

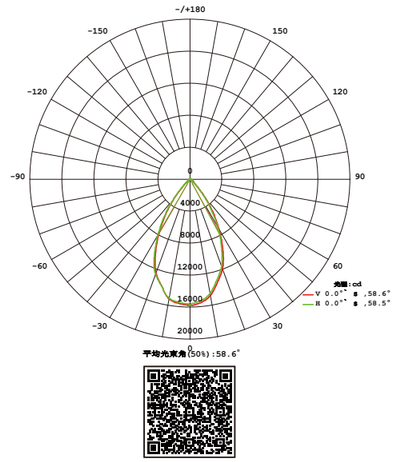

SL0180 60°

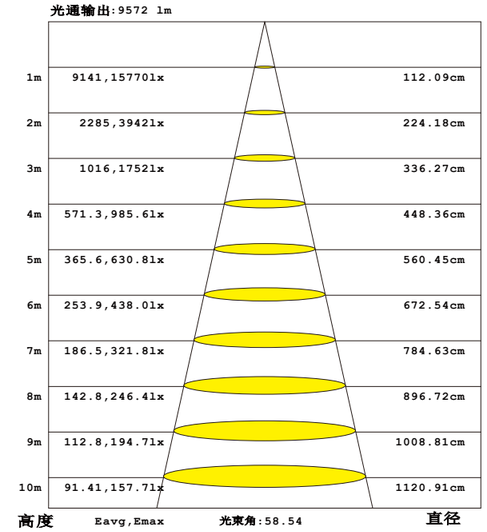




LED Highbay Light Series

SL0181U



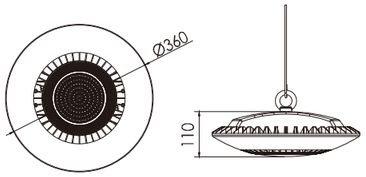

技术参数 Specification

产品型号/Product Code	SL0181U-110
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	33Pcs
额定功率/Rated Power	110W
输入电压/Input Voltage	AC100-305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

产品简介 Product Introduction

一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命.

二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W

三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.

四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光

五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能.


1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.

2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W

3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.

4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.


5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.

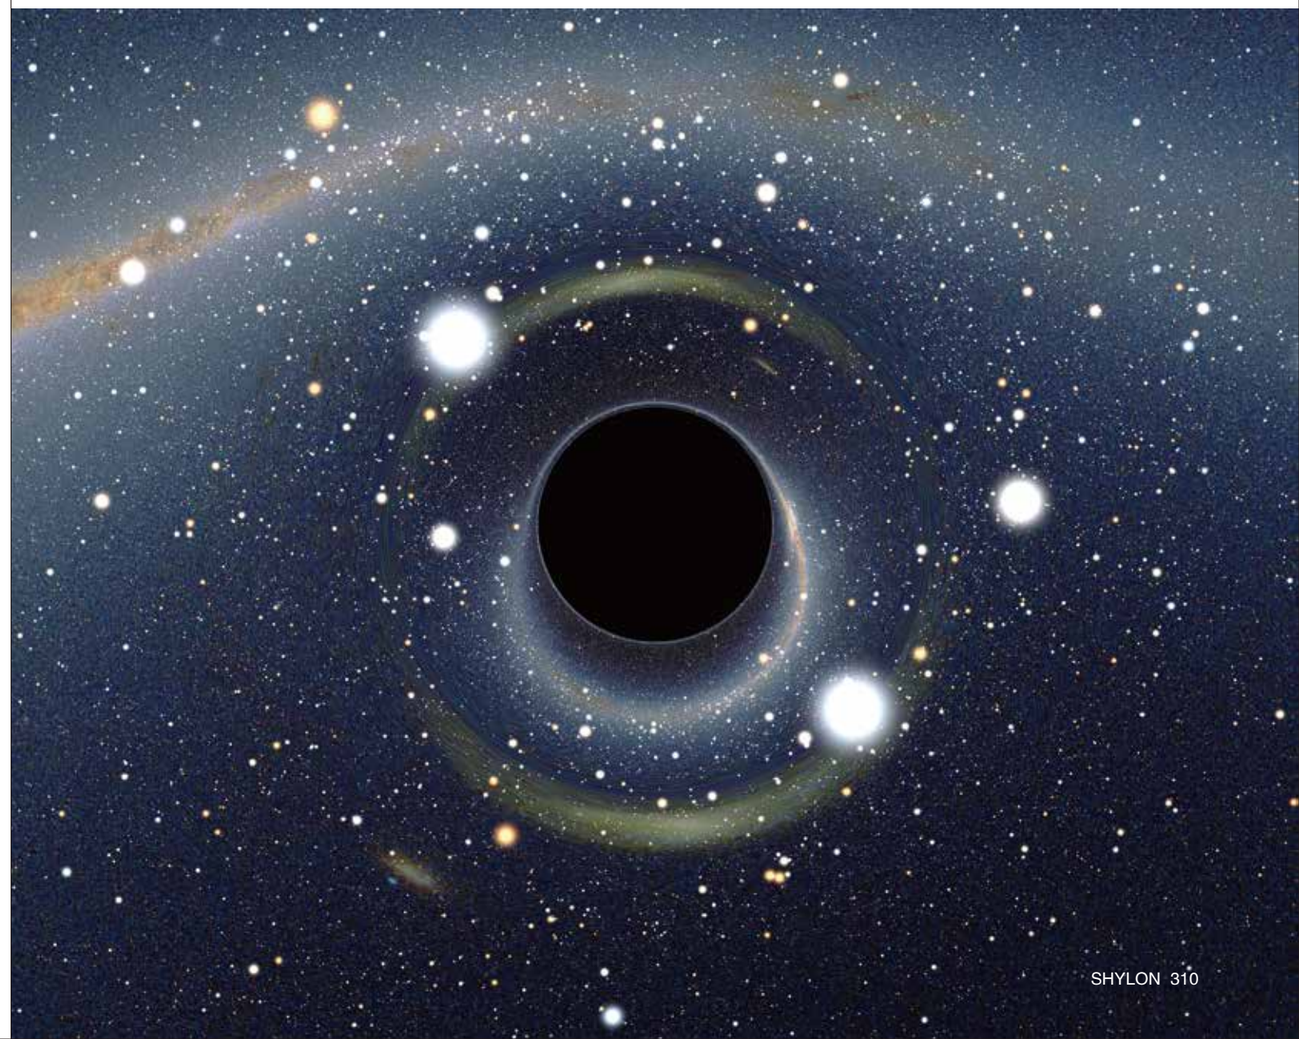

LED Highbay Light Series

SL0181C



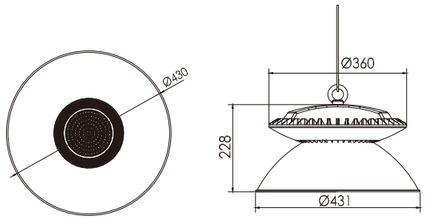

产品简介 Product Introduction


一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命.
二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光
五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能.

1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.


技术参数 Specification

产品型号/Product Code	SL0181C–110
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	33pcs
额定功率/Rated Power	110W
输入电压/Input Voltage	AC100–305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

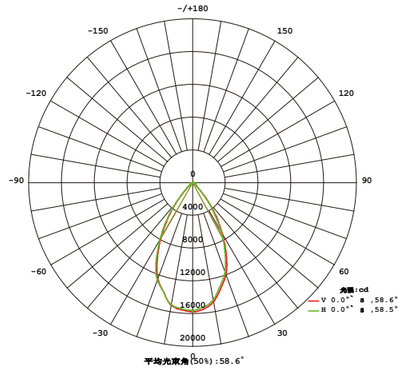


SL0181 60°

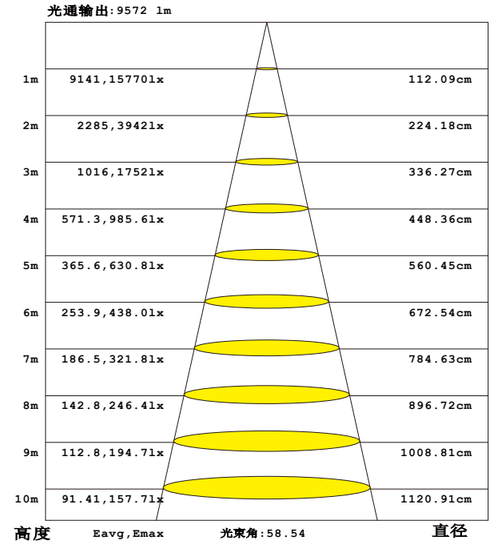

LED Highbay Light Series

SL0182U



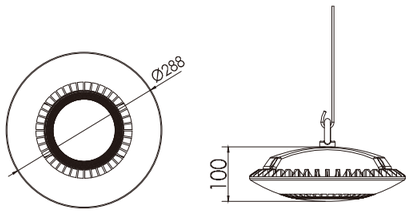

技术参数 Specification

产品型号/Product Code	SL0182U–55
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	20Pcs
额定功率/Rated Power	55W
输入电压/Input Voltage	AC100–305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

产品简介 Product Introduction

一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命.
二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光
五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能.


1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.



LED Highbay Light Series

SL0182C



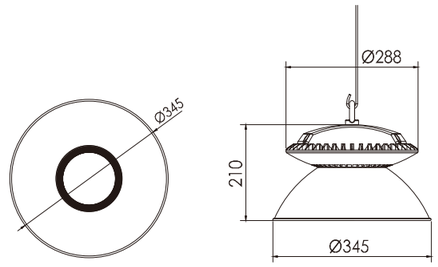


产品简介 Product Introduction

一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命.
二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光
五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能.

1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0182C–55
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	20Pcs
额定功率/Rated Power	55W
输入电压/Input Voltage	AC100–305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

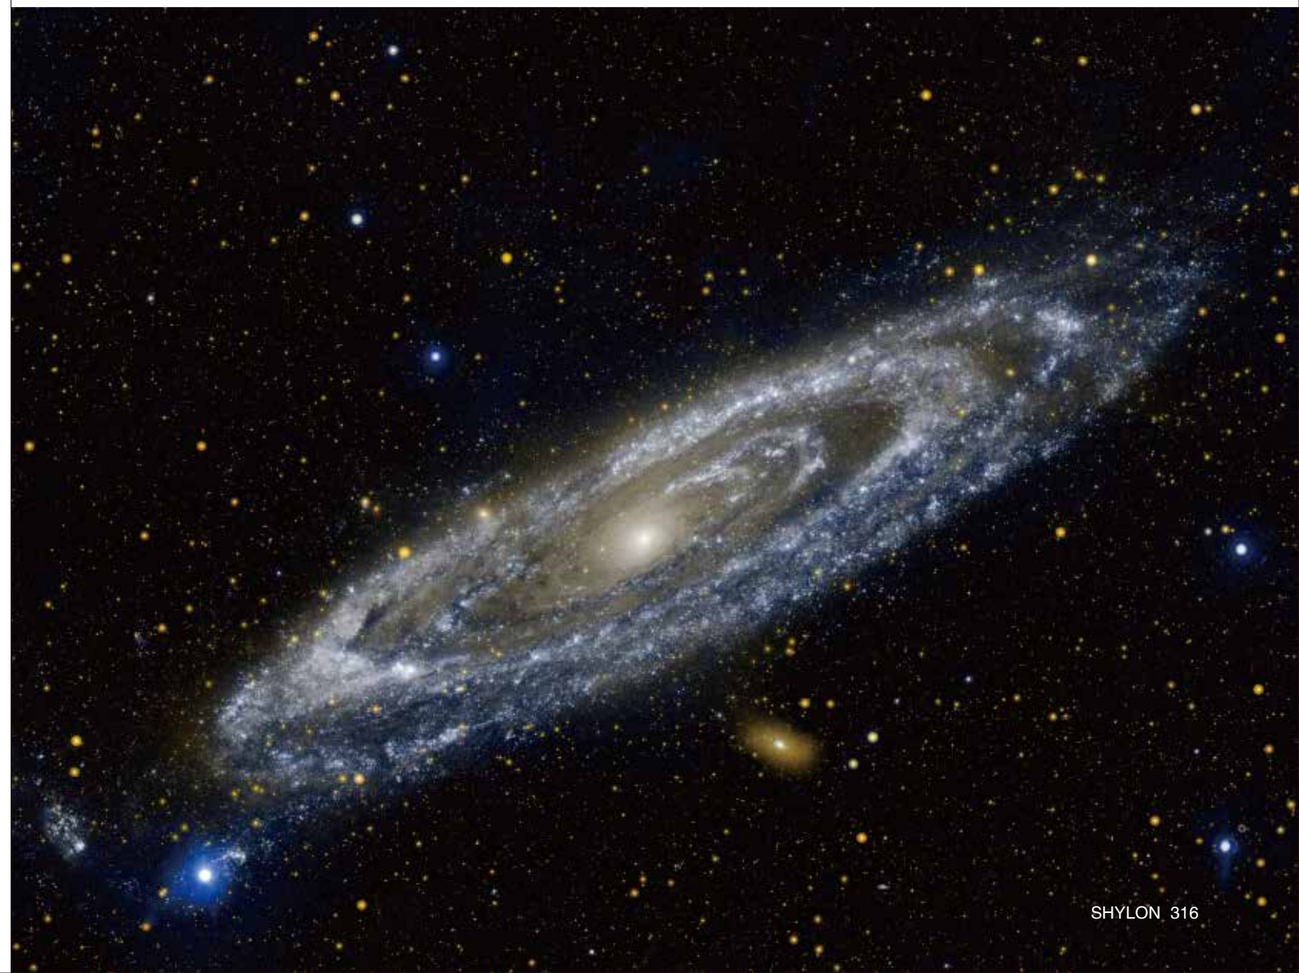

Control System
SL–E2120K 联机主控器
SL–E2120K Master Controller

产品简介 Product Introduction

SL–E2120K是一台大型联机主控制器，配合SL–E3200分控器使用；可带载15W个像素点，SD卡存储，外配遥控器，可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整、内置动画测试程序、RGBW四色灯具控制等功能；即可以控制DMX512通讯的灯具又可以控制SPI、单线、双线灯具（不可同时控制）极大满足了客户再应用及调试中的多种需求。

SL – E2120K is a large–scale online master controller, cooperates with slave controller– SL – E3200 in application. SL–D2120K is access to load 0.15 million pixels with SD card storage and remote controller, which can implement function, such as the play fragment selection, overall brightness adjustment, the white balance adjustment, play speed adjustment, built–in animation test program, RGBW four–color fixture lighting control and etc. SL – E2120K is the combination of DMX512 and SPI ,single wire, dual wire lamps serial control(can not be selected simultaneously) ,which immensely meets the various demand from customers during the application and debugging.



主要性能特点 Main performance

1、采用16GB的大容量U盘存储数据，花样更丰富多彩；
2、具有LCD中文或者英文显示界面，操作直观方便。
3、具有节目选择、速度调节及亮度设置等功能满足不同场所的需要
4、控制器及灯具排列方式任意，灵活性超强
5、具备同步控制（联机）和异步控制（脱机）双功能；既可以同步直播电脑的视频，也可以播放U盘里的视频；当同时连接电脑和插入U盘时，优先播放电脑的视频。
6、多种控制方式，具DMX512、SPI、单线、双线控制于一身；配合分控可带载15万像素点，适用于大型项目。
7、支持H264(MPEG–4)格式视频实时播放

(1) Adopt the large volume of 16GB SD card to store data with various programs.
(2) Own LCD Chinese and English display interface with features of easy operation intuitive.
(3) Equip with function of program selection, speed adjustment and brightness set–up and etc. to satisfy demands on various occasions.
(4) Allow the arbitrary layout with controllers and luminaires, achieving high flexibility.
(5) Support working on–line, and cooperate with slave controller off–line; when on line, it achieves real–time synchronization work, the working performance of LED luminaire is matched with the display on a computer screen.
(6) Offer various controller methods, such as DMX512 and SPI; SL–D8000 is access to load 0.12 million pixels when cooperated with slave controller, it is especially applied to large–scale projects.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名 称 / Product name	LED智能主 控制器/ LED intelligent master controller
2	型 号 / Item No.	SL–E2120K
3	尺寸 / Dimension	288(L)x158（W）x45（H）mm
4	电 源 / Driver	AC100~220V 60/50Hz
5	额定功率 / Rated power	15W
6	控制点数 / Control pixel	15万像素点/0.15million pixels
7	控制效果 / Control effect	任意花样的文字动画 图案 视频影像/Present various words, animation, images, video
8	SD卡容量/SD card volume	16GB
9	通讯接口 / Communication interface	RJ45、 HDMI
10	节目数量/Program quantity	≤99个 / ≤99 units
11	速度等级 / Speed grade	100级 / 100 Grade
12	可调亮度等级 / Brightness adjustment grade	100级 / 100 Grade
13	防护等级 / Protection grade	IP20
14	工作温度 / Work temperature	–40℃ ~ 50℃
15	固定孔间距 / Fixed hole interval	268mm
16	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System
SL–E3200K 分控器
SL–E3200 Slave Controller

产品简介 Product Introduction

SL–E3200是一套配合SL–E2120K使用的分控器，控制系统实现R G B各256级灰度，共可表现1677万种颜色，真正实现全彩色。8端口输出，每端口可带载170个全彩点并支持扩展。独有的在线自动寻址技术，以最方便简洁的线路排布实现复杂的控制功能，极大地提高了产品的可靠性和稳定性。既可以连接电脑同步工作，又可以连接脱机播放器同步工作。在多机联合同步控制时，可轻松将文字、动画、图像、视频等媒体信息完整再现于您的LED工程项目中。 配套主控为SL–E2120K。

SL – E3200 is a slave controller which cooperates with master controller –SL –M2120K in application. SL–E3200 enables it achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. There are 8 ports output with load of 170 pixels per port which supports extension. SL–E3200 is equipped with online automatic addressing technology, the complex control function is accomplished by this most concise and convenient approach, which tremendously improves reliability and stability of the products. SL–E3200 supports working on–line or connecting the off–line player to achieve synchronization work; In the system of connection with many controllers, it is simple to make words, animation, images, video and etc media information completely be represented in your LED project.



主要性能特点 Main performance

1. 每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
2. 控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
3. 512级三基色独立亮度控制，使精确调整白平衡更加简单有效；
4. 控制器显示模块及时显示控制器参数、状态。
5. 双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
6. 支持多种播放模式：手动、节假日、每日、时段及自定义等。可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
7. 播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
8. 支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。

1. Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off–line player.
2. Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100 meters.
3. 512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
4. The controller displays module presents its parameter and status timely.
5. Double internet interface can realize the cascade connection between controllers; the controller makes self–detected automatically, then the software indicates the connection status intuitively.
6. Support multiple display modes: manual, holidays, day, fragment, self–define and so on. It can easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
7. The adjustable range for play speed is 1–100 frames per second, 1–100 grade for brightness.
8. Allow the control of luminaire with red, green, blue, white four colors; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special functions, immensely meet the diversified demands from customers.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名 称 / Product name	LED智能主 控制器/ LED intelligent master controller
2	型 号 / Item No.	SL–E2120K
3	尺寸 / Dimension	288(L)x158（W）x45（H）mm
4	电 源 / Driver	AC100~220V 60/50Hz
5	额定功率 / Rated power	15W
6	控制点数 / Control pixel	15万像素点/0.15million pixels
7	控制效果 / Control effect	任意花样的文字动画 图案 视频影像/Present various words, animation, images, video
8	SD卡容量/SD card volume	16GB
9	通讯接口 / Communication interface	RJ45、 HDMI
10	节目数量/Program quantity	≤99个 / ≤99 units
11	速度等级 / Speed grade	100级 / 100 Grade
12	可调亮度等级 / Brightness adjustment grade	100级 / 100 Grade
13	防护等级 / Protection grade	IP20
14	工作温度 / Work temperature	–40℃ ~ 50℃
15	固定孔间距 / Fixed hole interval	268mm
16	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL–M2120K 联机主控器

SL–M2120K On–line Master Controller

产品简介 Product Introduction



SL–M2120K是一台大型联机主控制器，配合SL–M3200、SL–M3200R分控器使用；可带载15万个像素点，SD卡存储，外配遥控器，可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整、内置动画测试程序、RGBW四色灯具控制等功能；即可以控制DMX512通讯的灯具又可以控制SPI、单线、双线灯具（不可同时控制）极大满足了客户再应用及调试中的多种需求。

SL–M2120K is a large–scale online master controller, cooperates with slave controller SL – M3200 ,SL–M3200R in application. SL–M2120K is access to load 0.15 million pixels with SD card storage and the remote control, which can implement function, such as the off–line timing play, play fragment selection, overall brightness adjustment, the white balance adjustment, play speed adjustment, built–in animation test program, RGBW four–color fixture lighting control and etc. SL – M2120K is the combination of DMX512 and SPI serial control(can not be selected simultaneously) ,which immensely meets the various demand from customers during the application and debugging.

主要性能特点 Main performance

1、采用8GB的大容量SD存储卡存储数据，花样更丰富多彩。
2、具有LCD中文或者英文显示界面，操作直观方便。
3、具有节目选择、速度调节及亮度设置等功能满足不同场所的需要。
4、控制器及灯具排列方式任意，灵活性超强。
5、既可以与电脑联机同步工作，又可以配合分控脱机工作。与电脑联机实时同步工作，LED灯具显示效果与电脑屏幕一致。
6、多种控制方式，具DMX512、SPI、单线、双线控制于一身；配合分控可带载15万个像素点，适用于大型项目。

1、Adopt the large volume of 8GB SD card to store data with various programs.
2、Own LCD English display interface with features of easy operation intuitive.
3、Equip with function of program selection, speed adjustment set–up and etc. to satisfy demand on various occasion.
4、Allow the arbitrary layout with controllers and luminaires, achieve high flexibility.
5、Support working on–line, and cooperate with slave controller off–line; when on line, it achieves real–time synchronization work, the working performance of LED luminaire is matched with the display on a computer screen.
6、Offer various controller methods, such as DMX512 and SPI; SL–M2102K is access to load 0.15 million pixels when cooperated with slave controller, it is especially applied to large–scale projects.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名称/Product name	LED智能主控制器/ LED intelligent master controller
2	型号/Item No.	SL–M2120K
3	外形尺寸/Dimension	283（L）×134（W）×45（H）mm
4	电源/Driver	AC 100~240V 60/50Hz
5	额定功率/Rated power	15W
6	控制点数/Control pixel	15万像素点/0.15million pixels
7	控制效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
8	SD卡容量/SD card volume	8GB
9	通讯接口/Communication interface	RJ–45
10	节目数量/Program quantity	≤99个/≤99units
11	速度等级/Speed grade	100级 / 100 Grade
12	可调亮度等级/Brightness adjustment grade	100级 / 100 Grade
13	防护等级/Protection grade	IP20
14	工作温度/Work temperature	–40℃ ~ 50℃
15	固定孔间距/Fixed hole interval	68mm;268mm
16	适用场所/Application	户外、室内LED亮化工程/Outdoor and indoor led lighting project

Control System

SL–M3200 分控器

SL–M3200 Slave Controller

产品简介 Product Introduction



SL–M3200是一套配合SL–M2120K、SL–B2120K使用的分控器，控制系统实现R G B各256级灰度，共可表现1677万种颜色，真正实现全彩色。8端口输出，每端口可带载170个全彩点并支持扩展。独有的在线自动寻址技术，以最方便简洁的线路排布实现复杂的控制功能，极大地提高了产品的可靠性和稳定性。既可以连接电脑同步工作，又可以连接脱机播放器同步工作。在多机联合同步控制时，可轻松将文字、动画、图像、视频等媒体信息完整再现于您的LED工程项目中。

SL – M3200 is a slave controller which cooperates with master controller SL –M2120K、SL–B2120K in application. SL–M3200 enables it achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. There are 8 ports output with load of 170 pixels per port which supports extension. SL–M3200 is equipped with online automatic addressing technology, the complex control function is accomplished by this most concise and convenient approach, which tremendously improves reliability and stability of the products. SL–M3200 supports working on–line or connecting the off–line player to achieve synchronization work; In the system of connection with many controllers, it is simple to make words, animation, images, video and etc media information completely be represented in your LED project.

主要性能特点 Main performance

1、每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
2、控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
3、512级三基色独立亮度控制，使精确调整白平衡更加简单有效。
4、控制器显示模块及时显示控制器参数、状态。
5、双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
6、支持多种播放模式：手动、节假日、每日、时段及自定义等。可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
7、播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
8、支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。

1、Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off–line player.
2、Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100 meters.
3、512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
4、The controller display module presents its parameter and status timely.
5、Double internet interface can realize the cascade connection between controllers; the controller makes self–detected automatically, then the software indicates the connection status intuitively.
6、Support multiple display modes: holidays, day, fragment, self–define and so on. It easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
7、The adjustable range for play speed is 1–100 frames per second, 1–100 grade for brightness.
8、Allow the control of luminaire with red, green, blue, white four color; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special function, immensely meet the diversified demand from customers.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名称/Product Name	LED智能分控制器 / LED intelligent slave controller
2	型号/Item NO.	SL–M3200
3	外形尺寸/Dimension	283 （L）x134（W）x45（H）mm
4	电源/Driver	AC220V 50Hz
5	额定功率/Rated power	15W
6	输出路数/Output ways	8路（DMX512）/ 8 ports for DMX512
7	控制点数/Control points	1360像素可支持扩展 / 1360 pixels for DMX, support extension
8	驱动效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
9	通讯接口/Communication interface	RJ45
10	时钟类型/Communication interface	年、月、日、时、分、秒、星期 / Year, month,day,hour,minute,second,week
11	播放模式/Clock type	手动、节假日、每日、时段、自定义 / Manual, holiday,day,fragment,self–definite
12	速度等级/Speed grade	100级 / 100 grade.
13	可调亮度等级/Brightness adjustment grade	100级 / 100 grade.
14	防护等级/Protection grade	IP20
15	寻址方式/Addressing method	自动寻址，所有灯具地址可以任意编辑 Automatic addressing (each luminaire can be addressed and located in sequence)
16	工作温度/Work temperature	–40℃ ~ 50℃
17	固定孔间距/Fixed hole interval	68mm ; 268mm
18	适用场所/Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL–M3200R 分控器
SL–M3200R Slave Controller

产品简介 Product Introduction



SL–M3200R控制器支持标准RDM技术标准协议，基于DMX512–A标准协议，组建LED控制应用的RDM系统，其控制系统具备与标准DMX512相关控制应用的全部功能，并集成RDM控制命令的发送、RDM反馈信息的接收、及RDM信息的显示等功能，能够通过控制系统实时检测LED灯具的工作状态，如灯具的电流、电压、温度、运行时间等信息，是一套配合SL–M2120K、SL–B2120K使用的RDM分控器。

SL–M3200R Controller supports standard RDM Technical Standard Protocol, based on DMX512–A Standard Protocol, builds RDM system for LED control application, SL–M3200R control system has all the functions related to the standard DMX512 control application,and also integrates the functions of sending and receiving feedback information of RDM control command and displaying RDM information, etc. SL–M3200R can real–time detect the working state of LED lamps by control system, such as current, voltage, temperature, operating time and so on, it is a set of RDM slave controller used with SL–M2120K, SL–B2120K.

主要性能特点 Main performance

1、控制器输出基于标准DMX512–A协议，全面支持标准RDM技术标准协议。
2、配合标准RDM协议的LED灯具，支持灯具工作状态的检测，如灯具的电流、电压、功率、温度、运行时间等灯具工作状态参数。
3、每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
4、控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
5、512级三基色独立亮度控制，使精确调整白平衡更加简单有效。
6、控制器显示模块及时显示控制器参数、状态。

7、双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
8、支持多种播放模式：手动、节假日、每日、时段及自定义等；可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
9、播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
10、支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。

1、Controller output based on DMX512–A Standard Protocol, overall support RDM Technical Standard Protocol.
2、LED lamps in accordance with RDM Standard Protocol to support the detection of the working state of lamps, such ascurrent, voltage, power, temperature, operating time and other working state parameters
3、Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off–line player.
4、Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100meters.
5、512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
6、The controller display module presents its parameter and status timely.
7、Double internet interface can realize the cascade connection between controllers; the controller makes self–detected automatically, then the software indicates the connection status intuitively.
8、Support multiple display modes: holidays, day, fragment, self–define and so on. It easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
9、The adjustable range for play speed is 1–100 frames per second, 1–100 grade for brightness.
10、Allow the control of luminaire with red, green, blue, white four color; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special function, immensely meet the diversified demand from customers.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名 称 / Product name	LED智能分控制器 / LED intelligent slave controller
2	型 号 / Item No.	SL–M3200R
3	尺寸 / Dimension	283 （L）x134（W）x45（H）mm
4	电 源 / Driver	AC220V 50Hz
5	额定功率 / Rated power	15W
6	输出路数 / Output port	8路（DMX512、RDM）/ 8 ports for DMX512、RDM
7	控制点数 / Control pixel	1360像素可支持扩展 / 1360 pixels for DMX, support extension
8	控制效果 / Control effect	文字 动画 图案 视频 / words,animation,images,video
9	通讯接口 / Communication interface	RJ45
10	时钟类型 / Communication interface	年、月、日、时、分、秒、星期 / Year, month,day,hour,minute,second,week
11	播放模式 / Clock type	手动、节假日、每日、时段、自定义 / Manual, holiday,day,fragment,self–definite
12	速度等级 / Speed grade	100级 / 100 grade.
13	可调亮度等级 / Brightness adjustment grade	100级 / 100 grade.
14	防护等级 / Protection grade	IP20
15	寻址方式 / Addressing method	自动寻址，所有灯具地址可以任意编辑 Automatic addressing (each luminaire can be addressed and located in sequence)
16	工作温度 / Work temperature	–40℃ ~ 50℃
17	固定孔间距 / Fixed hole interval	68mm ; 268mm
18	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL–B2120K BTS基站同步SIM程控主控器

SL–B2120K BTS Base Station Synchronous SIM Program Control Master Controleler

产品简介 Product Introduction



SL–B2120K主控器是基于Android平台与SIM通讯平台开发的远程控制BTS基站同步脱机主控器。

SL–B2120K依托于SIM通讯，通讯采用800MHz–900MHz频段，具备强大的穿透能力，无盲区的覆盖率，保证了远程遥控指令的高稳定性与高有效性。

利用Android平台与SIM通讯的稳定性及普及率，用户可采用Android移动终端的APP软件，通过移动终端SIM通讯发送短信息，来控制卫星同步主控器中的节目片断、播放速度及亮度调整等功能。

SL–B2120K主控器采用BTS基站通讯模块，通过连接设备所在地周边通讯基站，取得基站中高精度的授时信号以实现同步联动控制。

SL–B2120K 主控器实现稳定、简便的远程遥控功能，主要应用于多栋楼宇联动的脱机项目，针对于项目甲方越加严格的工程要求，SL–B2120K主控器这种远程遥控技术极大的满足了客户的需求。

SL–B2120K master controller is one remote control BTS base offline master controller which is based on the Android platform and the SIM communication platform.

SL–B2120K relies on SIM communication, and the communication adopts 800MHz–900MHz frequency band, has a strong penetrating ability, no blind area coverage, to ensure the high stability and high efficiency of remote command.

With the Android platform and the SIM communication stability and penetration, the users can send messages to control the satellite synchronization master controller’s program clips, playback speed, and brightness adjustments via mobile terminal APP of android.

SL–B2120K adopts BTS base station communication module, through connecting the equipment around the communication base stations to obtain high accuracy signal and reach the synchronized linkage control

SL–B2120K master controller realized stable and simple remote control function,mainly used in the offline project of multiple buildings.Re–garding the strict engineering requirements of project party A,SL–B2120K master controller with the remote control technology is greatly satisfying the requirements of customers.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名称/Product name	BTS基站同步SIM程控主控器/ BTS base station synchronous SIM program control master controleler
2	型号/Item No.	SL–B2120K
3	外形尺寸/Dimension	283（L）×134（W）×45（H）mm
4	电源/Driver	AC 100~240V 60/50Hz
5	额定功率/Rated power	15W
6	控制点数/Control pixel	15万像素点/0.15million pixels
7	控制效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
8	SD卡容量/SD card volume	8GB
9	通讯接口/Communication interface	RJ–45
10	节目数量/Program quantity	≤99个/≤99units
11	速度等级/Speed grade	100级 / 100 Grade
12	可调亮度等级/Brightness adjustment grade	100级 / 100 Grade
13	防护等级/Protection grade	IP20
14	工作温度/Work temperature	–40℃ ~ 50℃
15	固定孔间距/Fixed hole interval	68mm;268mm
16	适用场所/Application	户外、室内LED亮化工程/Outdoor and indoor led lighting project

Control System

SL–Y2000 主控制器

SL–Y2000 Master Controller

产品简介 Product Introduction



SL–Y2000主控制器是DL–D2000主控器的升级产品；是一套用于建筑室内外亮化控制的LED全彩控制系统，控制系统实现R G B各256级灰度，共可表现1677万种色彩，真正实现全彩色。集DMX512与SPI串行控制于一身的控制器；SL–Y2000控制器采用触摸屏控制，配备一块4.3英寸电容屏，完美的人机交互界面，轻松上手，操作简单，功能完善。

SL–Y2000 master controller is an upgraded product of the SL–D2000 which is applied to lighting for the indoor and outdoor building, achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. SL – Y2000 controller combines DMX512 with SPI serial control; applies touch screen control with 4.3 inch capacitor screen. Perfect human–machine interface, easy to use, simplify to operate and with perfect function.

主要性能特点 Main performance

1、采用4G TF卡（标配）存储数据，花样更丰富多彩。
2、系统支持自动，定时，节日预设效果播放。
3、控制器的触摸屏采用下沉设计，有效地保护触摸屏，防误接触。
4、可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整等。
5、具有DMX512信号，兼容同步串行移位数据信号（不可同时输出），方便灵活的满足客户的多种需求。
6、不可联机；可选择GPRS同步、交流同步、同步线同步或者无同步。

1、Adopt 4GB TF card to store data with various programs.
2、The system supports playing programs automatically, timing, and festival preset effects.
3、The touch screen of the controller with sinking design, which can protect touch screen effectively, prevented mistaking touch.
4、SL–Y2000 can realize program segment selection, overall brightness adjustment, white balance adjustment, play speed adjustment, etc.
5、Combine DMX512 signal with synchronous serial shift data signal (can not output simultaneously), flexible to meet types of requirements from customers.
6、Not supported online control; can select GPRS synchronization, AC synchronization, synchronous line synchronization or no synchronization.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名称/Product Name	LED智能控制器/LED intelligent master controller
2	型号/Item NO.	SL–Y2000
3	外形尺寸/Dimension	153（L）x 90（W）x 31（H）mm
4	电源/Driver	AC 9V/DC 7.5V–24V/ DC 5V
5	额定功率/Rated power	15W
6	输出路数/Output ways	2路 DMX512 或2路SPI（不可同时使用）/2 ports for DMX512,2 ports for SPI (can not be selected simultaneously)
7	控制点数/Control points	DMX 340像素（SPI为1024像素）并支持扩展 / 340 pixels for DMX(1024 pixels for SPI)support extension
8	驱动效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
9	TF卡容量/ TF card volume	4GB
10	通讯接口/Communication interface	无通讯接口/Without cascade and communication interface
11	节目数量/Program quantity	≤80个 / ≤80 units
12	速度等级/Speed grade	100级 / 100 Grade
13	可调亮度等级/Brightness adjustment grade	100级 / 100 Grade
14	防护等级/Protection grade	IP20
15	寻址方式/Addressing method	自动寻址，所有灯具地址可任意编辑 Automatic addressing(each luminaire can be addressed and located in sequence)
16	工作温度/Work temperature	–40℃ ~ 50℃
17	固定孔间距/Fixed hole interval	无
18	适用场所/Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL–D100 信号放大器
SL–D100 Signal Amplifier

产品简介 Product Introduction

SL–D100是一款具有信号隔离功能的DMX信号中继器。

外壳采用ABS材质,高强度,耐腐蚀; 产品功耗小、屏蔽性能好、抗干扰强、稳定性强。防护等级IP65。



SL–D100 is a DMX signal amplifier with the function of signal isolation.

The housing adopts ABS material with high intensity and profound corrosion resistance; Own small power consumption, excellent shielding effectiveness, powerful anti–jamming capability, strong stability; Degree of protection IP65

规格参数表 Specification

序号/NO.		参数/Parameter
1	名称/Product Name	DMX信号隔离中继器 / DMX signal isolated amplifier
2	型号/Item N0.	SL–D100
3	外形尺寸/Dimension	122（L）x55（W）x38（H）mm
4	电源/Driver	DC6 ~ 36V/AC100–240V
5	消耗功率/Power consumption	≤2W
6	隔离电压/Isolate voltage	1000V
7	通讯接口/Communication interface	DMX512
8	传输速率/Transmission speed	≤1Mbps
9	寻址方式/Addressing mode	支持自动寻址 / Support automatic addressing
10	防护等级/Protection grade	IP65
11	环境温度/Work temperature	–40℃ ~ 50℃
12	主控配置/Master control	SL–D8000、SL–D2000、SL–D3200或者DMX512控制台 SL–D8000、SL–D2000、SL–D3200 or DMX512Console
13	固定孔间距/Fixed hole interval	110mm
14	适用场所/Application	户外、室内LED亮化工程或者舞台灯光工程 Outdoor and indoor led lighting project or stage lighting project

Control System

SL–BT100 智能控制器
SL–BT100 intelligent controller

产品简介 Product Introduction

SL–BT100是一台集控制与写码功能一体的小型控制器，主要针对于CE3401/3402芯片的写码与控制，内置多种变化效果，可手动或自动变化。

SL–BT100 is a compact controller that integrates control and code writing functions. It is mainly aimed at the code writing and control of the CE3401/3402 chip. It has a variety of built–in effects and can be changed manually or automatically.



规格参数表 Specification

序号/NO.		参数/Parameter
1	名称/Product Name	LED智能控制器 / LED intellgent DMX controller
2	型号/Item N0.	SL–BT100
3	外形尺寸/Dimension	60(L)x25(W)x25(H)mm
4	电源/Driver	DC24V
5	消耗功率/Power consumption	5W
6	输出路数/Output ports	1路DMX512/1 port for DMX512
7	控制点数/Control pie	DMX 170像素/DMX 170pixels
8	控制效果/Control effect	内置/Internal
9	SD卡/SD Card	支持自动寻址 / Support automatic addressing
10	防护等级/Protective grade	IP20
11	环境温度/Work temperature	–40℃ ~ 50℃
12	固定孔距/Fixed hole	/
13	适用场所/Application	SHYLON色彩管理系统灯具/SHYLON colorful control management system

Shanghai SHYLON Optoelectronics Technology Co., Ltd.

Shanghai: Room 120, No. 1, Lane 2, Suide Rd, Putuo District,Shanghai CHINA 200331

Kunshan: (SHYLON Industrial Park)No.1186–1, Pengqing Rd, Huaqiao, Kunshan, Jiangsu, CHINA 215332

Tel: +86–512–50339960 50339961 50339962 50339963 50339969

FAX: +86–512–50339972

Web: www.shylon.com

Mail: info@shylon.com

上海芯龙光电科技股份有限公司

上海: 上海市普陀区绥德路2弄1号 120室

昆山: 江苏省昆山市花桥镇蓬青路1186–1号(芯龙光电产业园)

电话: +86–512–50339960 50339961 50339962 50339963 50339969

传真: +86–512–50339972

官网: www.shylon.com

邮箱: info@shylon.com